思锐
SIRUI
影像随心　思锐随行

广东思锐光学股份有限公司

图纸名称：思锐ET系列说明书
物料编号：PET10-1
材　　质：100g双铜纸
展开尺寸：576x210mm
成型尺寸：72x105mm

说明书正面：

SIRUI
Professional Photographic Equipment

INSTRUCTIONS
ET Series Tripod

GUANGDONG SIRUI OPTICAL CO.,LTD.
Add: The Third Industrial District, Wuguishan Town, Zhongshan City, Guangdong, China (Zip Code: 528458)
Tel: 86-760-88897373 Fax: 86-760-88207062
E-mail: info@sirui-photo.com Website: www.sirui.com

ET Series Tripod Data Chart

	Section	Max Dia mm/inch	Min Dia mm/inch	Min Hgt mm/inch	Max Hgt mm/inch	Max H.ext mm/inch	Retracted H mm/inch	Folded H mm/inch	Monopod Max.H mm/inch	Monopod Min.H mm/inch	Weight kg/lb	Load kg/lb
ET-1004	4	25/1.0	16/0.6	130/5.1	1160/45.7	1400/55.1	480/18.9	420/16.5	/	/	1.3/2.9	8/17.6
ET-1204	4	25/1.0	16/0.6	130/5.1	1160/45.7	1400/55.1	480/18.9	420/16.5	/	/	1.1/2.4	8/17.6
ET-2004	4	28/1.1	19/0.7	135/5.3	1215/47.8	1450/57.1	500/19.7	430/16.9	/	/	1.6/3.5	12/26.5
ET-2204	4	28/1.1	19/0.7	135/5.3	1215/47.8	1450/57.1	500/19.7	430/16.9	/	/	1.3/2.9	12/26.5

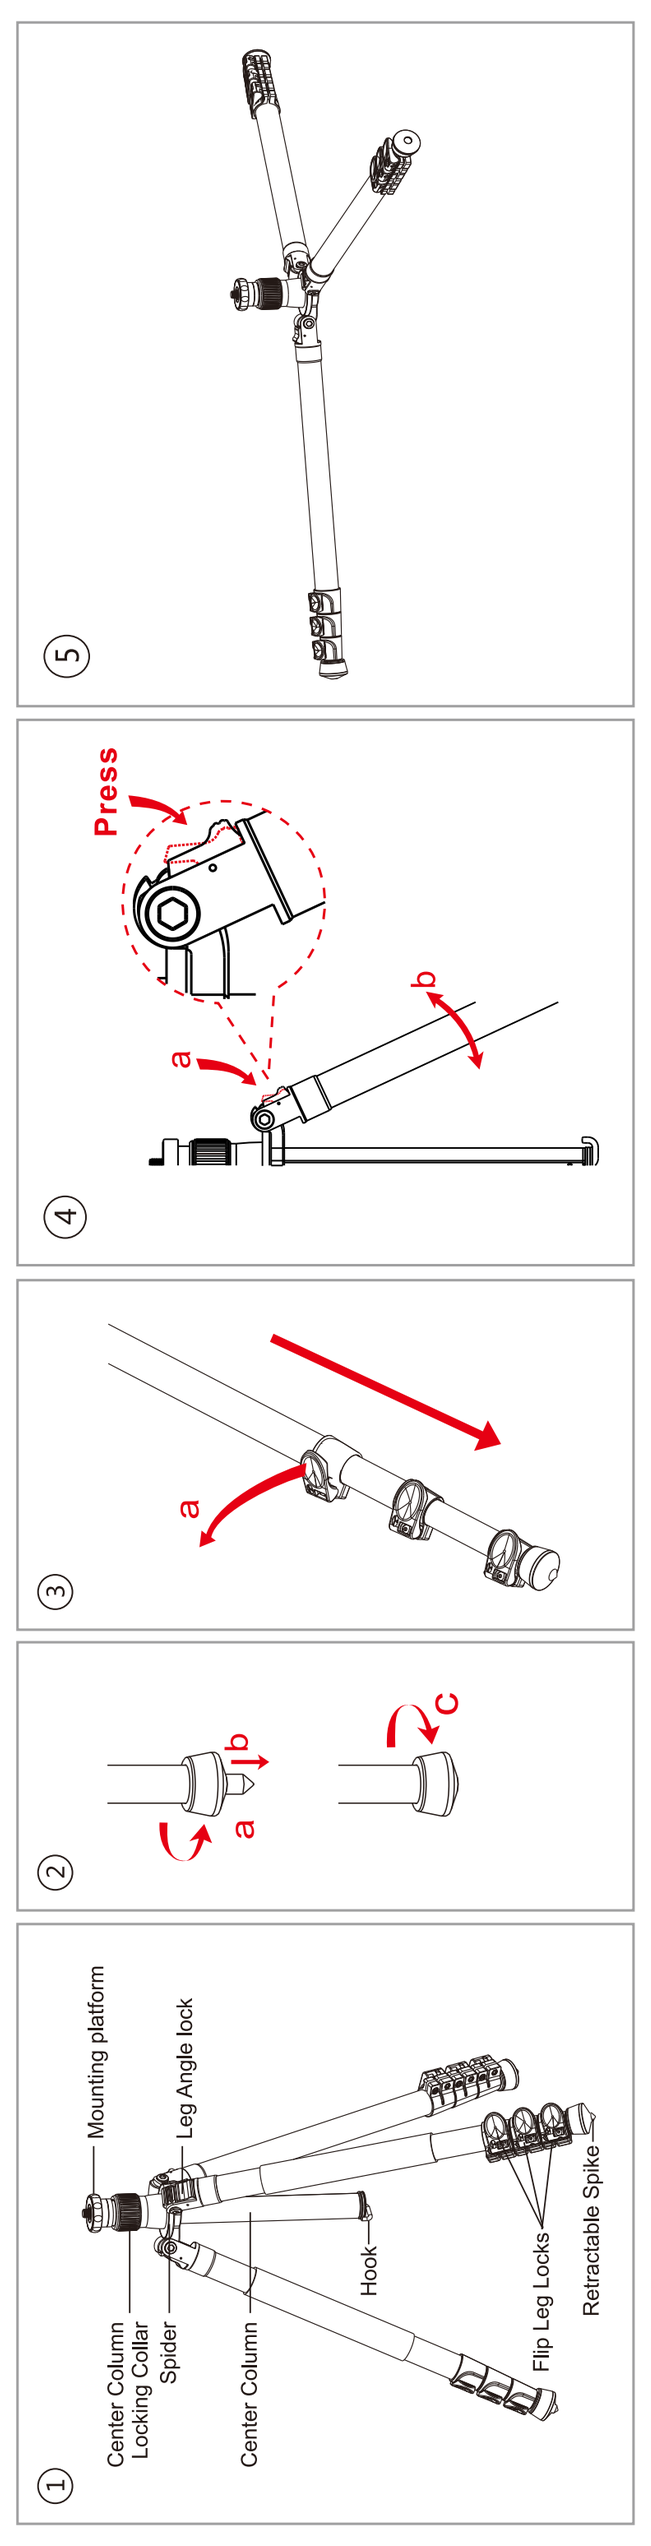

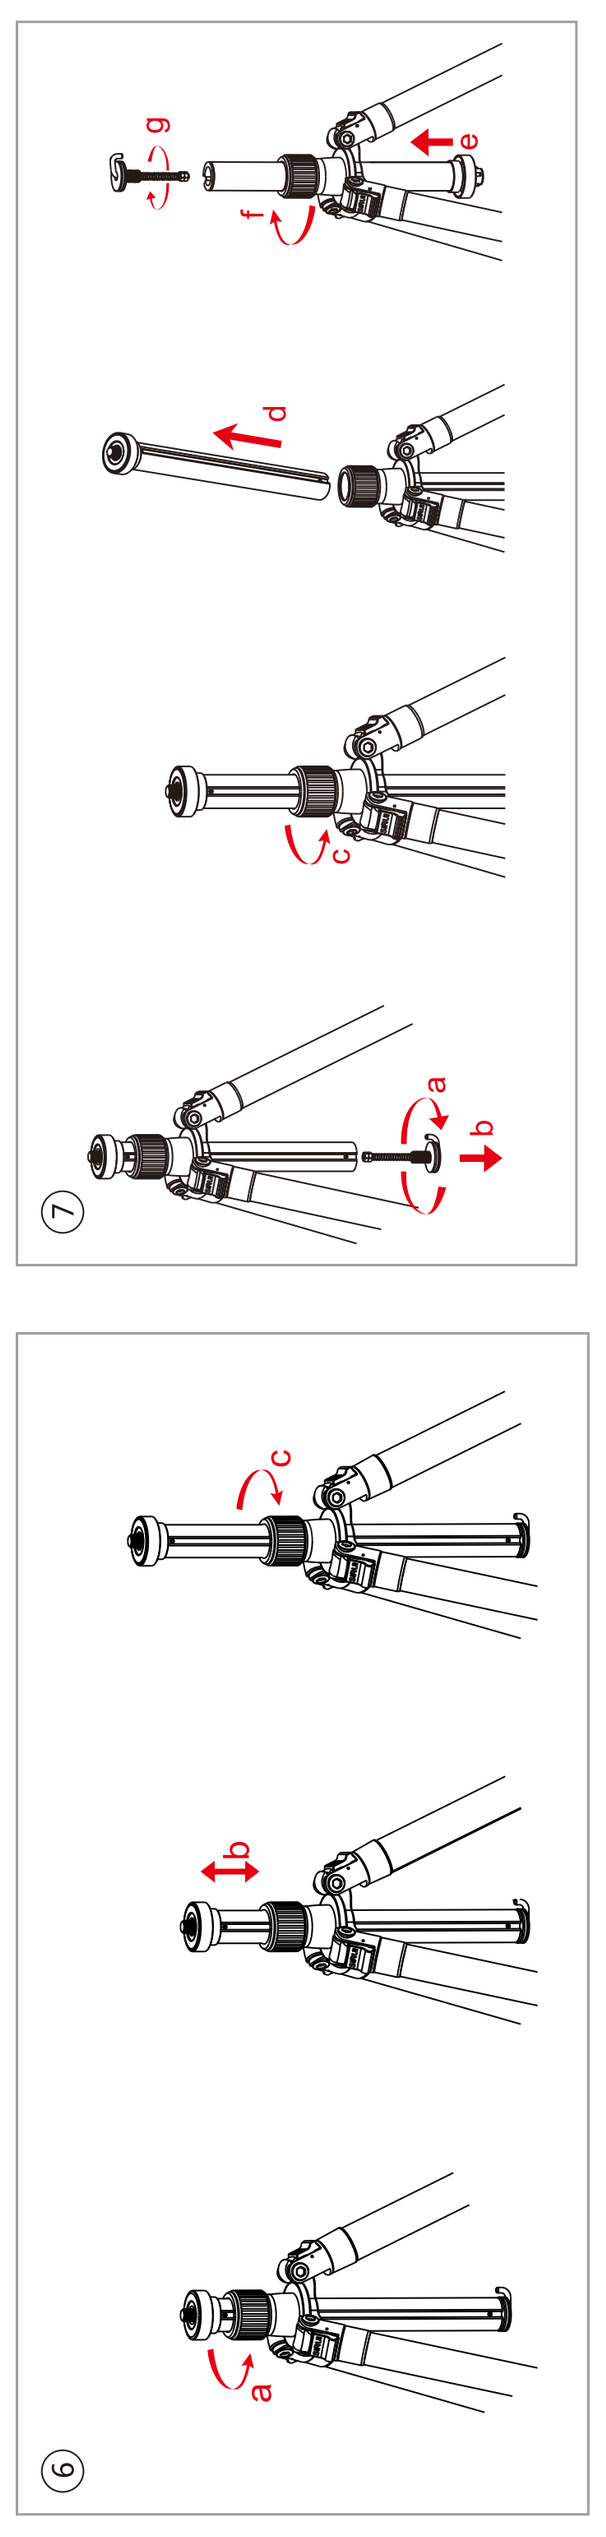

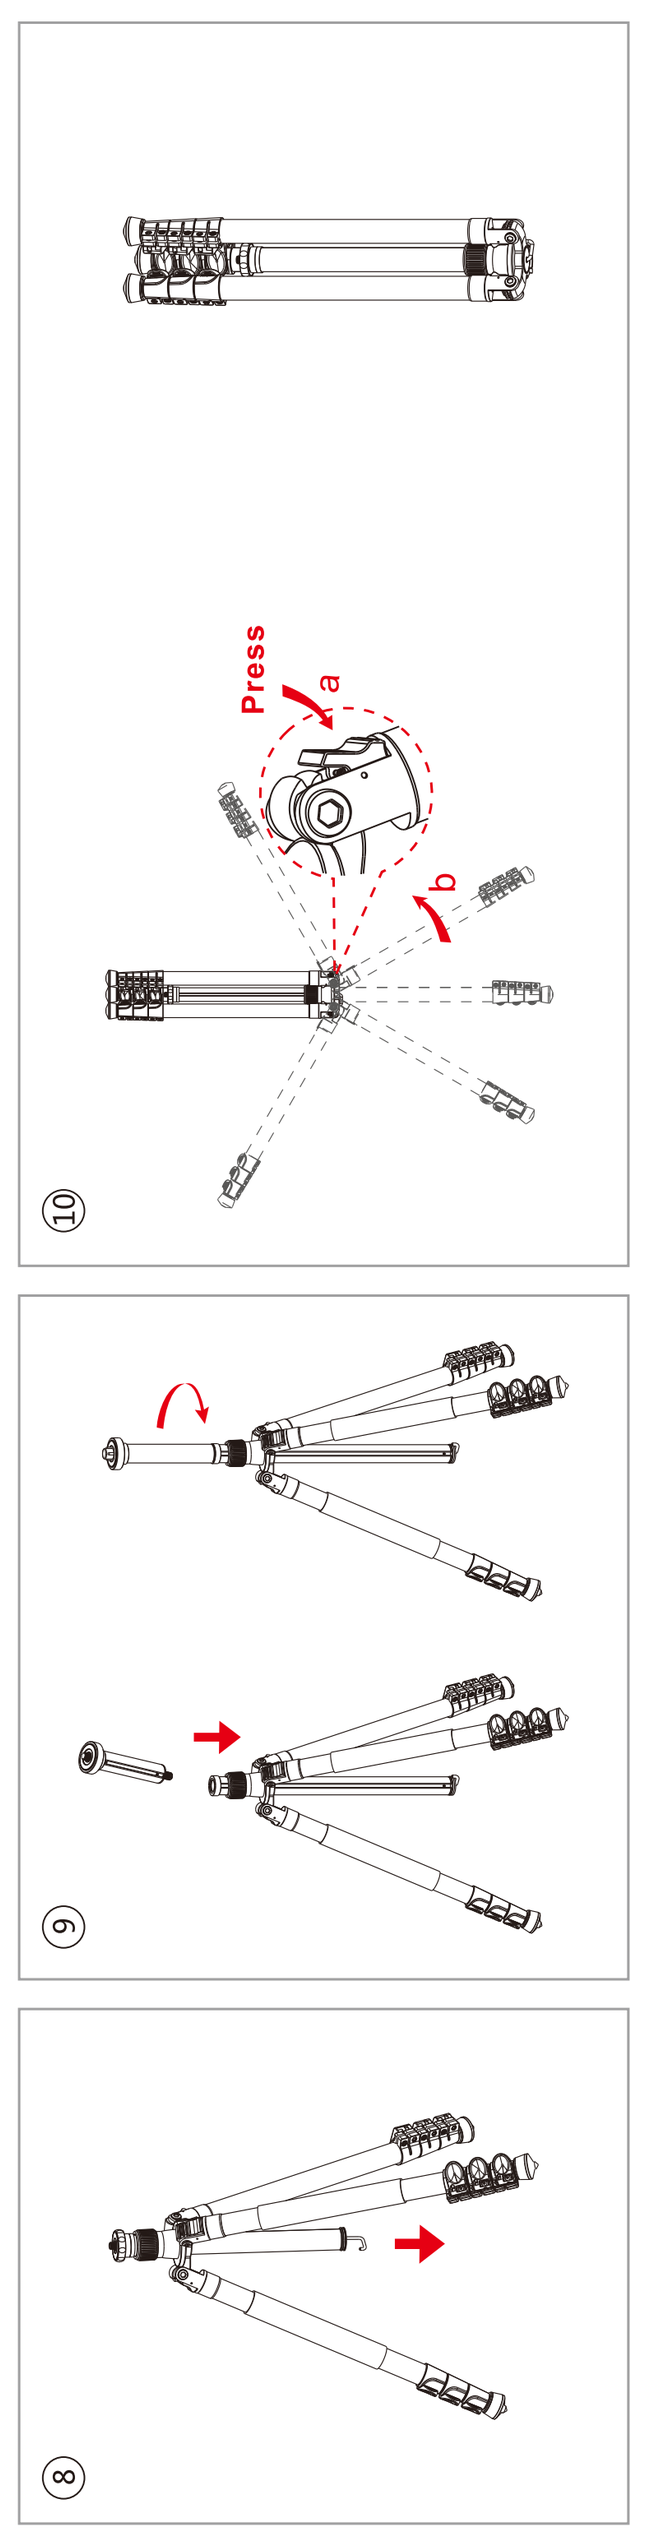

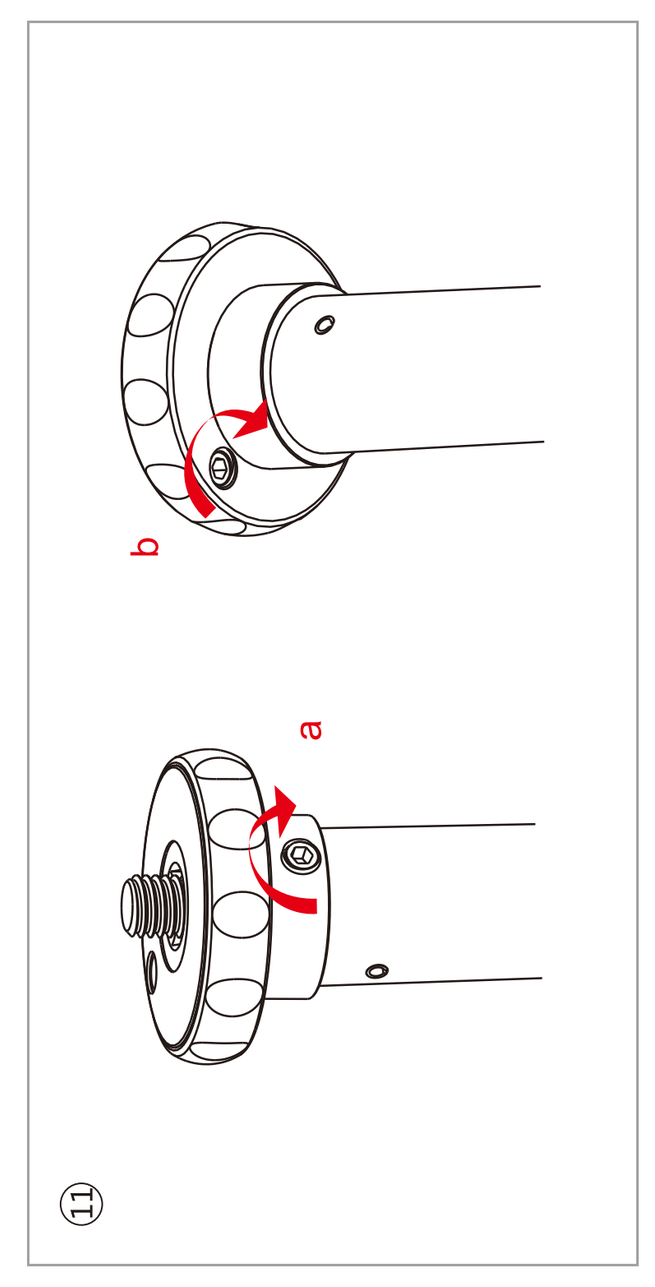

1. Know your tripod

2. Retractable Spikes
ET Tripod Series 1 (the maximum diameter of the leg tube is 25mm) only has rubber feet. All other series have retractable spikes. As shown in Figure 2, turn the rubber foot in a counter-clockwise direction ("a") until the spike is fully extended ("b"); to retract the spike, turn in a clockwise direction ("c") until the spike is hidden.

3. Leg Extension and Closing
To adjust the tripod height, unlock the legs by pulling the flip locks in direction "a" at the same time or separately, then extend the tripod legs to the length you need. Open from the biggest to the smallest leg section. To lock the legs, push the flip locks back to the original position from the smallest to the biggest leg section.

4. Leg Angle Adjustment
To meet requirements to shoot on uneven terrain, each leg can be adjusted to three different positions. While holding the Center Column, place your thumb on the Leg Angle Lock and push the leg slightly towards the Center Column. While pressing the lower part of the Leg Angle Lock ("a"), you can adjust the leg to the second or third position. There is no need to press the Leg Angle Lock when moving from the wider to narrower angle.

5. Macro shooting
Remove the Hook from the bottom of the Center Column, loosen the Center Locking Collar and lift out the long Center Column. Replace with the short Center Column and adjust the position of tripod legs to the widest angle by pushing in the Leg Angle Locks. This allows you to easily do low angle and macro-photography.

6. Center column height adjustment
Place the tripod on the floor, loosen the Locking Collar by turning in a counter-clockwise direction ("a") and adjust the Center Column to the desired height ("b"). Retighten the locking collar by turning in a clockwise direction ("c").

7. Inverting the tripod legs for storage
Remove the Hook from the bottom of the Center Column, loosen the Center Locking Collar ("c") and lift out the Center Column ("d"). Put the Center Column in from the bottom* ("e"), adjust to the desired height and retighten the Locking Collar. If you wish, you can re-attach the Hook.
Caution: Do not keep camera attached while reversing the Center Column.
※Make sure the channel in the Center Column matches the key in the tripod. Twist the Center Column if necessary.

8. Hook
At the bottom of the Center Column is a Hook that allows you to hang additional weight (sand bag, camera bag, etc.) under the tripod for added stability.

9. Lengthening the Center Column
To increase the maximum height of the tripod, you can attach the short Center column onto the long Center Column. Remove the Mounting Platform and screw, by twisting the Mounting Platform in a counter-clockwise direction. Attach the short Center column by twisting it in a clockwise direction until it stops. Note: the channel in the short Center Column will not align with the long Center Column.

10. Inverting the tripod legs for storage
Close and lock all of the legs. Loosen the Center Column Lock, raise the Center Column to its highest position and retighten the Center Column Lock. Press and hold the Leg Angle Lock ("a") and fold the leg up 180 degrees ("b").

11. Final Locking
After properly adjusting the tripod, use the allen wrench to tighten the locking screw ("a"and "b") on the Center Column for maximum stability and on the mounting base (when a tripod head is attached) to prevent the head from coming loose unexpectedly.

Attention:
- Do not exceed the recommended load limit of the head and/or tripod. (Please refer to product specifications.)
- Please make sure that the locks are securely tightened when in use.
- This product should not be used in environments that exceed the following conditions (-40 ~ +100°C/-40 ~ +212°F). And, when used in damp, dirty or dusty environments, please clean and dry thoroughly after use, to assure proper functioning in the future. It is not recommended to expose this product to saltwater. If exposed, please clean with mild soap and warm water and towel dry.
- Please keep from high temperatures and direct exposure to bright sunlight for extended periods of time.
- Please do not leave the equipment alone in a public place, which can be an inconvenience or hazard to others.
- To protect your camera gear, please remove it from the tripod/ball head when transporting from place to place.
- Please use a soft towel with warm water and mild soap to clean the locking system and gliding parts when necessary. Towel dry before storing the tripod.
- Under most situations, there is no need to lubricate any parts of this product. The addition of most lubricants will gum up the mechanisms and reduce their normal gliding characteristics. Please call or email us if you have any questions or special needs.
- Please keep this product away from all electrical power sources.

CAUTION
Please remove the camera from the tripod when changing the position of the tripod. Do not place the tripod, with camera attached, over your shoulder or carry the tripod horizontally by the legs. Strong shaking may cause damage of the screw in the mounting plate and/or the camera. Please extend the legs from the biggest tube to smallest tube; close the legs from the smallest tube to biggest tube, to avoid leg joint bushing damage.

Specifications are subject to change without notice.

WARRANTY CARD / INFORMATION

Dear SIRUI Customer,
Thank you for your purchase of SIRUI Professional Products!
SIRUI warrants that your purchase is free from defects in materials and workmanship under normal use during the Limited Warranty Period. The Warranty begins on the original date of purchase on your sales receipt and is not transferrable. If service is required, a copy of the sales receipt must be included with an explanation of the problem.

Product	Warranty Length
Tripods / Monopods / Accessories	6 years
Humidity Control Cabinet (Cabinet)	
Humidity Control Cabinet (Electronics)	3 years

Model: _ _ _ _ _ _ _ _ _ _　Date: _ _ _ _ _ _ _ _ _ _
Store: _ _ _ _ _ _ _ _ _ _　Serial Number: _ _ _ _ _ _ _ _

Warranty coverage can differ from region to region. Please see the contact information below for product registration, information and service for the region the product was purchased in.

SIRUI 6 (six) Year Limited Warranty (3 Year Warranty for Electronic Parts). This warranty shall be limited to repair, adjustment and/or replacement at SIRUI or its authorized distributors option, of defective parts, free of charge (except the cost of transportation to the distributor/service center). Responsibility is limited to the actual cost of the item. Call or Email with questions and service before sending any product to the center in your region. Below is a listing of contact information for Product Registration, Service Inquiries and Questions.SIRUI will not be responsible for expenses or inconveniences, or consequential damages to equipment, or by breach of any expressed or implied warranties.

Limitations:
Warranty is not transferable.
This warranty covers all defects encountered in normal use of the equipment and does not apply in the following cases:
1. If the equipment has been serviced by other than an authorized SIRUI Service Center.
2. Damage to the equipment is due to modification (including but not limited to, the removal of ballhead clamps), overloading, mishandling, abuse, accident, sand*, corrosives, water damage* or not following operating instructions.
3. No valid proof of purchase is provided.
4. Damage caused by acts of nature (including, but not limited to fires, floods or earthquakes).

Warranty coverage can differ from region to region. Please see contact information below for product registration,information and service for the region the product was purchased in.

Warranty Address and Contact Information:
(Please contact the seller or the local distributor where the product was purchased for warranty issues or questions and before any product is sent.)

1.Guangdong SIRUI Optical Co., Ltd.
The Third Industrial District, WuguishanTown, ZhongshanCity, Guangdong, China
Tel:0086-760-88897373　Fax:0086-760-88207062
Http://www.sirui.com　E-mail: info@sirui-photo.com
Service Hotline: 0086-400 830 2299
Complaint Hotline: +86-181 6563 9388
(Monday to Friday: 8:15am~12:15pm, 14:00pm~18:00pm)

2.SIRUI USA, LLC
Add: 29 Commerce Court Verona, NJ 07044
www.sirui.com
Service: Toll Free 866-373-0829　E-mail: info@sirui.com
FOR PRODUCTS PURCHASED IN THE USA PLEASE SEE:
For full details on USA Warranty Terms and Limitations:
https://www.siruiusa.com/warranty.html
To register products: https://www.siruiusa.com/product-registration.html

3. European Service Center
Add: SIRUI Optical GmbH • Ernst-Augustin-Str.1a • 12489 Berlin • Germany
Phone:+49 30 991 94 94 00 •　Email: Info@siruioptical.eu

说明书背面：

SIRUI
影像随心 思锐随行

使用说明
ET系列三脚架

广东思锐光学股份有限公司
地址：广东省中山市五桂山第三工业区　邮编：528458
电话：0760-88897373　传真：0760-88207062　服务热线：400 830 2299
邮箱：info@sirui-photo.com　网址：www.sirui.com

ET系列三脚架参数

	节数	最大管径 mm	最小管径 mm	最小高度 mm	不升中轴高 mm	最大高度 mm	收缩高度 mm	折叠高度 mm	最大高度 mm	最小高度 mm	自身重量 kg	最大负重 kg
ET-1004	4	25	16	130	1160	1400	480	420	/	/	1.3	8
ET-1204	4	25	16	130	1160	1400	480	420	/	/	1.1	8
ET-2004	4	28	19	135	1215	1450	500	430	/	/	1.6	12
ET-2204	4	28	19	135	1215	1450	500	430	/	/	1.3	12

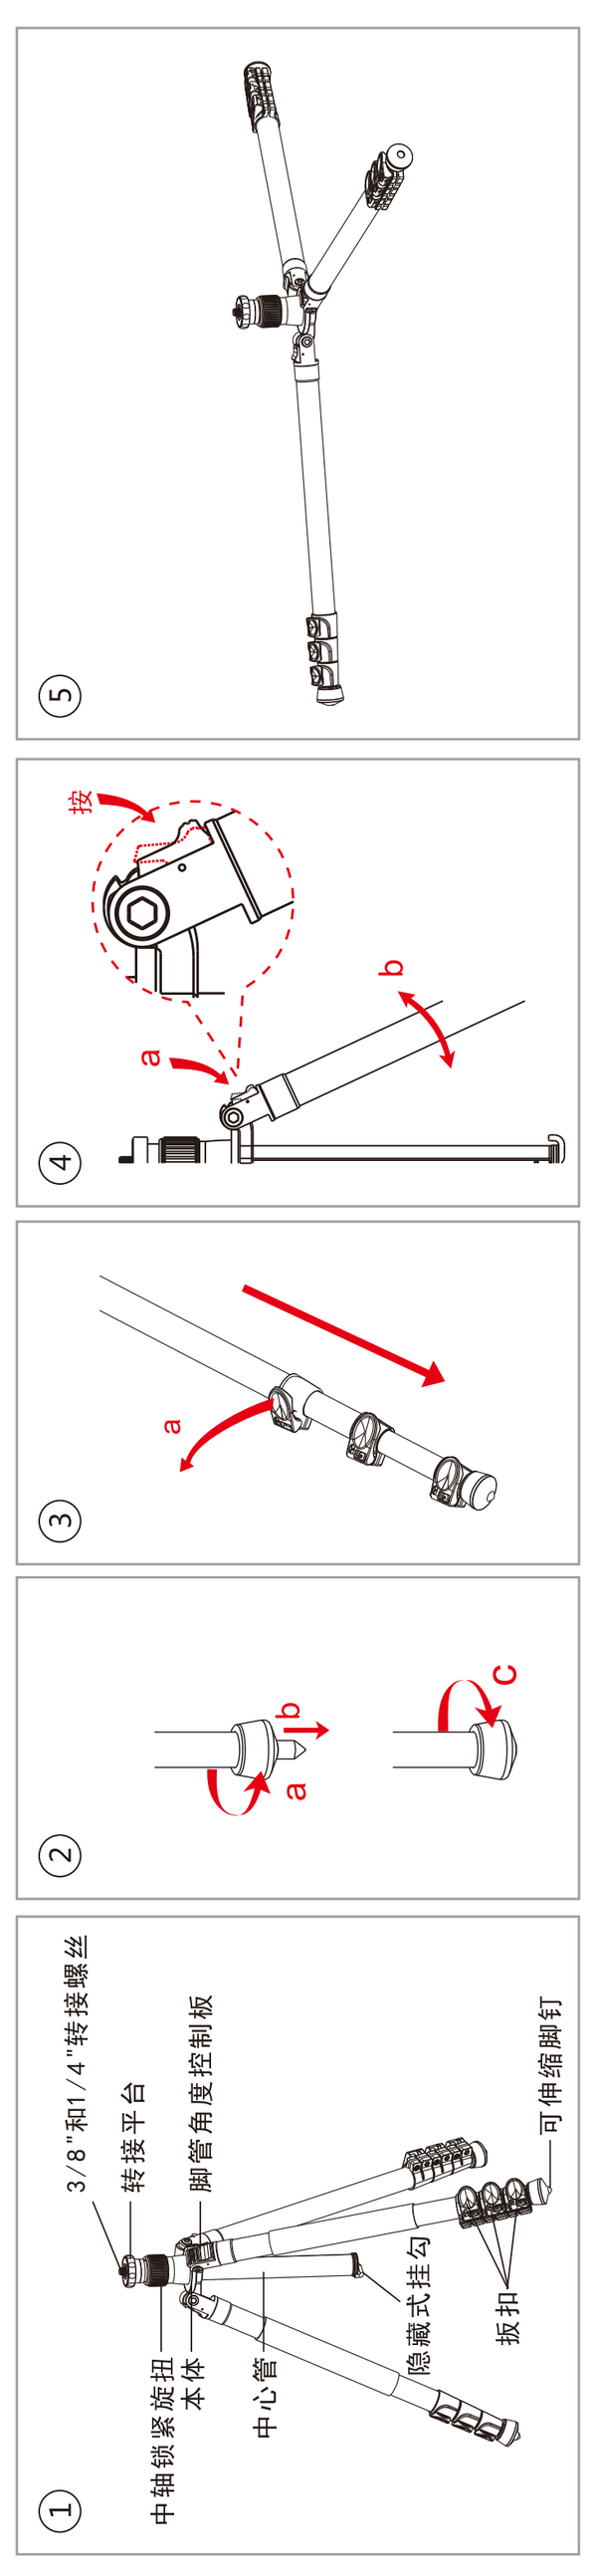

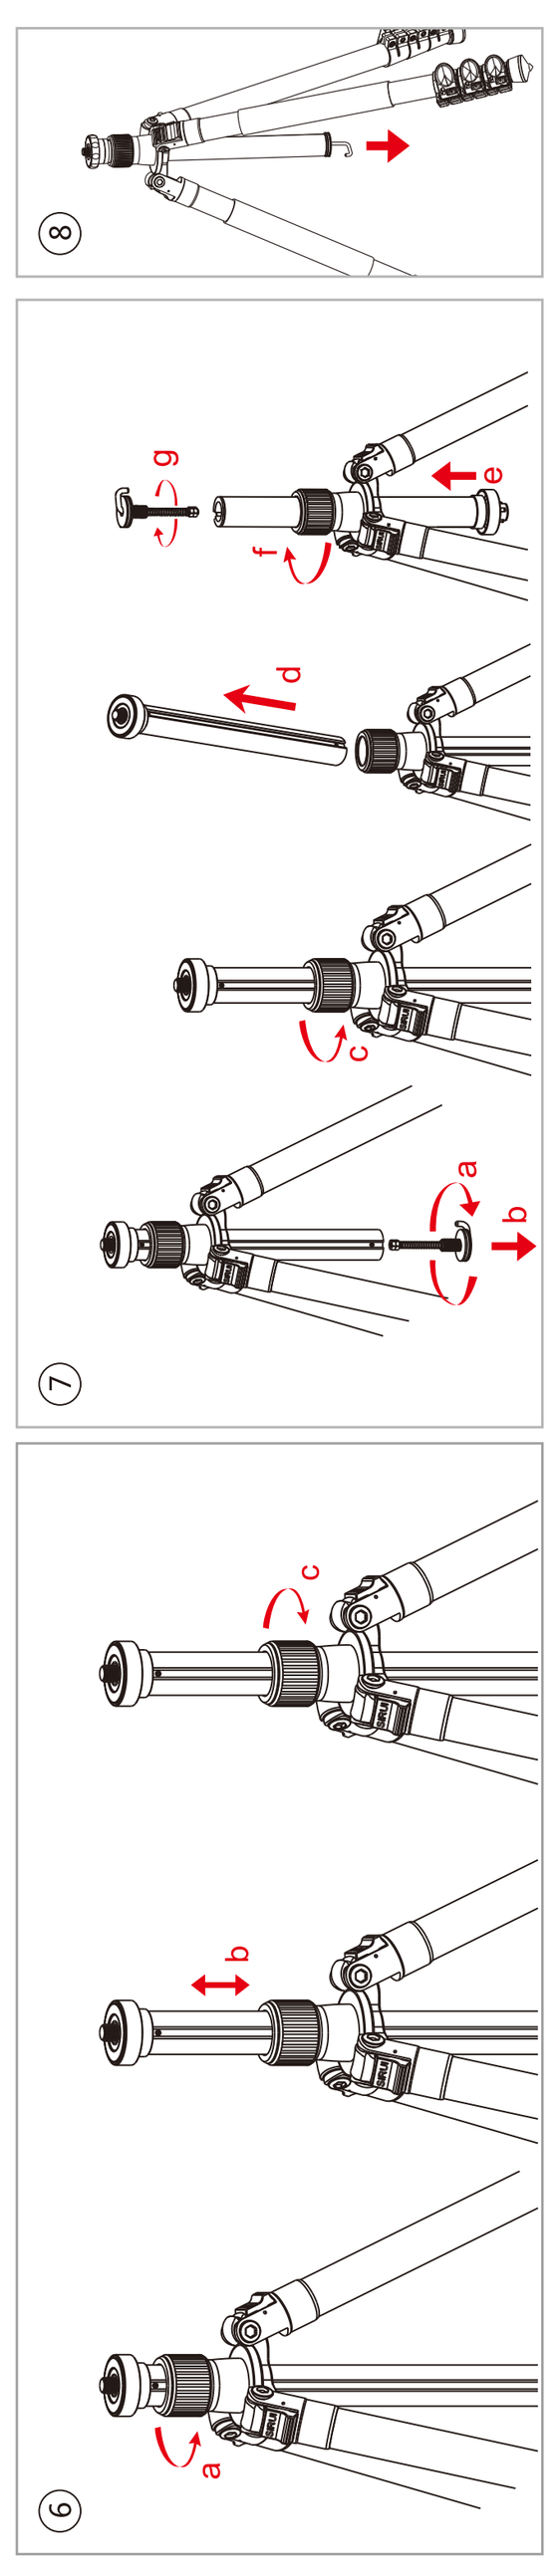

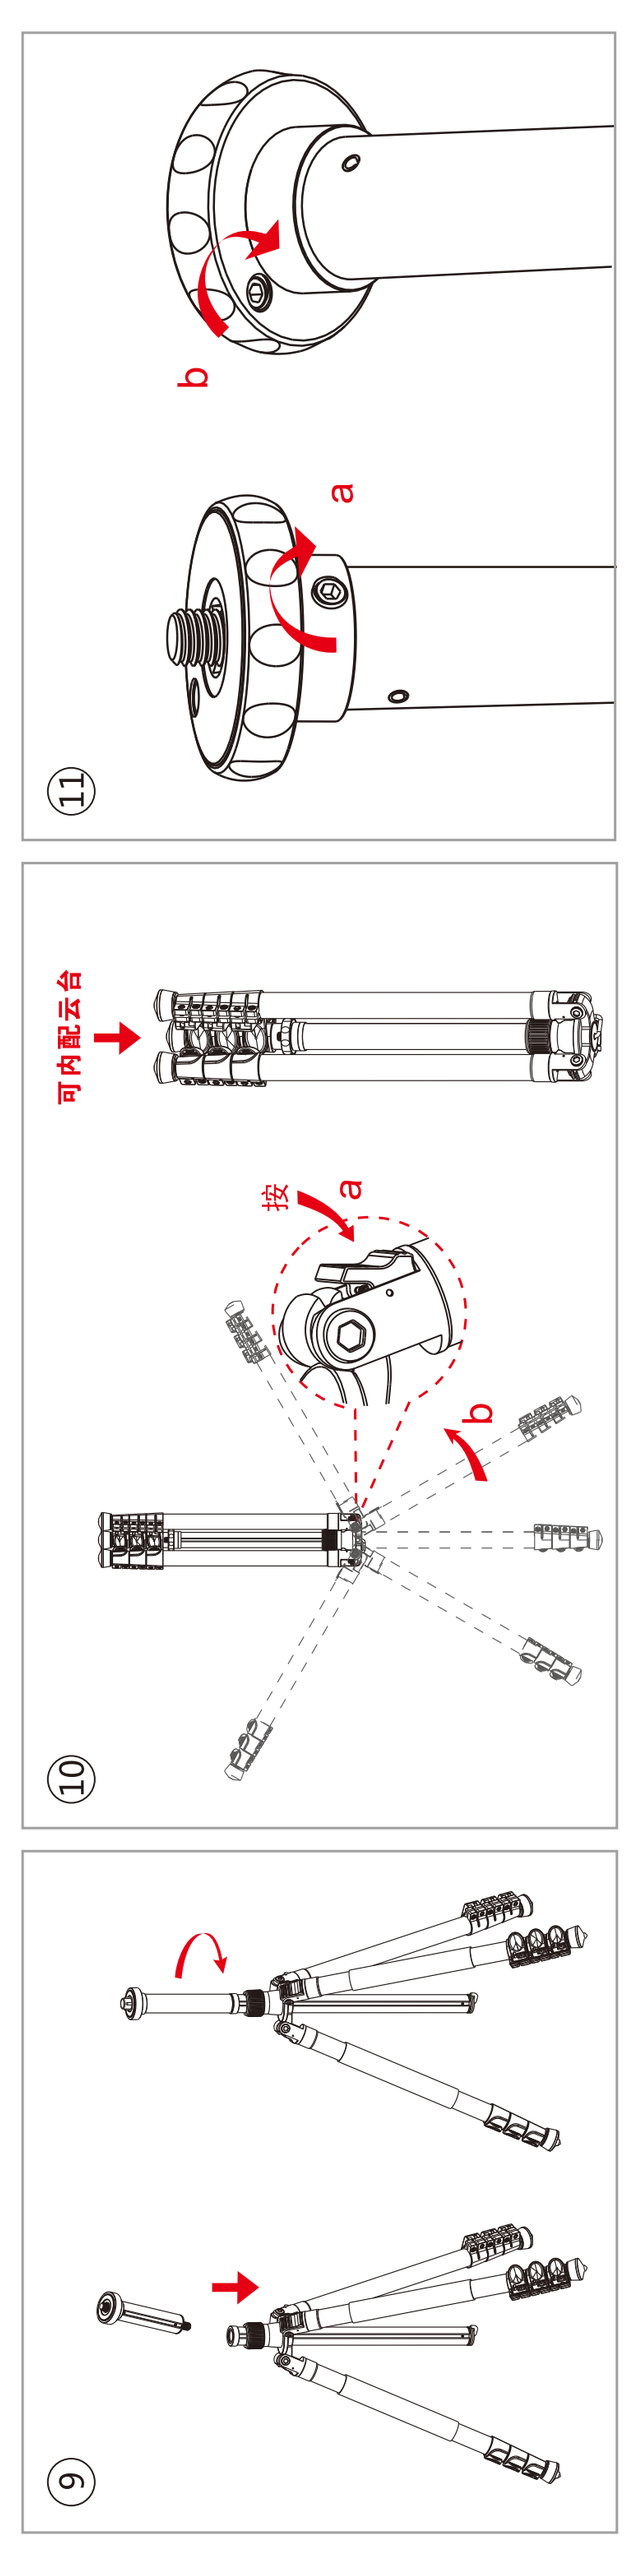

1. 认识三脚架

2. 可伸缩脚钉
如图a方向旋转橡胶垫时可伸出不锈钢钉，c方向旋转可收回不锈钢钉藏于橡胶垫内。注：1系列（最大管径为25mm）三脚架配备的固定脚钉无此功能。

3. 伸延脚架管
按图中方向a，同时或者分别松开扳扣，然后将脚管拉出您所需要的长度，再按从大到小扣紧扳扣锁紧相应的脚管，收缩时松开扳扣应按从小到大的顺序。

4. 三脚架角度调节
该脚架的每只支撑脚均可调节三种支撑角度，以适应不同的拍摄要求，如图所示方向a，压下角度控制按钮不放，同时扳动脚管至相应的角度，放开角度控制按钮后，再将支撑脚按图示方向b轻轻拉紧即可。

5. 微距拍摄
把三脚架打开至最大档位，用配送的短中轴更换原来的长中轴，即可实现低角度微距拍摄。

6. 中心管升降调节

7. 中轴倒置
把中轴底部的挂钩拆下，松开中轴调节旋钮。把中轴向上抽出，再把中轴从底下插入，旋紧中轴调节旋钮和挂钩。

8. 挂钩
挂钩可以承受一些物品如相机包、水袋等，既方便随身物品的放置，又可以增加脚架的稳定度。

9. 短中轴加长
把图所示的短中轴旋紧到脚架的长中轴上，即可实现中轴加长功能。

10. 脚架折叠
将所有脚管全部缩回并锁紧后，如图所示方向a压下角度调节按钮不放，同时按图示方向b，分别扳动相应支撑脚至对面即可实现脚架折叠，使您的脚架达到最小尺寸，便于携带。

11. 紧定螺丝的使用
按a方向拧紧图示紧定螺丝，可防止转接平台松动，装上云台后按b方向拧紧图示紧定螺丝，可以防止云台松动。

注意事项：
- 不要超过最大的制定负重（请参考个别产品说明）。
- 当使用产品时，时常紧锁其安全装置。
- 切勿在温度低于零下40摄氏度及高于100摄氏度使用。当在潮湿/沙地/布满尘埃的环境下使用后，谨记将产品弄干及清洁，不建议在海水中使用。
- 切勿将产品长时间放在太阳下曝晒及避免高温环境，例如长时间放在车厢内或玻璃后。
- 在公众地方使用时，如在没有人照料下，切勿留下设备而引致其他公众不便。
- 建议在运输过程中，将设备（例如相机）从脚架上移除。
- 使用温和清洁剂及柔软毛巾清洁，将尘埃及沙粒从所有锁制及活动部件清除。
- 除非有需要，此设备无需定期加添润滑油，如确实需要时，请使用标准润滑油或油蜡。
- 为自身安全着想，切勿将产品接触任何电源。

温馨提醒
在使用脚架拍摄且需要移动位置时，请将相机从三脚架上取下，切勿将相机装在脚架上一起移动，剧烈的晃动（特别是安装了长焦镜头的相机）可能会使转接螺丝断裂，进而损坏相机。
伸展脚管时，请从最大管径的脚管到最小管径的脚管的顺序伸展。收纳脚管时，请从最小管径的脚管到最大管径的脚管的顺序收纳。

思锐公司保留产品升级和由于产品升级而变更各参数的权利，请以实物为准，恕不另行通知。印刷品上如有印刷错误或语词方面的错漏如造成不便，敬请包涵。

保修卡

尊敬的顾客：
感谢您购买思锐的产品！在正常使用过程中，如果因器材本身的材料及工艺出现质量问题，思锐将会提供免费的保修服务。在需要保修服务时，请提供本保修卡和购买凭证（收据或发票，须有商家盖章）。
思锐公司售后服务热线：400 830 2299
投诉电话：18165639388 (仅限工作日 8:15~12:15,14:00~18:00)

产品名称	保修期限
脚 架	6 年
云 台	
防潮柜本体	
电子部分	3 年

产品型号：_ _ _ _ _ _ _ _　购买日期：_ _ _ _ _ _
商店名称：_ _ _ _ _ _ _ _　商店电话：_ _ _ _ _ _
商店地址：_ _ _ _ _ _ _ _ _ _ _ _ _ _
商店盖章：_ _ _ _ _ _ _ _ _ _ _ _ _ _

顾客须知：
⑴ 思锐产品，享受6年免费保修（电子部分为3年），保修时间从购买之日算起。
⑵ 所保修产品，必须是在思锐正式授权的经销商或电子商务处所购买。
⑶ 需寄回思锐工厂维修的，请先拨打思锐服务电话，待确认故障后，思锐公司承担来回运费。一般性故障可在7个工作日内完成维修并寄回。
⑷ 防潮柜的保修：请先确定发生问题的部件，把该部件卸下单独寄回思锐工厂维修即可。具体可参照使用说明书或致电服务热线。
⑸ 以下情况不在保修范围：
① 超过保修期限的；
② 在非思锐正式授权经销商处购买的；
③ 在未被思锐授权的代理商或维修中心维修过的；
④ 由于不正当操作、意外事件、自然灾害导致的故障或损伤。

※ 本保修卡只限在中国大陆使用

维修登记表A

用户姓名	
用户电话	
用户地址	
邮 编	
故障维修描述	
维修人员签名	
维修时间	

维修登记表B

用户姓名	
用户电话	
用户地址	
邮 编	
故障维修描述	
维修人员签名	
维修时间	

折叠方法：

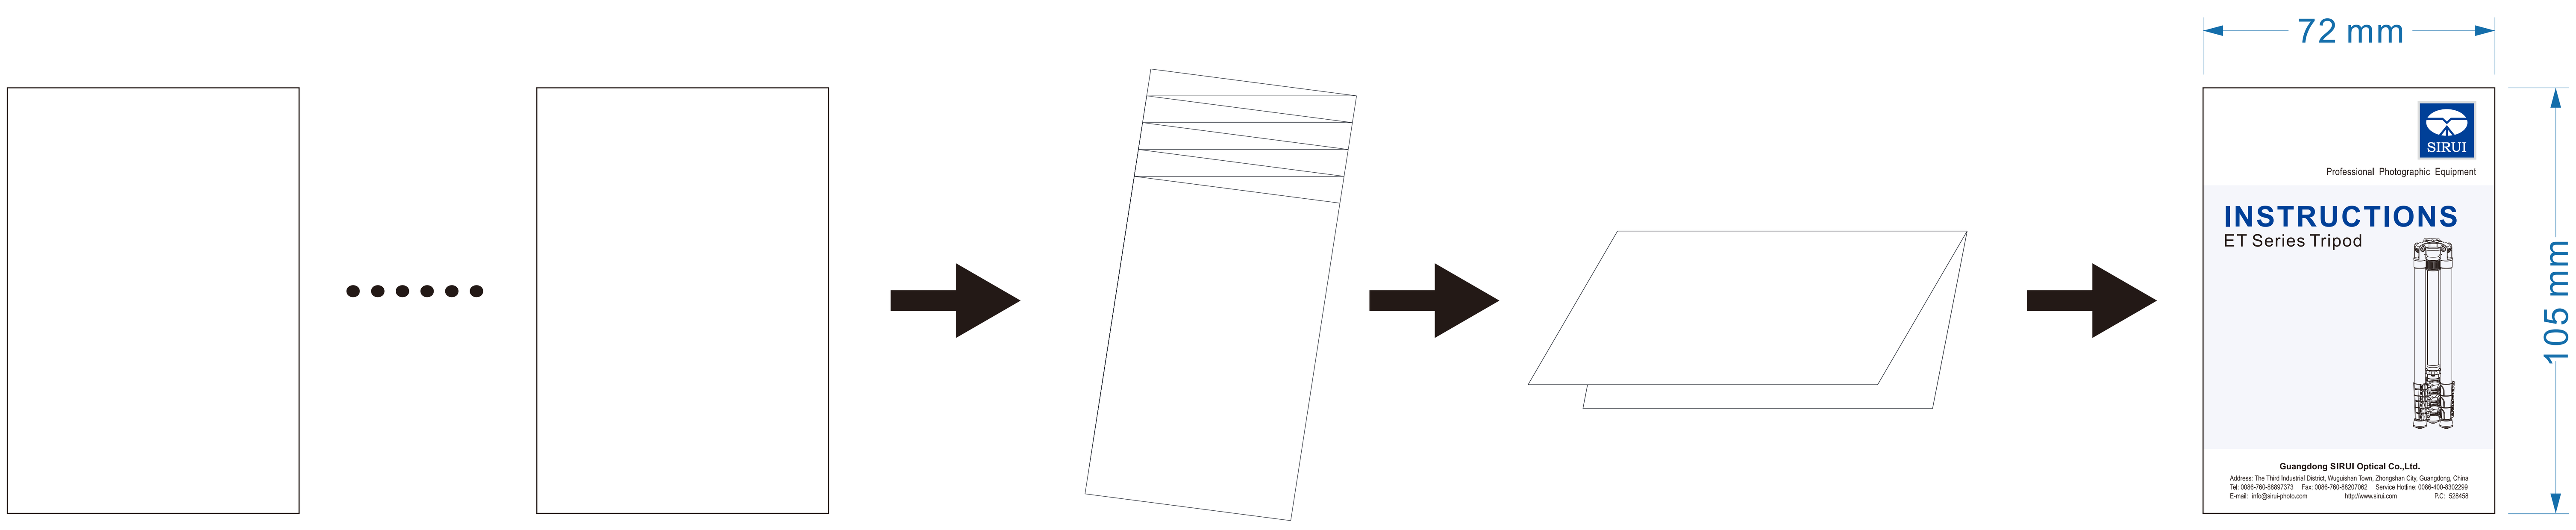

成型尺寸

包装工程师：彭少章　　翻译：　　审核：　　批准：