

物料名称：SL-100中轴说明书


物料编号：SL-P001

材质:100g双胶/CMYK

展开尺寸:360x210mm

成型尺寸:72x105mm


说明书正面 (英文)



SIRUI, Capturing Your Imagination!

Instructions

SL-100 Center Column



GUANGDONG SIRUI OPTICAL CO.,LTD.

Add: The Third Industrial District, Wuguoshan Town, Zhongshan City, Guangdong, China (Zip Code: 528458)

Tel: 86-760-88897373 Fax: 86-760-88207062

E-mail: info@sirui-photo.com Website: www.sirui.com

SL-100 Center Column Data Chart

Max. Load	kg/lb	12/26.46
Max. Height	mm/inch	013/0.29
Max. Weight	mm/inch	310/12.2
Max. Length	mm/inch	190/7.5
Max. Width	mm/inch	190/7.5
Max. Depth	mm/inch	22/0.87
Max. Thickness	mm/inch	2

SL-100

1. Know the Product

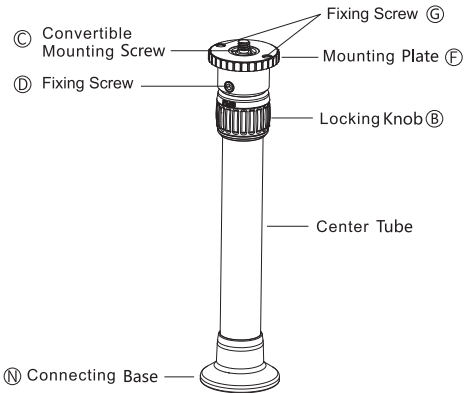


Fig.1

2. Switch Mounting Screw from 3/8" to 1/4"

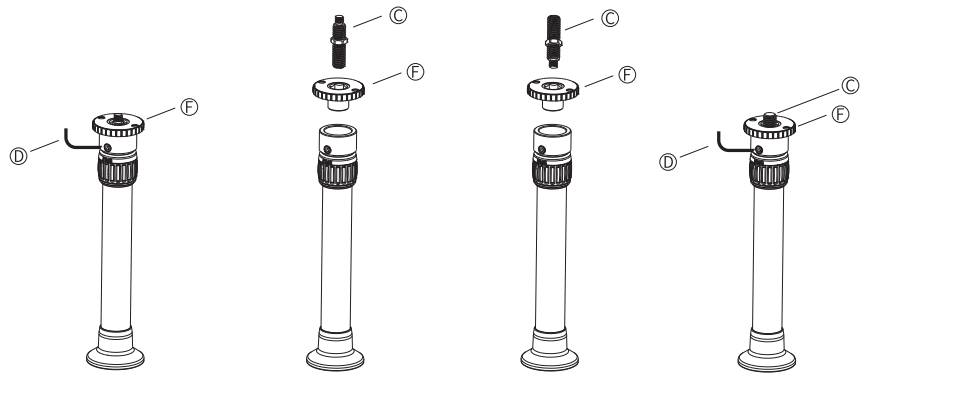


Fig.2

3. Tripod Leg Extension and Retraction

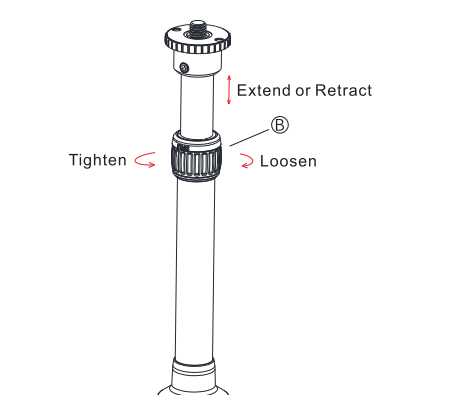


Fig.3

Attention:


- Do not exceed the recommended load limit of the tripod / ball head / center column. (Please refer to product specifications).
- Please make sure that the locks are securely tightened when in use.
- This product should not be used in environments that exceed the following conditions (+40 ~ +100°C/40 ~ +212°F). And, when used in damp, dry or dusty environments, please clean and dry thoroughly after use, to assure proper functioning in the future. It is not recommended to expose this product to saltwater. If exposed, please clean with mild soap and warm water and towel dry.
- Please keep from high temperatures and direct exposure to bright sunlight for extended periods of time.
- Please do not leave the equipment alone in a public place, which can be an inconvenience or hazard to others.
- To protect your camera gear, please remove it from the tripod / ball head / center column when transporting from place to place.
- Please use a soft towel with warm water and mild soap to clean the locking system and gliding parts when necessary. Towel dry before storing the product.
- Under most situations, there is no need to lubricate any parts of this product. The addition of most lubricants will gum up the mechanisms and reduce their normal gliding characteristics. Please call or email us if you have any questions or special needs.
- Please keep this product away from all electrical power sources.

CAUTION

Please remove the camera from the tripod when changing the position of the tripod. Do not place the tripod, with camera attached, over your shoulder or carry the tripod horizontally by the legs. Strong shaking may cause damage of the screw in the mounting plate and/or the camera. Please extend the center column from big section to small section, close the center column from small section to big section.


Specifications are subject to change without notice.

Products Info




Official Website

News and Tutorials



YouTube

Services



Facebook

WARRANTY CARD INFORMATION

Dear SIRUI Customer,

Thank you for your purchase of SIRUI Professional Products! SIRUI warrants that your purchase is free from defects in materials and workmanship under normal use during the Limited Warranty Period. The Warranty begins on the original date of purchase on your sales receipt and is not transferable. If service is required, a copy of the sales receipt must be included with an explanation of the problem.

Product	Warranty Length
Tripods / Monopods / Accessories	6 years
Humidity Control Cabinet (Cabinet)	3 years
Humidity Control Cabinet (Electronics)	3 years

Model: _____ Date: _____

Store: _____ Serial Number: _____

Warranty coverage can differ from region to region. Please see the contact information below for product registration, information and service for the region the product was purchased in.

SIRUI 6 (six) Year Limited Warranty (3 Year Warranty for Electronic Parts). This warranty shall be limited to repair, adjustment and/or replacement at SIRUI or its authorized distributors option, of defective parts, free of charge (except the cost of transportation to the distributor/service center). Responsibility is limited to the actual cost of the item. Call or Email with questions and service before sending any product to the center in your region. Below is a listing of contact information for Product Registration, Service Inquiries and Questions. SIRUI will not be responsible for expenses or inconveniences, or consequential damages to equipment, or by breach of any expressed or implied warranties.

Limitations:
Warranty is not transferable.
This warranty covers all defects encountered in normal use of the equipment and does not apply in the following cases:
1. If the equipment has been serviced by other than an authorized SIRUI Service Center.
2. Damage to the equipment is due to modification (including but not limited to, the removal of ballhead clamps), overloading, mishandling, abuse, accident, sand, corrosives, water damage or not following operating instructions.
3. No valid proof of purchase is provided.
4. Damage caused by acts of nature (including, but not limited to fires, floods or earthquakes).

Warranty coverage can differ from region to region. Please see contact information below for product registration, information and service for the region the product was purchased in.


Warranty Address and Contact Information:
(Please contact the seller or the local distributor where the product was purchased for warranty issues or questions and before any product is sent.)

1. Guangdong SIRUI Optical Co., Ltd.
The Third Industrial District, WuguoshanTown, ZhongshanCity, Guangdong, China
Tel:0086-760-88897373 Fax:0086-760-88207062
Http://www.sirui.com E-mail: info@sirui-photo.com
Service Hotline: 0086-400 830 2299
Complaint Hotline: +86-181 6563 9388
(Monday to Friday: 9:15am-12:15pm, 14:00pm-18:00pm)

2. SIRUI USA, LLC
Add: 29 Commerce Court Verona, NJ 07044
www.sirui.com
Service: Toll Free 866-373-0829 E-mail: info@sirui.com
FOR PRODUCTS PURCHASED IN THE USA PLEASE SEE:
For full details on USA Warranty Terms and Limitations:
https://www.siruiusa.com/warranty.html
To register products: https://www.siruiusa.com/product-registration.html

3. European Service Center
Add: SIRUI Optical GmbH • Ernst-Augustin-Str.1a • 12489 Berlin • Germany
Phone: +49 30 991 94 00 • Email: info@siruioptical.eu


说明书背面 (中文)



影像随心 思锐随行

使用说明

SL-100中轴



广东思锐光学股份有限公司

地址：广东省中山市五峰山第三工业区 邮编：528458

电话：0760-88897373 传真：0760-88207062 服务热线：400 830 2299

邮箱：info@sirui-photo.com 网址：www.sirui.com

投诉电话：18165639388

(收藏工作日 8:15-12:15, 14:00-18:00)

SL-100中轴参数

最大承重	kg	12
自重重量	kg	0.13
最大高度	mm	310
最小高度	mm	190
最大直径	mm	19
最小直径	mm	22
节数		2

SL-100

1.认识产品

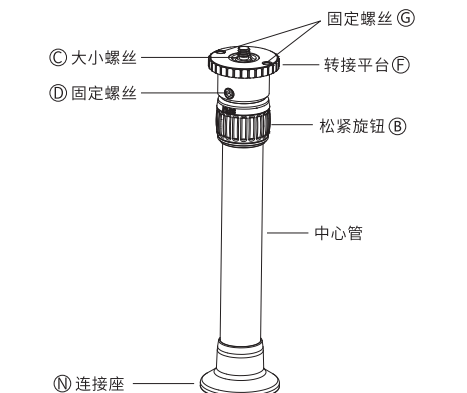


图1

2. 相机平台大小螺丝3/8转1/4

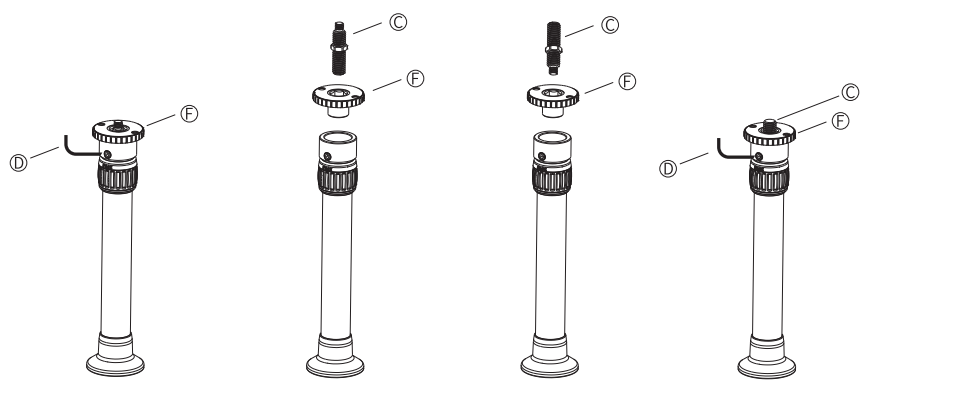


图2

3. 三脚架脚管伸缩

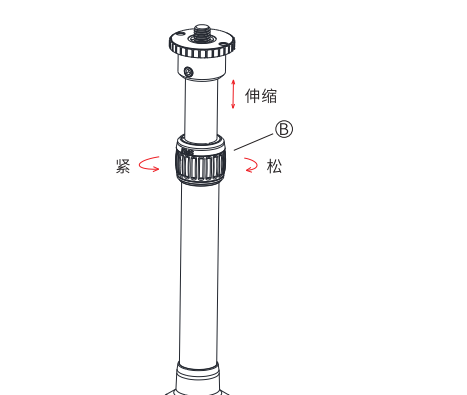


图3

注意事项:

- 不要超过最大的制定负重（请参考个别产品说明）。
- 当使用产品时，时常紧锁其安全装置。
- 切勿在温度低于零下40摄氏度及高于100摄氏度使用。当在潮湿/沙地/布满尘埃的环境下使用后，谨记将产品弄干及清洁，不建议在海水中使用。
- 切勿将产品长时间放在太阳下曝晒及避免高温环境，例如长时间放在车厢内或玻璃后。
- 在公众地方使用时，如在没有人照料下，切勿留下设备而引致其他公众不便。
- 建议在运输过程中，将设备（例如相机）从脚架上移除。
- 使用温和清洁剂及柔软毛巾清洁，将尘埃及沙粒从所有镜架及活动部件清除。
- 除非有需要，此设备无需定期加添润滑油，如确实需要时，请使用标准润滑油或油蜡。
- 为自身安全着想，切勿将产品接触任何电源。


温馨提醒

在使用脚架拍摄且需要移动位置时，请将相机从三脚架上取下，切勿将相机或三脚架一起移动。剧烈的晃动（特别是安装了长焦镜头的相机）可能会使转接螺丝断裂，进而损坏相机。

伸展中心管时，请从最大直径的中心管到最小直径的中心管的顺序伸展。收缩中心管时，请从最小直径的中心管到最大直径的中心管的顺序收缩。


思锐公司保留产品升级和由于产品升级而变更各参数的权利，请以实物为准。恕不另行通知。印刷品上如有印刷错误或语言方面的错漏如造成不便，敬请包涵。

更多服务




企业微信

资讯与教程



微信公众号

更多产品



官方网站

保修卡

尊敬的顾客：

感谢您购买思锐的产品！在正常使用过程中，如果因器材本身的材料及工艺出现质量问题，思锐将会提供免费的保修服务。在需要保修服务时，请提供本保修卡和购买凭证（收据或发票，须有商家盖章）。

思锐公司售后服务热线：400 830 2299

产品名称	保修期限
脚架	6 年
云台	
防潮柜本体	
电子部分	3 年

产品型号：_____ 购买日期：_____

商店名称：_____ 商店电话：_____

商店地址：_____

商店盖章：_____

顾客须知：

- ① 思锐产品，享受6年免费保修（电子部分为3年），保修时间从购买之日起算。
- ② 所保修产品，必须是在思锐正规授权的经销商或电子商务处购买。
- ③ 需寄回思锐工厂维修的，请先拨打思锐服务电话，待确认故障后，思锐公司承诺将运费（一次性运费）在7个工作日内完成维修并寄回。
- ④ 所保修的保修，请电话认定无问题的保修，把故障件卸下单独寄回思锐工厂维修即可。具体可参照使用说明书或致电服务热线。
- ⑤ 以下情况不在保修范围：
 - ① 超过保修期限的；
 - ② 在非正规正式授权经销商处购买的；
 - ③ 在未获思锐授权的代理商或维修中心维修过的；
 - ④ 由于不正当操作、意外事件、自然灾害导致的故障或损坏。

※ 本保修卡只限在中国大陆使用


维修登记表A

用户姓名	
用户电话	
用户地址	
邮 编	
故障维修描述	
维修人员签名	
维修时间	

维修登记表B

用户姓名	
用户电话	
用户地址	
邮 编	
故障维修描述	
维修人员签名	
维修时间	

说明书折叠方法:

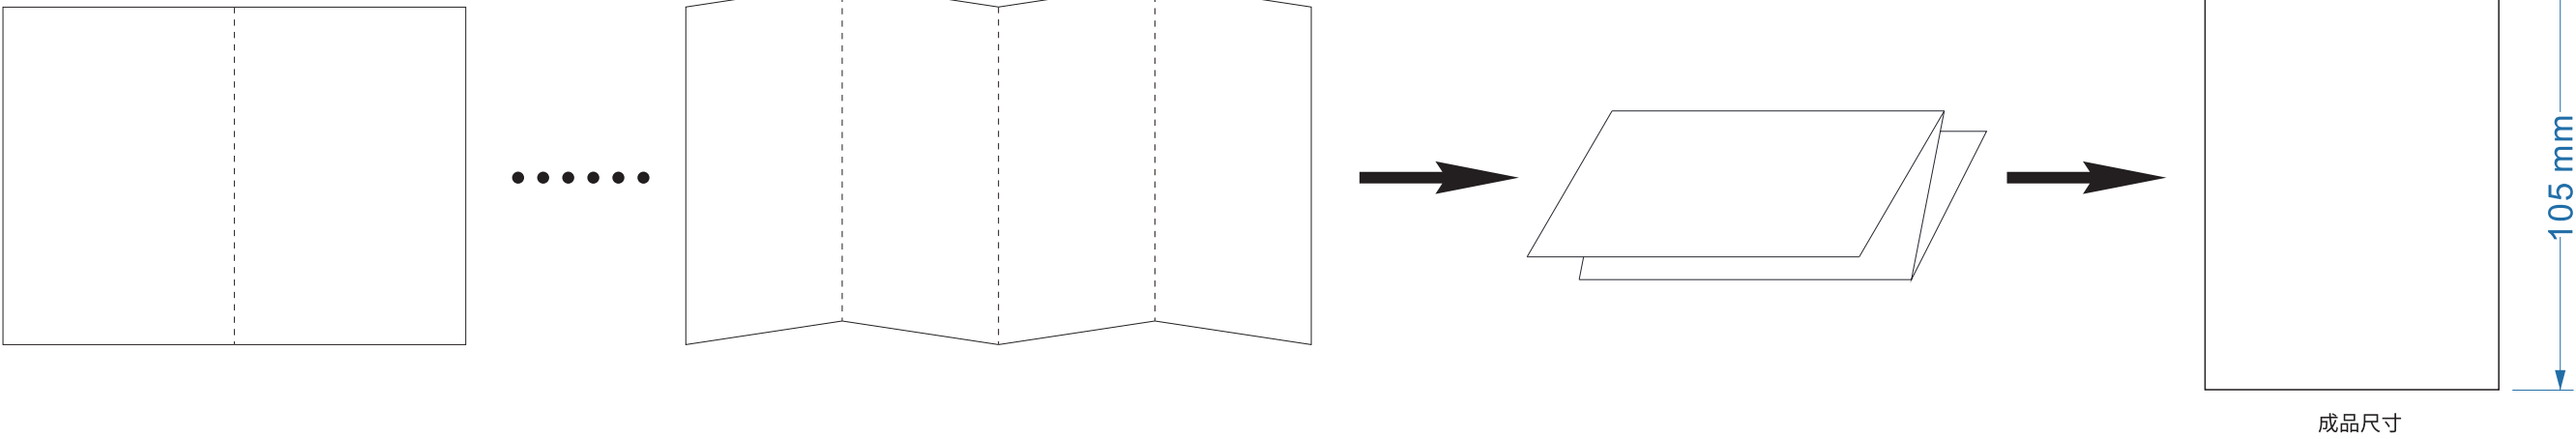

包装工程师: 谢亮

翻译:

审核:

批准: