


A&D BM-Series

MICRO & SEMI-MICRO BALANCES with Internal Self-Calibration and Fanless Static Elimination Chamber

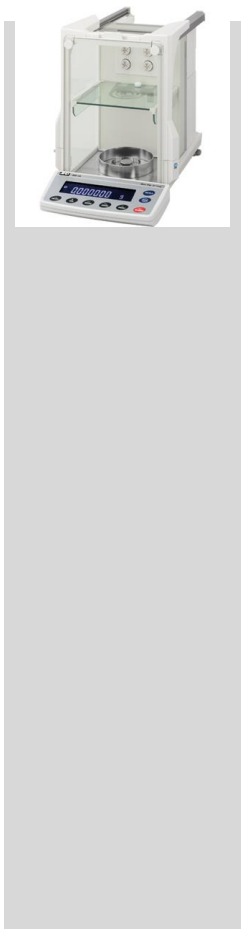

- Instant and smooth static elimination using a built-in fanless ionizer to ensure stable weighing
- Large working space for better operability and a wider range of applications
- Interlockable sliding doors allowing efficient operation with both hands
- Anti-static glass breeze break with a thin evaporated metal coating
- Adjustable (manual or automatic) response characteristics to help cope with the effect of drafts and vibrations
- Automatic self-calibration to maintain accuracy under temperature changes
- Embedded temperature, humidity and atmospheric pressure sensors
- Multiple weighing units: g, mg, oz, ozt, ct, mom, dwt, grain, specific gravity (either tael or tola can be added upon request)
- Comes equipped with the handy AD-1688 weighing data logger
- Clearly visible, reverse-backlit LCD
- GLP/GMP/GCP/ISO compliant output
- Clock and calendar function
- Data memory function
- RS-232C and Quick USB interfaces as standard
- Counting mode with the Automatic Counting Accuracy Improvement (ACAI) function
- Percent mode function
- Comparator function with buzzer
- Auto power on function
- Underhook function
- Special pans/holder (BM-20/22)
- Density determination function and an optional density determination kit (for BM-252/200/300/500 only)
- Optional pipette accuracy testing kit
- Windows Communication Tools software (WinCT) on CD-ROM

Models

BM-20	22g X 0.001 mg - Pan Size: 25mm dia. (50mm, 95mm for weighing filters)
BM-22	5.1g / 22g X 0.001 mg / 0.01 mg - Pan Size: 25mm dia. (50mm, 95mm for weighing filters)
BM-252	250g X 0.01 mg - Pan Size: 25mm dia. (50mm, 95mm for weighing filters)
BM-200	220g X 0.1 mg - Pan Size: 25mm dia. (50mm, 95mm for weighing filters)
BM-300	320g X 0.1 mg - Pan Size: 25mm dia. (50mm, 95mm for weighing filters)
BM-500	520g X 0.1 mg - Pan Size: 25mm dia. (50mm, 95mm for weighing filters)

Options

BM-08	Ethernet interface
BM-014	Pipette accuracy tester option
BM-025	Foot switch

Accessories

AX-BM-031	Display covers (5 pcs)
AX-BM-032	Microfuge tube holder (for BM-20/22 only)
AX-ROUND-PAN-L	Round aluminum analytical pans (ϕ 15 mm, 0.8 ml, 100 pcs)
AX-ROUND-PAN-M	Round aluminum analytical pans (ϕ 12 mm, 0.3 ml, 100 pcs)
AX-ROUND-PAN-S	Round aluminum analytical pans (ϕ 8 mm, 0.05 ml, 100 pcs)
AD-1671	Anti-vibration table for Micro-Balances (replaces AD-1670)
AD-1672	Table top breeze break
AD-1682	Rechargeable battery unit
AD-1682	Rechargeable battery unit
AD-1683	Static eliminator
AD-1684	Electrostatic field meter
AD-1687	Weighing environment logger
AD-1688	Weighing data logger
AD-1689	Tweezers for calibration weight
AD-8118C	Universal printer
AD-8121B	Compact printer
AD-8526	Serial/Ethernet converter
AD-8527	Quick USB adapter
AD-8920A	Remote display
AD-8922A	Remote controller
AX-USB-9P	Serial/USB converter
AX-SW128	Foot switch
AX-T-314A-S	External key plug