

# **DEU1016 Disk Enclosure**

### **Overview**

DEU1016, with high performance, high reliability, high density, high scalability, is anaffordable high-leveldisk enclosure developed especially for video surveillance.



**DEU1016** 

### **Features**

High density

The innovative enclosure with 530.4mm depth and 3U height that holds up to 8 disks, is space-saving and applicable to the standard rack-mounted scenarios.

Power protection

Disk poweredonsequentially during system startup, protection from impulse current.

Multistagefan speed and energy saving

Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.

Redundant power supplies





# **Specifications**

|   | DEU1016   |  |
|---|---|--|
| Storage   |   |  |
| HDD   | 16 SATA Interfaces  |  |
| Disk Capacity   | up to 6TB for each disk   |  |
| External Interface  |   |  |
| Back-end Expansion<br>Interface                                     | 1 Mini SAS  |  |
| General   |   |  |
| Power Supply  | 100 ~ 240V  |  |
| Working Environment   | Vorking Environment -10 °C~ 55 °C<br>5%~95% RH (non-condensing) |  |
| Weight(Without HDD)   | Vithout HDD) < 10kg(22lb)                                       |  |
| Dimensions (H×W×D) 452.1 × 481.46× 130.5mm (17.8" × 18.96" × 5.14") |   |  |




## **Dimensions**

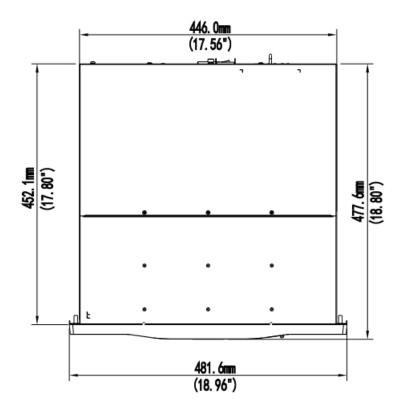





### **Rear Panel**

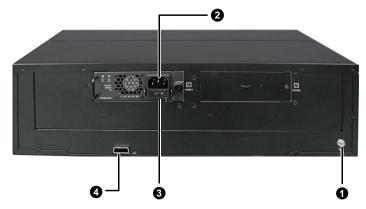

| No. | Item               | Description                                |
|-----|--------------------|--|
| 0   | Grounding terminal | Equipment grounding                        |
| 2   | Power interface    | AC power, 100 V-240 V AC                   |
| 8   | Power switch       | Turn on/off device when connected to power |
| 4   | Mini-SAS interface | For connection to the host                 |

#### Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseas business@uniview.com; global support@uniview.com

http://sgcdn.uniview.com

©2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

<sup>\*</sup>Product specifications and availability are subject to change without notice.