


ARLSWP-26N

Surface mount non-Illuminated, water proof, and push button switch on IP67 surface mount enclosure. The switch is covered with shroud to protect from all kinds of weather. (Please speak to our sales person for customization if required)

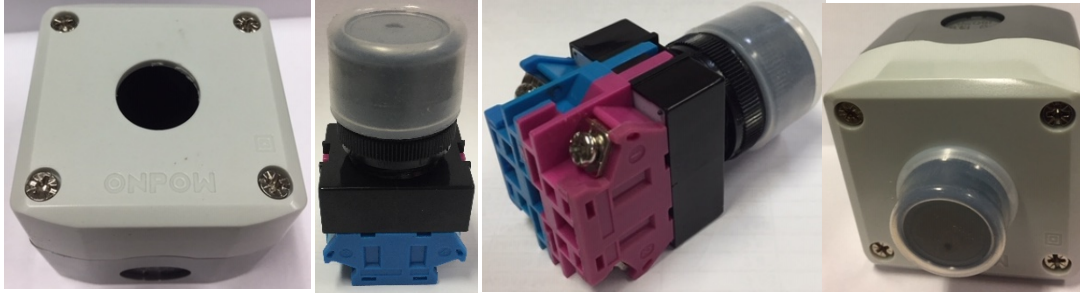

Specifications

Operating Temperature	- 25°C - +55°C (no freezing)	
Operating Humidity	45 - 85%RH (no condensation)	
Contact Material	- silver - silver alloy - gold-clad silver, cladding thickness is 3 μm	
Contact Resistance	≦ 50m Ω	
Insulation Resistance	≧ 100MΩ	
Dielectric Strength	3000 V, AC 50Hz	
Vibration Resistance	50Hz, Amplitude 1.0mm p-p	
Shock Resistance	≧ 10g	
Life	Mechanical	Momentary type: ≧ 1,000,000 times. Alternate type, selector type: ≧ 500,000 times. Key-lock type, emergency type: ≧ 200,000 times.
	Electrical	≧ 50,000 times
Terminal	Thread connection, diameter of welded wire: 2 × 1.5mm max Connecting link: 6.3 × 0.8mm	
Operation	Operating Force: 800gf~2200gf (according to the quantity of switch units) Operating Travel: About 5.5mm (Pushbuttons)	

