

## ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington

# MODELS: MBF8022GR

# Top Mount Reach-In 1 Section Refrigerator Top Door Bottom Drawers

#### Standard Features

- Top mount compressor with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- · Electronic temperature controller
- Maintains temperatures between 35°F 38°F
- LED interior light
- Recessed door handle
- · Door lock standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three (3) pre-installed shelves per section
- Drawers include 6" deep (12" x 20") pan
- Down duct refrigeration to ensure even distribution of air

# **Optional Accessories**

 Extra shelves – includes 4 shelf clips per shelf MBF8022GR shelf part #: W0402389



MBF8022GR

For the best results of food preservation we recommend setting your refrigerator between 35  $^{\circ}$ F to 38  $^{\circ}$ F

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.















# ATOSA USA, INC.


Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington


### **SPECIFICATIONS**

Models	Door	Drawer	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8022GR	1	2	21.4	2	4	2.1	115/60/1	1/7	R290	$28^{3/4} \times 31^{3/4} \times 81^{1/4}$	238	271

# **PLAN VIEW**

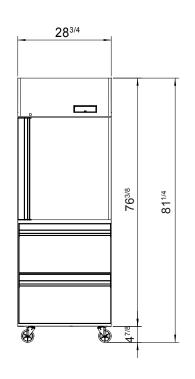

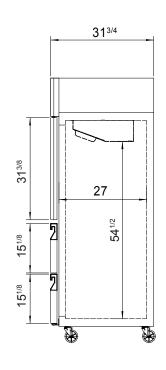





NEMA 5-15P

Door lock

Down duct

Temperature control



