



Made in Italy




Brema Ice Machines add a touch of elegance to your establishment. Known and trusted in the industry for high-quality construction and consistent production, they are the most reliable choice for all your ice production needs.

Ice Pebbles



Brema Pebble Ice Machines are preferred in bars, pubs, restaurants and night clubs for easy-melting ice. The combined action of an auger and extruder continuously produces ice for a consistent supply. The reliability of the inner working components ensures low operating costs and high efficiency ice production.



Approximate Size



Pebble Ice,
91% Dry

Standard Features



1L water = 1kg ice



AISI 304 Stainless steel evaporator



Air cooling system



Easy cleanable internal rounded surfaces



Dust-proof water basin



RoHS Free



Electromechanical operation



ON/OFF switch



Automatic water charge



HFC Free
HC R290 Refrigerant Gas



TB Series

Standard Features Included



Adjustable stainless steel feet



HCFC-Free insulated storage



Retractable insulated door



TB852A HC



TB1404A HC

Brema Ice Machine Cleaner

For use with Brema Ice Machines to completely descale and clean interior and exterior surfaces and components. Colorless and odorless, powdered agent. Sold separately.

TM Series

Standard Features Included



1 m³ = 550 kg of ice



Frame in INOX



TM140A HC




TM250A HC



BIN110

TB852A HC

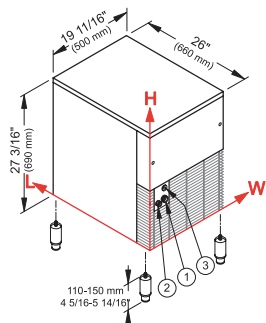


Adjustable feet 4 5/16" – 5 1/16"

- ① WATER IN: 3 14/16" – 6 4/16" – 3/4"
- ② WATER OUT: 1 14/16" – 5 15/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 3 7/16" – 9 1/16"

120V, 500W, 4A
—
216 lbs
207 lbs
44 lbs
26" x 19.5" x 27"
130 lbs
28.25" x 21.5" x 35"
148 lbs

Power
Compatible With
Production/24h*
Production/24h**
Bin Capacity
Dimensions (L x W x H)
Net weight
Ship Dim. (L x W x H)
Ship weight

TB1404A HC




Adjustable feet 4 5/16" – 5 1/16"

- ① WATER IN: 4 6/16" – 6 14/16" – 3/4"
- ② WATER OUT: 1 15/16" – 5 2/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 6 2/16" – 8 5/16"

115V, 680W, 6A
—
333 lbs
297 lbs
88 lbs
27.2" x 29.1" x 33.5"
130 lbs
29" x 30.75" x 40"
220 lbs

Power
Compatible With
Production/24h*
Production/24h**
Bin Capacity
Dimensions (L x W x H)
Net weight
Ship Dim. (L x W x H)
Ship weight

TM140A HC




- ① WATER IN: 3 3/16" – 4 12/16" – 3/4"
- ② WATER OUT: 18 14/16" – 2 9/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 2 11/16" – 11 7/16"

110V, 1000W, 9A
BIN110
304 lbs
287 lbs
—
22.5" x 22" x 23.5"
139 lbs
26.25" x 25.25" x 31.75"
163 lbs

Power
Compatible With
Production/24h*
Production/24h**
Bin Capacity
Dimensions (L x W x H)
Net weight
Ship Dim. (L x W x H)
Ship weight

TM250A HC



- ① WATER IN: 3 3/16" – 4 12/16" – 3/4"
- ② WATER OUT: 18 14/16" – 2 9/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 2 11/16" – 11 7/16"


115V, 1170W, 10A
BIN200
540 lbs
500 lbs
—
22.4" x 22" x 27.4"
183 lbs
25.4" x 25.4" x 35.8"
205 lbs

Power
Compatible With
Production/24h*
Production/24h**
Bin Capacity
Dimensions (L x W x H)
Net weight
Ship Dim. (L x W x H)
Ship weight

BIN110

Power
Compatible With
Production/24h*
Production/24h**
Bin Capacity
Dimensions (L x W x H)
Net weight
Ship Dim. (L x W x H)
Ship weight

—
TM140A HC
—
—
220 lbs
32" x 22" x 39.5"
117 lbs
34.5" x 24.5" x 46.25"
143 lbs

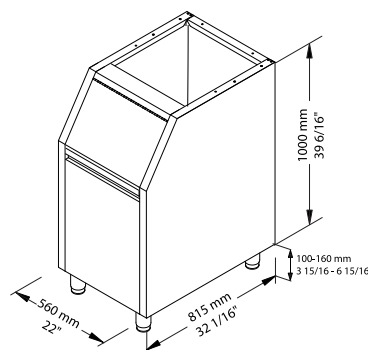

Adjustable feet 3 15/16" – 6 15/16"

*Ambient Temperature
21°C (70°F) / Water 10°C (50°F)
**Ambient Temperature
32°C (90°F) / Water 21°C (70°F)



Warranty
3 years parts & labor,
5 years on the compressor