












DELTA NG 120 R290 115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALCLIN OR SIMILAR) WITHOUT COOLING
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM TO 155MM



| |  24 H |  70°F/20°C |  50°F/10°C |  90°F/32°C |  70°F/21°C |  STOCK |  |  |  |
|--|--|---|---|---|---|--|--|---|--|
| | | lbs (Kg) | | lbs (Kg) | | lbs (Kg) | in (mm) | | |
| DELTA NG 120 A  | | 108 (49) | | 95 (43) | | 44 (20) | Width 18.31"(465) | Width 21.26"(540) | DELTA 40gr 1.57" (Ø) x 1.73" (H) 40 (Ø) x 44 mm (H) Average dimensions |
| DELTA NG 120 W  | | - (-) | | - (-) | | | Depth 23.43"(595) | Depth 25.98"(660) | |
| | | | | | | Height* 31.06"(789) | Height 36.22"(920) | | |

* WITH LEGS 35.20"/37.17"(894/944)

ACCESSORIES

INCLUDED



WATER OUTLET HOSE



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP

NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER



10" FILTER ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



PARTICLE FILTER




C4 WATER SOFTENER



SCALE KLEEN

TECHNICAL SCHEME

DELTA NG 120

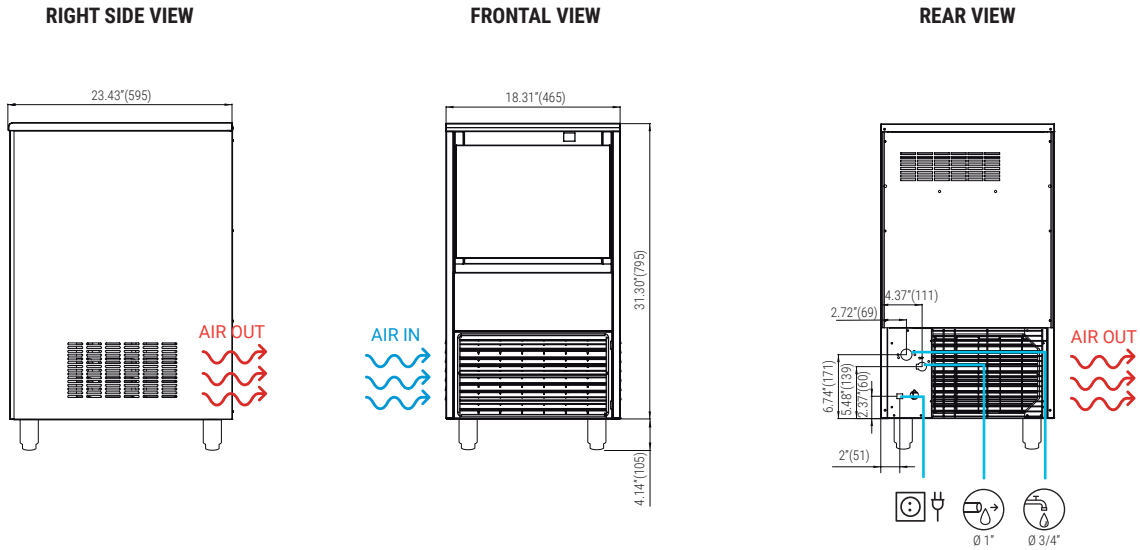

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V
41°F/109°F
41°F/95°F
14.5 psi (1 bar) / 87 psi (6 bar)
24 Ice cubes/cycle

R290
V | Hz | pH
115 | 60 | 1N

| DELTA NG 120 AIR COOLED | | | | | | DELTA NG 120 WATER COOLED | | | | | |
|-------------------------|-----|-----|-----|-----|--|---------------------------|-----|-----|-----|-----|--|
| °F | 50° | 60° | 70° | 86° | | °F | 50° | 60° | 70° | 86° | |
| 10° | 10° | 15° | 21° | 30° | | 10° | 10° | 15° | 21° | 30° | |
| 50° | 108 | 106 | 101 | 95 | | 50° | - | - | - | - | |
| 68° | 108 | 104 | 99 | 93 | | 68° | - | - | - | - | |
| 90° | 101 | 97 | 95 | 90 | | 90° | - | - | - | - | |
| 109° | 93 | 86 | 82 | 75 | | 109° | - | - | - | - | |
| 43° | | | | | | 43° | | | | | |

| MODELS | ASHRAE CONDITIONS (BTU/h) | (W) | (W) 109°F | (AWG/mm ²) (n.) | FUSE | 100lbs 90°F / 70°F (Kwh/100 lbs) | gal 100lbs (l/h) | HEAT REJECTED (BTU/h) (W) | (lbs) | (lbs) |
|----------------|---------------------------|-------|-----------|-----------------------------|------|----------------------------------|------------------|---------------------------|-----------|--------|
| DELTA NG 120 A | 4,163 | 1,220 | 382 | 16/1.5 | 3 | 10 | 8.6 | 44.3 6.6 | 3,333 889 | 99 123 |
| DELTA NG 120 W | - | - | - | - | - | - | - | - | - | - |



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR
Read our warranty policy to know more about limitations and exclusions

