



Available in Black or White finish

## MODEL

KGL-CH-(36-48-60)-S

CASE HOLDS 36F TO 40F | FORCED AIR REFRIGERATION.  
FRONT LOADING | TEMPERED GLASS



Intertek



Intertek



AUTODESK<sup>®</sup>  
REVIT<sup>®</sup>


SELF CONTAINED	Model	Width (inches)	Capacity Cu.ft	Electrical			NEMA Plug	Weight lbs		Crate Size (inches)		
				Compressor		Total Amps		Net Weight	Ship Weight	L"	W"	H"
				H.P	Amps							
	KGL-CH-36	35,87	4,93	1/2	8,9	17	Hard-wired	375	452	41.37	41.14	54.92
	KGL-CH-48	48,66	6,89	3/4	16	24	Hard-wired	452	536	54.17	41.14	54.92
	KGL-CH-60	59,69	8,58	3/4	16	24	Hard-wired	496	585	65.19	41.14	54.92

## STANDARD FEATURES

- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- Wood laminate covered end panels
- LED lighting in canopy and under all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning
- Slide out condensing unit on self-contained units

## OPTIONAL FEATURES

- Stainless steel front panel
- Stainless steel base and / or interior
- Mirrored side glass
- Front panel bumper protector
- Acrylic product partitions
- Shelf price tag moldings
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

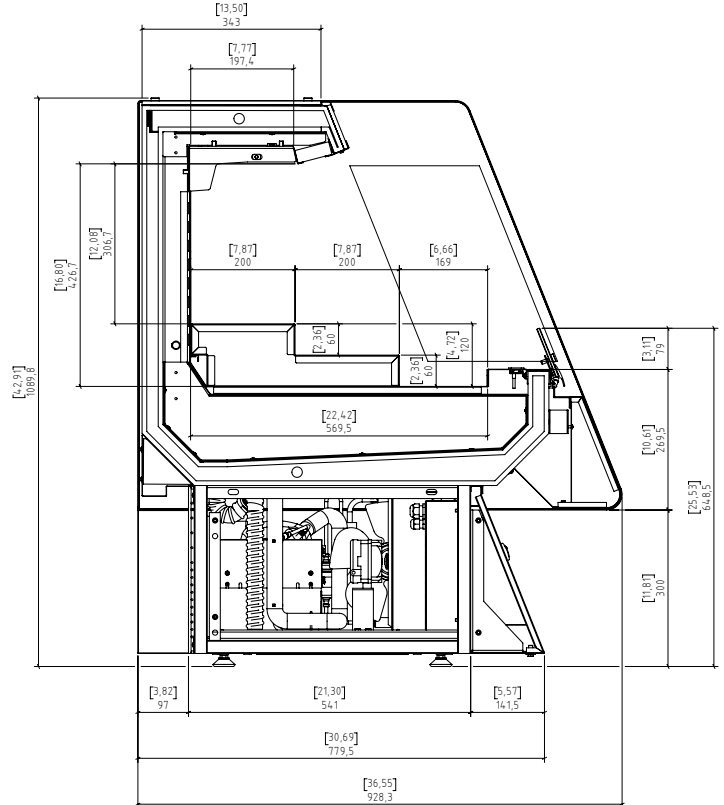

## NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient)

Hydra - Kool is a registered trademark of MVP Group Corp.  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters