

ROMA-115 ROTATING OVEN

Code:

- R-115

Baking Surface:

- Rotating

Fuel Options:

- R-115W-Wood
- R-115G-Gas
- R-115C-Combi

Overview

For the last fifty years, the timeless Roma style oven has been the most popular choice for pizza making in Italy. This oven provides the most finishing choices including painted stucco, mosaic tile or stone, complementing any door style.

Rotating ovens are ideal for fast-paced, high volume baking while still emphasizing production quality. It allows you to minimize the number of staff required, and maximize the use of your workspace.

Pizza Capacity

10"	12"	14"	16"	18"	20"
13	6	4	3	2	1

Standard Features

- Constructed with vibrated refractory stone
- Suitable for various foods: pizza, pita, bread, slow cooking meat & fish
- Heats up rapidly up to 950° Fahrenheit (510°C)
- Efficient temperature maintenance with no heat loss
- Heavy duty steel stand
- Rotating refractory stone baking surface
- Touch screen rotation controller, also controls gas on gas equipped ovens.

Certification

- ETL approved for Canada/USA

Warranty Information

- 4 Year deck and dome refractory stone warranty
- 1 Year parts and labour warranty



Images for demonstrative purposes only. Equipment shown may not be included in your custom quote. Consult quote for custom options.


Standard Finish

- Plain unfinished
- Additional colours or finishes are extra (see quote)

Customization Options

- Delivered assembled or assembled on site.
- Custom mosaic colour, pattern and branding
- Several door options, sizes and colours available ([See brochure](#))
- Granite mantle
- Left or right burner position (gas/combi ovens)
- Propane or Natural Gas (gas/combi ovens)
- Debris collector
- Oven tools


ROMA-115 ROTATING OVEN R-115

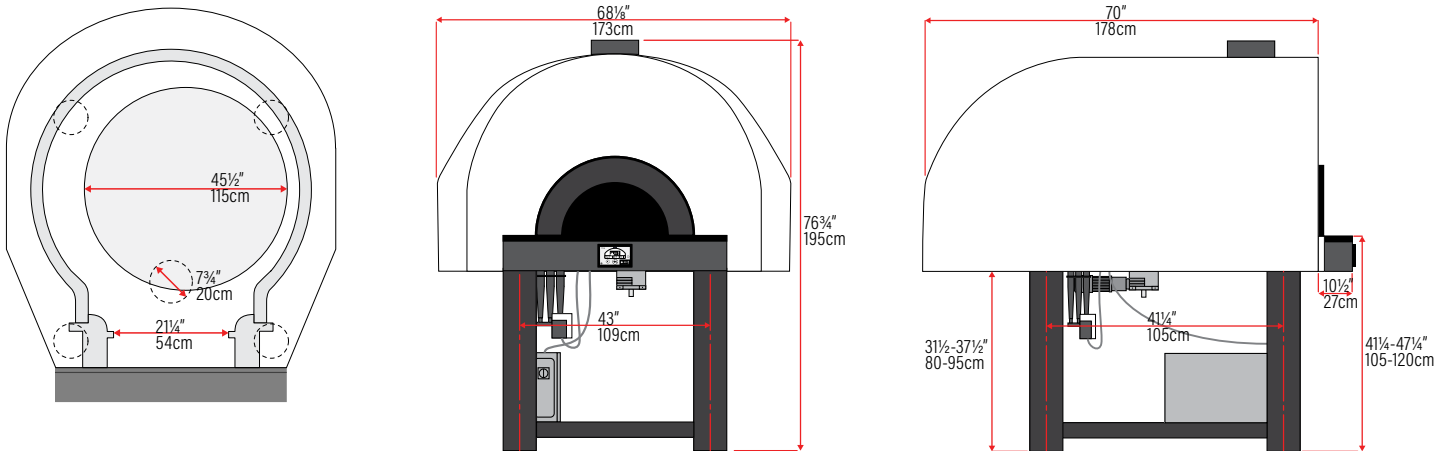

Clearance requirement is 3" (8cm) on all sides and 6" (16cm) on the top.
Optional granite mantle pictured

Fuel Position

Left side standard, right side optional.

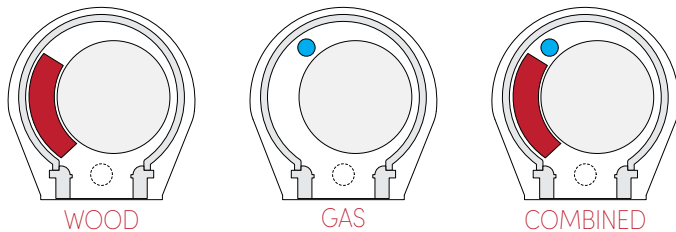

Gas Requirements (if equipped)

- 99,000 BTUs, 3/4" NPT
- Inlet pressure for natural gas 7" water column
- Inlet pressure for liquid propane gas 11" water column

Gas components must be accessible at all times for maintenance purposes.

Venting Requirements

Vent Type	Wood	Gas	Combi
Direct Vent	✓	✓	✓
Hood Vent		✓	

- The oven is vented through a 7 3/4" round duct collar.
- **Direct Venting** requires a double wall chimney pipe.
- Direct vent flue adapter available: 7 3/4"-8"
- **Hood Venting** requires installation under a type 1 exhaust hood.

Installation & venting is subject to the local authorities approval.

Electrical Information

All rotating ovens are supplied with a state of the art touch screen controller to control rotation, and gas if equipped..

Controller	Power	Plug	Cord
Touch Screen	220V/1phase	NEMA 6-15P ⊕	9', 274cm

Size Specifications

Oven Specifications				
Baking Area	Width	Depth	Height	Weight
ø 45 1/4"	68 1/8"	70"	76 3/4"	3300Lbs
ø 115cm	173cm	178cm	195cm	1500Kg

Shipping Specifications (Assembled in crate)			
Width	Depth	Height	Weight
76"	78"	86"	3700Lbs
192cm	197cm	218cm	1680Kg

Shipping Specifications (Unassembled in crates)				
	Width	Depth	Height	Weight
Crate 1	82"	43"	85"	3750Lb (Total)
	208cm	108cm	216cm	
Crate 2	70"	58"	54"	1700Kg (Total)
	178cm	148cm	136cm	

Shipping weight and dimensions may vary based on oven options selected.