



# Sliding Door Display Refrigerator KSM-40

### Durable Design

- Designed for the bottler industry with a 48" wide footprint
- Modern & attractive appearance for any kitchen, C-Store, service station, etc.
- White exterior sides and black front baked enamel steel finish
- White interior baked enamel steel finish
- Interior base in painted steel finish
- Heavy-duty polyethylene coated adjustable wire shelves
- Double-pane locking glass doors are ergonomically designed and self-closing with easy grab handles
- 2-1/2" casters

### Energy Efficient

- Entire cabinet structure engineered to the highest standards
- Built using foamed-in place high density CFC-free polyurethane
- Environment friendly R290 refrigerant
- One piece magnetic door gaskets, providing a tight and efficient seal
- ETL approved and conforms to NSF-7 standards

### Superior Quality

- Positive air flow throughout with forced air movement throughout entire cabinet
- Refrigerators hold 34-40°F for optimum preservation of foods and beverages
- High efficiency evaporators with oversized condensing units on all models
- Digital temperature readout display with electronic thermostatic control
- LED interior lighting for total product display



Project Name:	
Location:	
Item:	Qty:
Model:	




12000 Biscayne Blvd., Suite # 108  
 Miami, FL, United States 33181  
 Telephone: 786.600.4687 / Toll Free: 844.218.8477  
 Fax: 786.661.4100

5659 Royalmount Ave.  
 Montreal, QC, Canada H4P 2P9  
 Telephone: 514.737.9701 / Toll Free: 888.275.4538  
 Fax: 514.342.3854 / Toll Free: 877.453.8832  
[sales@mvpgroupcorp.com](mailto:sales@mvpgroupcorp.com) / [mvpgroupcorp.com](http://mvpgroupcorp.com)



## Sliding Door Display Refrigerator KSM-40

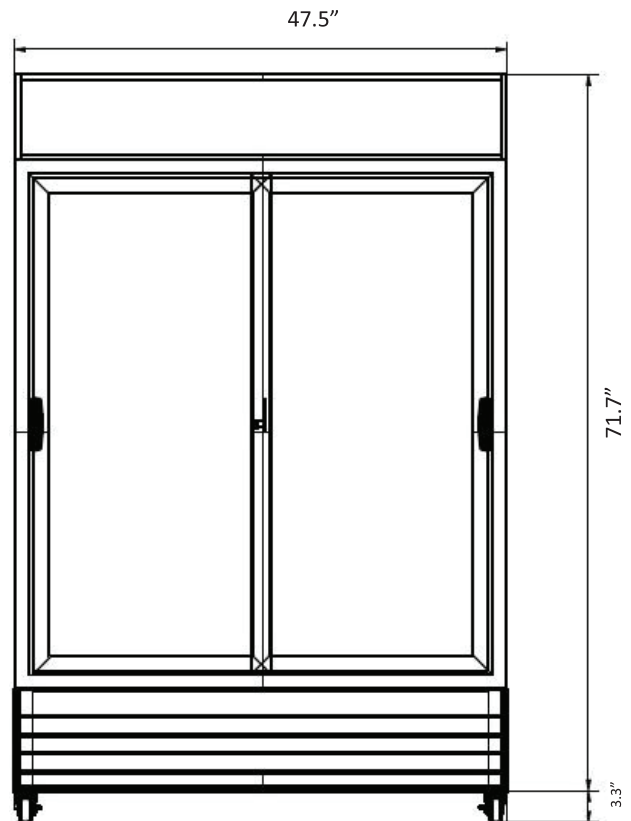

<b>Model</b>	<b>KSM-40</b>
<b>Voltage</b>	110V 60Hz
<b>Refrigerant type</b>	R290
<b>Ambient Temp</b>	18~38°C
<b>Refrigeration T</b>	0~10°C
<b>Consumption (kWh/24h)</b>	3.96
<b>Rated power (W)</b>	380
<b>Gross capacity cu. ft.</b>	37.8
<b>Net capacity cu. ft.</b>	33.5
<b>Product dimensions</b>	47.5" x 30.7" x 71.7"
<b>Packing dimensions</b>	48.8" x 33.4" x 74.1"
<b>Net weight lbs.</b>	327
<b>Gross weight lbs.</b>	373
<b>Container Loading Qty (40HQ)</b>	23
<b>Door type</b>	Sliding door
<b>Door Glass</b>	Double glass with front LOWE
<b>Handle material</b>	ABS Plastic
<b>Outside material</b>	Painted steel t0.45
<b>Inner material</b>	Painted steel t0.35
<b>Grill material</b>	Painted steel t0.8
<b>Canopy material</b>	Painted steel t0.8
<b>Refrigeration Type</b>	Dynamic cooling system
<b>Compressor</b>	Embraco EM2X3125U
<b>Compressor cooling power</b>	602W
<b>Evaporator type</b>	Aluminum fin type
<b>Condenser type</b>	Wired condenser
<b>Defrost type</b>	Auto-defrost
<b>Lighting</b>	LED light strips
<b>Light switch</b>	Round switch
<b>Controller brand</b>	Elitech ECS-180(A)
<b>Water tray evaporator type</b>	Exhaust pipe heating
<b>Castor materials &amp; size</b>	Nylon 2.5 inch
<b>No. of shelves</b>	8
<b>Lock &amp; key</b>	Included



Nema 5-15P  
Dedicated Circuit

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Warranty: 24 months parts and labor.  
Additional 36 months on compressor (part only)

KOOL-IT is a registered trademark of MVP Group.  
Specifications subject to change without notice.



12000 Biscayne Blvd., Suite # 108  
Miami, FL, United States 33181  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100

5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com