

## FEATURES

- High quality heavy duty powder coated steel cabinet with aluminium interior
- LED interior lighting, controlled from the digital interface
- Automatic defrost for stable interior temperature
- Back up data-logger battery
- RS485 interface for external monitoring devices
- Lockable door to secure sensitive contents
- Includes 3 epoxy coated shelves
- Includes 2 rear casters and 2 front leveling feet
- Built-in high & low temperature, sensor failure, door ajar, high ambient temperature & power failure alarms
- Built-in circuit breaker to protect electrical components
- High sensitivity sensors for temperature readouts within 0.1°C
- Digital temperature controller with LED temperature read out



PHR-130L

## TEMPERATURE

- Interior temperature range: 2°C to 8°C (35°F to 46°F)

## WARRANTY

- 2 years parts and labour
- 7 years compressor warranty



Project: \_\_\_\_\_

Date: \_\_\_\_\_

Price: \_\_\_\_\_

## SPECIFICATIONS

Volts (V)	Watts (W)	Amps (A)	Volume (cu./ft)	Refrigerant	Overall Dimensions			Interior Dimensions			Weight	
					Width	Depth	Height	Width	Depth	Height	Net	Gross
110V	220W	2.2A	4.6	R290	25.6	24.6	31.9	N/A	N/A	N/A	112 LBS	N/A

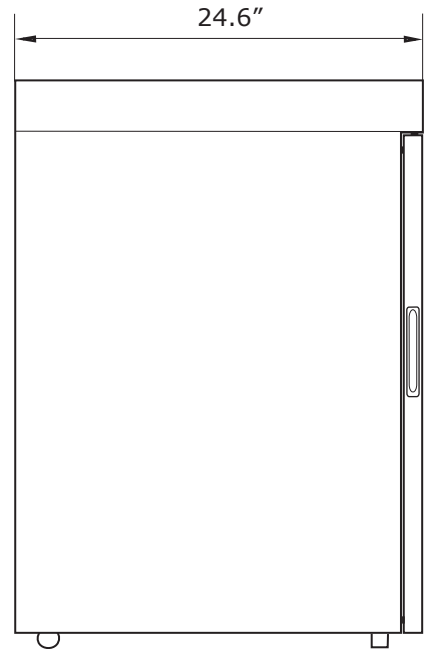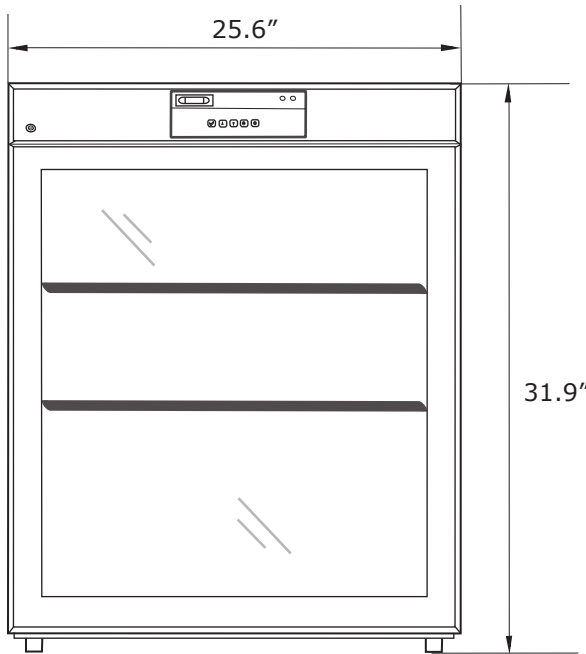

Biomedical Series Pharmacy Refrigerator

Model PHR-130L

CERTIFICATIONS:

