

## FEATURES

- High quality heavy duty powder coated steel cabinet with aluminium interior
- LED interior lighting, controlled from the digital interface
- Automatic defrost for stable interior temperature
- Back up data-logger battery
- RS485 interface for external monitoring devices
- Lockable door to secure sensitive contents
- Includes 12 epoxy coated shelves (6 per side)
- Includes set of 4 casters and adjustable feet
- Built-in high & low temperature, sensor failure, door ajar, high ambient temperature & power failure alarms
- Built-in circuit breaker to protect electrical components
- High sensitivity sensors for temperature readouts within 0.1°C
- Digital temperature controller with LED temperature read out



PHR-725L

## TEMPERATURE

- Interior temperature range: 2°C to 8°C (35°F to 46°F)

## WARRANTY

- 2 years parts and labour  
7 years compressor warranty



Project: \_\_\_\_\_

Date: \_\_\_\_\_

Price: \_\_\_\_\_

## SPECIFICATIONS

Volts (V)	Watts (W)	Amps (A)	Volume (cu./ft)	Refrigerant	Overall Dimensions			Interior Dimensions			Weight	
					Width	Depth	Height	Width	Depth	Height	Net	Gross
110V	620W	8A	25.6	R134a	43	29.8	77.6	N/A	N/A	N/A	376 LBS	N/A

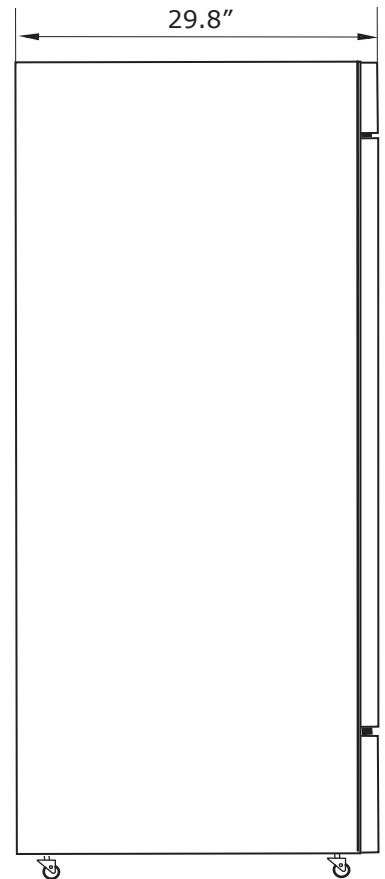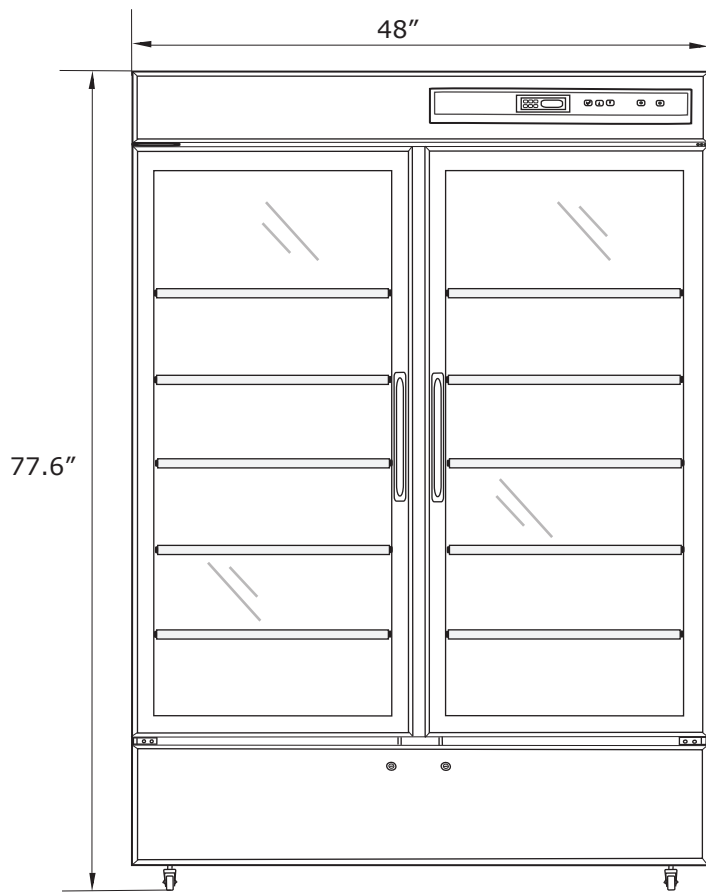

Biomedical Series Pharmacy Refrigerator

Model PHR-725L

CERTIFICATIONS:

