TRUE MANUFACTURING CO., INC. ® U.S.A. FOODSERVICE DIVISION	Project Name:	-
B U.S.A. FOODSERVICE DIVISION	Location:	
2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com	Item #: Qty: Model #:	
Model: FLM-81~TSL01 FLM-81~TSL01 Full Length Merchandiser:	arbon Refrigerant~True Standard Look Ve	ursion 01
Swing Door Nemgerator with Hydrot		
	FLM-81~TSI	L01
	The world's #1 manufacturer merchandisers.	of glass door
	Factory engineered, self-cont capillary tube system using environmentally friendly R29 carbon refrigerant that has ze depletion potential (ODP), & global warming potential (GM	0 hydro ero (0) ozone three (3)
	 High capacity, factory balance refrigeration system holds 33 (.5°C to 3.3°C) for best food p extreme conditions. 	3°F to 38°F
	Exterior - non-peel or chip bl. coated cold rolled steel ends aluminum cabinet top and be and permanent.	with black
	Interior - attractive, white alu interior liner with stainless st	minum eel floor.
	Double pane thermal insulat swing doors. Black powder co	
	Full length doors for maximu capacity.	m product
L <u>oui-True</u> ,	Self closing doors. Positive set type closure system.	al, torsion
Exterior Color Options	LED interior lighting provides lighting throughout the cabi shielded.	
	 Entire cabinet structure is foa place using a high density, pe insulation that has zero ozon potential (ODP) and zero glob potential (GWP). 	olyurethane e depletion
	Bottom mounted units featu	

- product visibility.
- Storage on top of cabinet.
- Easily accessible condenser coil for cleaning.

AIA #

ROUGH-IN DATA

Standard Black Exterior

Specifications subject to change without notice. Chart dimensions rounded up to the nearest %" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	W	D†	Н	HP	Voltage	Amps	Config.	(total m)	(kg)
FLM-81~TSL01	3	12	80¾	30¾	79	3⁄4	115/60/1	6.3	5-15P	9	810
			2051	772	2007	N/A		N/A		2.74	368

Optional Stainless Exterior

Optional White Exterior

† Depth does not include 1%" (42 mm) for door handles.

INTRE USA	APPROVALS:	AVAILABLE AT:	
10/21 Printed in U.S.A.			

Model:

FLM-81~TSL01

Full Length Merchandiser:

Swing Door Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01



STANDARD FEATURES

DESIGN

True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior non-peel or chip black powder coated cold rolled steel ends with black aluminum cabinet top and back; durable and permanent.
- Interior attractive, white aluminum liner with stainless steel floor.

- · Insulation entire cabinet structure is foamedin-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with leg levelers.

DOORS

- Double pane thermal insulated glass swing doors with black powder coated frames.
- Door sign decal. Variety of decal options available.
- Each door fitted with 12" (305 mm) long extruded handle.
- Self closing doors. Positive seal, torsion type closure system.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Twelve (12) adjustable, solid white powder coated cantilever shelves, adjustable for up to 15° tilt in 5° increments. Three (3) white PVC coated wire floor racks.
- Shelves are 24 1/2 "L X 21"D (623mm x 534 mm). Floor racks are 22 5/8 "L X 20 1/2 "D (575mm x 591mm)

LIGHTING

• LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.

- Convenient clean-out drain built in cabinet floor.
- NSF/ANSI Standard 7 compliant for open food
 - product.

ELECTRICAL


Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.


- White exterior.
- Stainless steel exterior.
- Black aluminum interior liner with black shelving.
- Clear aluminum interior liner.
- □ Stainless steel interior liner.
- □ All left hinge doors.
- All right hinge doors.
- U Wired cantilever shelves.
- Barrel locks located in grill assembly (requires one per door)
- Additional shelves.
- Product ID strips on shelves and floor racks.
- TrueFlex bottle organizers available with Wired cantilever shelf option.

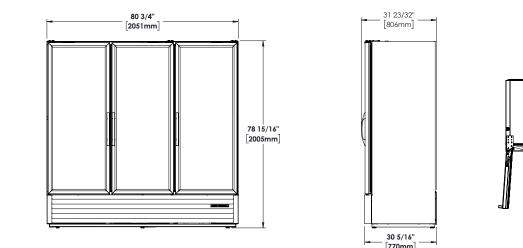

NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE

WITHOUT NOTICE



Plan

3D

Back

Flevation

Model

FLM-81~TSL01

Right



KCI

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

PLAN VIEW