VULCAN

VC44E SERIES DOUBLE DECK ELECTRIC CONVECTION OVENS

Item #



Model VC44ED Shown with optional casters



SPECIFICATIONS

Double section, electric convection oven, Vulcan Model No. (VC44ED) (VC44EC). Stainless steel front, sides, top and legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interiors measure $29"w \times 221/_8"d \times 20"h$. Two interior oven lights per section. Five nickel plated oven racks per section measure $281/_4" \times 201/_2"$. Eleven position nickel plated rack guides with positive rack stops per section. Each section heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed $1/_2$ H.P. oven blower-motor per section. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior Dimensions:

 $40^{1}\!/_{4}$ w x $41^{1}\!/_{8}$ d (includes motor & door handles) $37^{3}\!/_{4}$ d (includes motor only) x 70"h on 8" legs.

NSF listed. UL listed. UL listed to Canadian safety standards.

- □ VC44ED Solid state temperature controls adjust from 150° to 500°F. 60 minute timer with audible alarm.
- □ VC44EC Computer controls with digital time and temperature readouts. 99-hour timer with audible alarm. Roast and Hold cycle. One hundred programmable menu selections. Shelf I.D. programming.

STANDARD FEATURES

- Stainless steel front, sides, top and legs.
- Independently operated stainless steel doors with double pane windows.
- 25 total KW.
- If $\frac{1}{2}$ H.P. two speed oven blower-motor.
- Moisture vent.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interiors.
- Five nickel plated oven racks with eleven rack positions per section.
- One year limited parts and labor warranty.

OPTIONS

- Complete prison package.
 - □ Security screws only.
- □ Casters.
- □ Simultaneous chain driven doors.
- □ 480V/60 Hz/1 or 3 phase.
- Second year extended limited parts and labor warranty.

ACCESSORIES

- □ Stainless steel rear motor enclosure.
- Extra oven rack(s).
- □ Rack hanger(s).
- □ Stainless steel drip pan.
- Down draft flue diverter for direct vent connection.




OVENS

VULCAN

VC44E SERIES DOUBLE DECK ELECTRIC CONVECTION OVENS

| OPTIONAL VOLTAGES | CLEARANCES | | | | | | | | |
|---|-------------------------|-------------|-----------------|--|--|--|--|--|--|
| □ 480 volt, 60 Hz, 3 phase. | | Combustible | Non-Combustible | | | | | | |
| 220/380 volt, 50 Hz, 1 phase, 3 wire. | Rear | 2" | 2" | | | | | | |
| 220/380 volt, 50 Hz, 3 phase, 4 wire. | Right Side Left Side | 4" 1" | 4" 1" | | | | | | |
| □ 240/415 volt, 50 Hz, 3 phase, 4 wire. | Left Side | I | I | | | | | | |

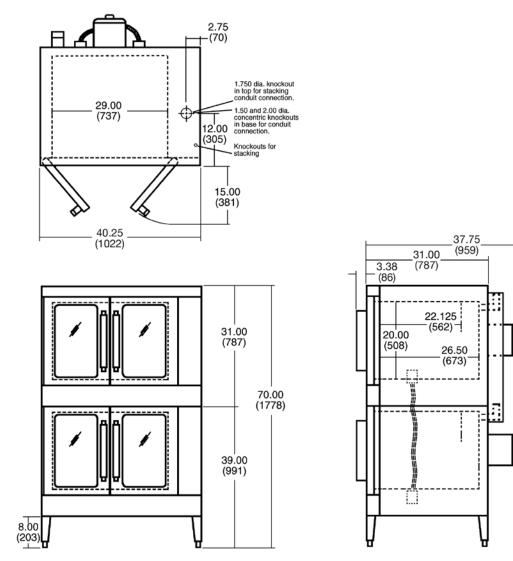

| | | 3 PHASE | | | NOMINAL AMPS PER LINE WIRE | | | | | | | | | | | WEIGHT | | | |
|-------|-------------|----------------|-----|----------|----------------------------|----|----|----------|----|----|----------|----|----|-----------------|------|--------------------|-----|------|-----|
| | TOTAL | LOAD KW PER | | 3 PHASE | | | | | | | | | | WITH SKIDS & | | WITHOUT SKIDS & | | | |
| MODEL | PHASE | | | 208 VOLT | | | 24 | 240 VOLT | | | 480 VOLT | | | 1 PHASE | | PACKAGING | | | |
| NO. | CONN. KW | X-Y | Y-Z | X-Z | Х | Υ | Ζ | Х | Y | Z | X | Y | Z | 208V | 240V | LBS. | KG | LBS. | KG |
| VC44E | 25 | 8 | 8 | 9 | 70 | 66 | 70 | 66 | 58 | 66 | 28 | 30 | 30 | 120 | 104 | 880 | 400 | 778 | 352 |



P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.