


FC063-4D_.6K.A7

Leistungsdaten Performance data

3~ 400V ±10% 50Hz

P ₁	1,9	kW
I	3,2	A
n	1360	min ⁻¹
I _A	14	A
ΔI	15	%
C _{400V/Komp.*}	6	μF
t _R	60	°C

Kennliniendaten Characteristic data

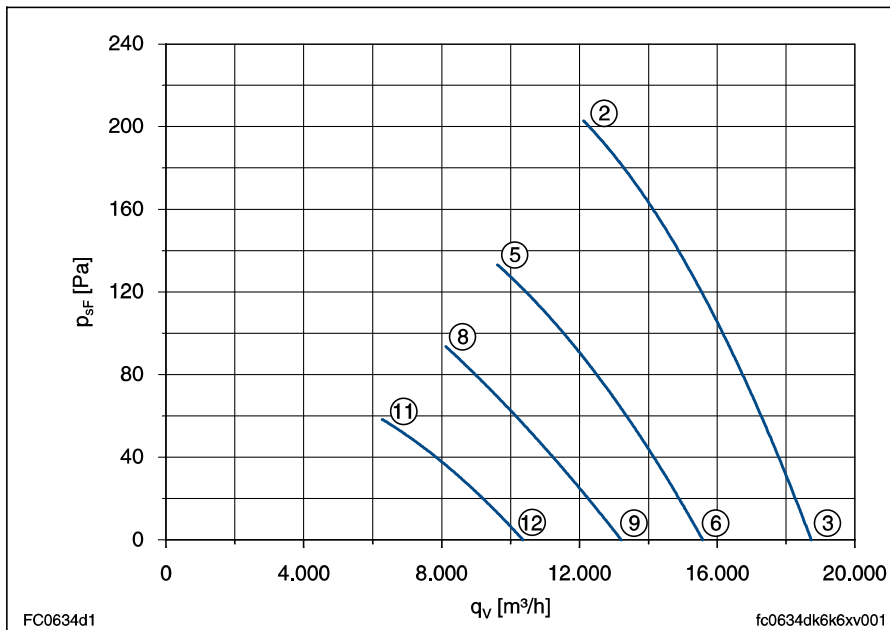

	U V	I A	P ₁ W	n min ⁻¹
②	400	3,2	1900	1360
③		3,1	1800	1380
⑤	230	3,8	1350	1110
⑥		3,7	1350	1130
⑧	180	3,8	1050	920
⑨		3,7	1000	950
⑪	140	3,4	730	740
⑫		3,4	730	770

$$p_{d2} = 4,6 \cdot 10^{-7} \cdot q_v^2$$

gemessen in Volldüse ohne
Berührungsschutz in Einbau-
art A nach ISO 5801
*measured in full bell mouth
without guard grille in
installation type A according
to ISO 5801*

*) Kompensationskondensator,
siehe Allgemeine Hinweise/
Geräuschfilter
*Compensation capacitor, see
Technical description/
Noise filter*

	②	③	⑤	⑥	⑧	⑨	⑪	⑫
L _{WA}	90	90	85	86	80	81	75	76
dB								

Maßblatt / Dimension sheet

Typ type	Artikel-Nr. article no.	Bauform design	Luftförderrichtung airflow direction	Gewicht weight	Anschlussschaltbild connection diagram	Maßblatt dimension sheet	Seite page
FC063-4DA.6K.A7	124 827	A	A	18,5 kg	106XB	L-KL-8775	4/2/5
FC063-4DD.6K.A7	125 204	D	A	22,0 kg	106XB	L-KL-8769	4/2/11
FC063-4DQ.6K.A7	125 205	Q	A	32,5 kg	106XB	L-KL-8770	4/2/17
FC063-4DF.6K.A7	132 517	F**	A	29,0 kg	106XB	L-KL-8771	4/2/30

** mit Berührungsschutz / with guard grille