



IPS215 Series

DIN-Rail Mounting

5-port 100M Layer 2 Unmanaged Industrial PoE Ethernet Switch

- Support 1 100M fiber/copper port and 4 100M PoE copper ports
- The maximum power consumption of single PoE is 30W
- PoE could power device over Ethernet, thus decreasing the cable connection of powered devices
- Input power voltage 48VDC
- Support -40~75°C wide operating temperature range



ICP Alphatec
Tel: +44 (0) 203 086 9569

www.icpalphatec.com
Email: sales@icpalphatec.com


Introduction

IPS215 Series are 5-port 100M layer 2 unmanaged industrial PoE Ethernet switches and the PoE power supply is up to the protocol standard of IEEE 802.3af/at. This series have two types of product and provide 100M copper ports, fiber ports and PoE copper ports. They adopt DIN-Rail mounting, which can meet the requirements of different scenes.

The DIP switch could implement functions like flow control, RJ45 Forced 10M and One-button VLAN, etc. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, railway transportation, smart city, safe city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

Dimension

Unit:mm

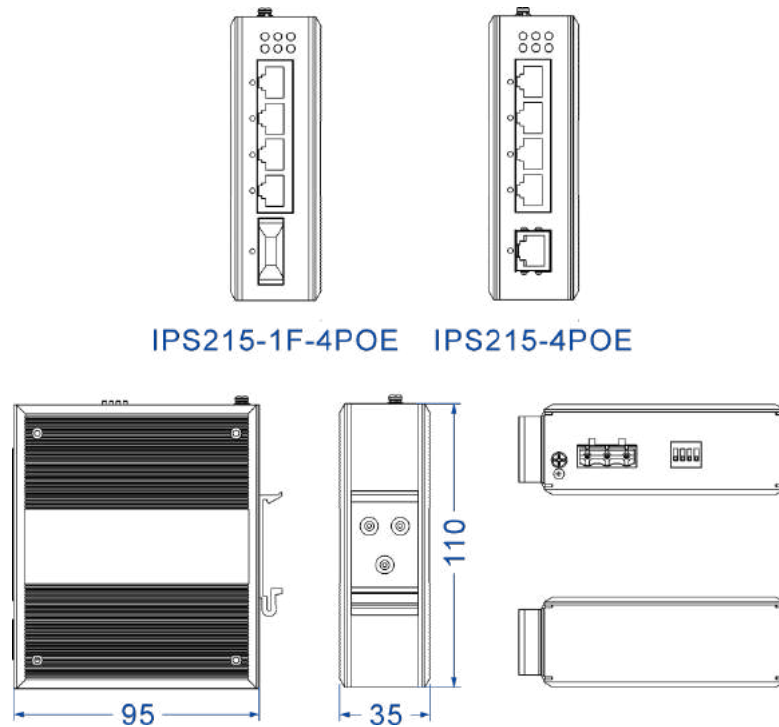

Specification

Standard & Protocol	<p>IEEE 802.3 for 10Base-T</p> <p>IEEE 802.3u for 100Base-TX and 100Base-FX</p> <p>IEEE 802.3x for Flow Control</p> <p>IEEE 802.3af for PoE</p> <p>IEEE 802.3at for PoE+</p>									
PoE	<p>The maximum power consumption of PoE port: 30W</p> <p>The power supply pin of PoE: V-, V-, V+, V+ correspond to Pin 1, 2, 3, 6</p>									
Interface	<p>Copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, Full/Half Duplex Mode, MDI/MDI-X Autotuning</p> <p>Fiber port: 100Base-FX, SC/ST/FC optional</p>									
LED Indicator	<p>Running Indicator, Port Indicator, Power Supply Indicator, PoE Indicator</p>									
Switch Property	<p>Transmission mode: store and forward</p> <p>MAC address: 2K</p> <p>Packet buffer size: 1Mbit</p> <p>Backplane bandwidth: 1.6G</p> <p>Switch time delay: <10μs</p>									
Power Requirement	<p>48VDC(44~55VDC), 3-pin 7.62mm pitch terminal blocks</p> <p>reverse polarity protection</p>									
Power Consumption	<table border="1"> <thead> <tr> <th>Model</th> <th>No-load(@48VDC)</th> <th>Full-load(@48VDC)</th> </tr> </thead> <tbody> <tr> <td>IPS215-4POE</td> <td>2.26W</td> <td>73.97W</td> </tr> <tr> <td>IPS215-1F-4POE</td> <td>2.69W</td> <td>74.06W</td> </tr> </tbody> </table>	Model	No-load(@48VDC)	Full-load(@48VDC)	IPS215-4POE	2.26W	73.97W	IPS215-1F-4POE	2.69W	74.06W
Model	No-load(@48VDC)	Full-load(@48VDC)								
IPS215-4POE	2.26W	73.97W								
IPS215-1F-4POE	2.69W	74.06W								
Environmental Limit	<p>Operating temperature range: -40~75$^{\circ}$C</p> <p>Storage temperature range: -40~85$^{\circ}$C</p> <p>Relative humidity: 5% ~ 95% (no condensation)</p>									
Physical Characteristic	<p>Housing: IP40 protection, metal</p> <p>Installation: DIN-Rail mounting</p> <p>Dimension (W x H x D): 35mm\times110mm\times95mm</p> <p>Weight: \leq370g</p>									
Industrial Standard	<p>IEC 61000-4-2 (ESD), Level 3</p> <ul style="list-style-type: none"> Air discharge: \pm8kV Contact discharge: \pm6kV 									

EN61000-4-4 (EFT), Level 3

- Power supply: $\pm 2\text{kV}$
- Ethernet port: $\pm 2\text{kV}$

IEC 61000-4-5 (Surge), Level 2 (IPS215-1F-4POE)

- Power supply: common mode $\pm 2\text{kV}$, differential mode $\pm 1\text{kV}$

IEC 61000-4-5 (Surge), Level 3 (IPS215-4POE)

- Power supply: common mode $\pm 2\text{kV}$, differential mode $\pm 1\text{kV}$
- Ethernet port: $\pm 4\text{kV}$

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certification	CE, FCC, RoHS
Warranty	5 years



Ordering Information

Part No	Article No/SKU	Description
IPS215-1F-4POE(SSC)	AT-IPS215-1F-4POE(SSC)	Unmanaged I.E DIN-Rail PoE switch with 4 x 10/100Base-T(X) PoE/PoE+ RJ45 ports +1 x 100Base-FX SC, single-mode 20KM fiber port, single power supply:45-55VDC

ICP Alphatec
Tel: +44 (0) 203 086 9569

www.icpalphatec.com
Email: sales@icpalphatec.com



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.