







## **NP308T Series**

Wall/Desktop Mounting

8 RS-232/485/422 Serial Device Server

- Support 8 RS-232, RS-485/422 or 3IN1 serial port to 1 10/100Base-T(X) self-adaptive Ethernet interface
- Support RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang, UDP
   Multicast and other operating modes
- Support 12~48VDC wide voltage input range







ICP Alphatec Tel: +44 (0) 203 086 9569 www.icpalphatec.com Email: sales@icpalphatec.com

### Introduction

NP308T series are the serial device server that can make serial device be equipped with networking capability instantly and centrally manage the scattered serial devices and hosts via network. This series include 3 types of products and provide 8 RS-232, RS-485/422 or 3IN1 serial port to 1 100M Ethernet copper port. Thereinto, RS-485/422 supports electromagnetic isolation of serial port. It adopts wall/desktop mounting to meet the requirements of different application scenes.

Serial device server supports multiple network protocols, such as TCP, UDP, SNMP, TELNET, ARP, ICMP, HTTP, DNS and DHCP protocol. It also possesses complete management functions, including Access Control, Rapid Configuration, Online Upgrading and so on. Each serial port supports 4 TCP or UDP session connections, and it also supports RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang, UDP Multicast operating modes and TELNET, WEB access modes. Furthermore, supplied management configuration tool based on Windows platform can guide the user to manage and configure the device, achieving immediate networking of serial device via simple settings. It can provide users with good experience with friendly design of network management system interface, simple and convenient operation.

DIP switch or RST button can achieve restore factory defaults of the device. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in PLC control and management, Building Automation System, Health Care Automation System, measuring instrument and environmental forces monitoring system.

### **Features and Benefits**

- Support 10/100Base-T(X) self-adaptive Ethernet interface
- Support 300bps-115200bps line speed and non-blocking communication
- Support RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang, UDP Multicast and other operating modes
- Support across gateway and routing communication
- Support multiple hosts polling mode, which allows multiple hosts to access the same serial port
- Support delimiter matching communication, achieving various demands for serial port packaging
- Support FIFO, compatible with various old type terminal devices
- Support IP address and MAC address filtering, which can easily achieve accurate access control
- Support classification of user management to realize humanized permission management


### Your Reliable Industrial Communication Expert

- Support serial port status and parameters monitoring, ensuring the communication status be clear at a glance
- Support RTS/CTS, DTR/DSR and XON/XOFF flow control
- Support SNMP network management
- Compatible with various virtual serial port management software
- Support virtual serial port drive access mode and automatic connection recovery after network interruption
- Flexible serial port data framing setting, which can satisfy user's various demands for data packets segmentation
- Support standard TCP/IP SOCKET application access
- TCP supports multi-connection, which allows maximum 4 users to monitor or manage the serial device simultaneously
- UDP supports single machine or multi-machine communication, which allows multiple users to monitor or manage the serial device simultaneously
- Support Windows configuration tool, TELNET, WEB and other configuration forms

### **Dimension**


#### Unit:mm

NP308T-8D(RS-232)

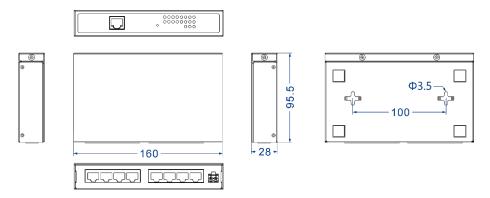


NP308T-8DI(RS-485)



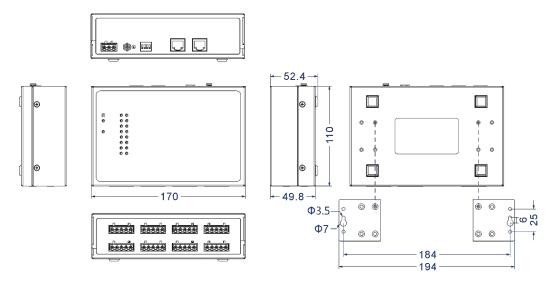

NP308T-8D (3IN1)-RJ45

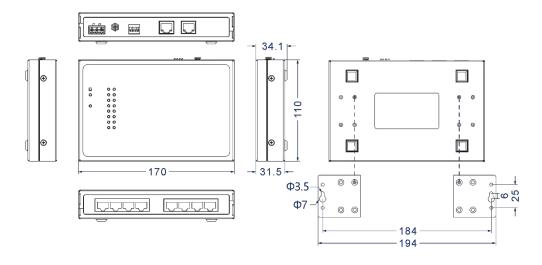

# **Specification**

Ethernet	Standard: 10Base-T, 100Base-TX Protocol: TCP, UDP, ARP, HTTP, TELNET, SNMP, ICMP, DHCP, DNS Rate: 10/100M automatic flow control, MDI/MDI-X autotunning Interface quantity: 1 Interface form: RJ45 Duplex mode: full/half duplex mode self-adaption
Ethernet	Interface quantity: 1 Interface form: RJ45
	Operating mode: 4 sessions, support RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang and UDP Multicast operating modes

### Your Reliable Industrial Communication Expert

Serial Port	Standard: EIA RS-232C, RS-485, RS-422 Quantity of serial port: 8 RS-232, RS-485/422 or 3IN1 serial port RS-232 signal: DSR, RTS, GND, TXD, RXD, DCD, CTS, DTR RS-485 signal: D+, D-, GND RS-422 signal: T+, T-, GND, R+, R- Baud rate: 300-115200bps Data bit: 5bit, 6bit, 7bit, 8bit Parity bit: None, Even, Odd, Space, Mark Stop bit: 1bit, 2bit Interface form: RS-232 serial port, adopt RJ45;
Configuration	WEB configuration management, TELNET configuration, Windows configuration tool
Security	Classification of User Permissions, IP address filtering, MAC address filtering, WEB console, TELNET console
Indicator	Power supply indicator, running indicator, Ethernet port indicator, serial port indicator
Power Requirement	<ul> <li>NP308T-8D(RS-232)</li> <li>Power supply range: 9~48VDC</li> <li>Connection mode: 2-pin 5.08mm pitch terminal blocks</li> <li>NP308T-8DI(RS-485), NP308T-8D(3IN1)-RJ45</li> <li>Power supply range: 12~48VDC</li> <li>Connection mode: 3-pin 5.08mm pitch terminal blocks</li> <li>Power supply protection: nonpolarity connection</li> </ul>
Power Consumption	No-load: ≤3.16W@12VDC Full-load: ≤3.90W@12VDC
Environmental Limit	NP308T-8D(RS-232), NP308T-8D(3IN1)-RJ45  Operating temperature range: -40~75°C  Storage temperature range: -40~85°C  Relative humidity: 5% ~ 95% (no condensation)

NP308T-8DI(RS-485)

### Your Reliable Industrial Communication Expert

	<ul> <li>Storage temperature range: -40~70°C</li> <li>Relative humidity: 5% ~ 95% (no condensation)</li> </ul>
Physical Characteristic	Housing: IP30 protection, metal Installation: wall/desktop mounting Dimension (W x H x D): 160mm×28mm×95.5mm (RS-232); 170mm×49.8mm×110mm(RS-485/422); 170mm×31.5mm×110mm (3IN1) Weight: 524g(RS-232), 740g(RS-485/422), 590g(3IN1)
	<ul> <li>IEC 61000-4-2 (ESD, Electro-static Discharge) , Level 4</li> <li>Air discharge: ±15kV</li> <li>Contact discharge: ±8kV</li> </ul>
Industrial Standard	IEC 61000-4-4 (EFT/B, Electrical Fast Transient/Burst), Level 3 (not including RS-232)  Power supply: ±2kV  Signal: ±1kV
	<ul> <li>IEC 61000-4-5 (Surge), Level 3 (not including RS-232)</li> <li>Power supply: common mode ±2kV, differential mode ±1kV</li> <li>Signal: common mode ±2kV, differential mode ±1kV</li> </ul>
	Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Certification	CE, FCC, RoHS
Warranty	3 years

Operating temperature range: -40~70°C

## **Ordering Information**

Part No	Article No/SKU	Description
NP308T- 8D(3IN1)	AT-NP308T- 8D(3IN1)	Serial Device Server 8 x RS-232/485/422(RJ-45)+ 1 x 10/100Base-T(X), single power supply 12-48VDC, wall-mounting

ICP Alphatec Tel: +44 (0) 203 086 9569



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road,

Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com Website: www.3onedata.com

◀ Please scan our QR code for more details

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.

www.icpalphatec.com

Email: sales@icpalphatec.com