

# T(P)GS-R5616MGFT

**16 10/100/1000T + 4 1G/2.5G Copper + 2 1G/2.5G Fiber Q-ODC OM3  
(with 8/10/12/16 PoE) , EN50155 OS4 Managed Ethernet Switch w/  
Enhanced G.8032 Ring, PXE ; WVI / 24V / 24TV input**

- Total 16 10/100/1000T + 4 1G/2.5G Copper + 2 1G/2.5G Fiber Q-ODC OM3
- PoE model: w8/16 or w/10/12 (incl.8 10/100/1000T + 2/4 uplink 1G/2.5G copper) PoE ports
- PoE model: Support IEEE802.3at/af up to 30W per port PoE management incl. Detection and Scheduling
- Enhanced G.8032 ring protection < 20ms for single ring. Supports enhanced mode and basic mode; Enhanced G.8032 ring covers multicast packets; MSTP 8 MSTI /RSTP; support MRP ring
- Support PXE to verify switch firmware with the latest or certain version on server
- Miss-wiring avoidance & node failure protection
- User friendly UI, including auto topology drawing ; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, MLD snooping, DHCP server & DHCP Option82; DHCP Snooping, Port based DHCP distribution, Mac based DHCP server, SSH v2/SSL, HTTPS, INGRESS ACL L2/L3,TACACS+, QinQ, QoS by VLAN
- Protocol based VLAN ; IPv4 Subnet based VLAN
- Enhanced Environmental Monitoring for temp., actual input voltage, current & PoE total power load
- Optional smart bypass on 1G/2.5G copper ports in case of power failure, CPU hang (up to two pairs copper bypass and one pair fiber bypass)
- Optional L3Lite or IEC 61375-2-5 TBN features to be upgradable
- Inrush current protection
- IP54/IP67 aluminum enclosure
- USB port to upload & download the configuration file
- Dual power input 16.8~137.5VDC (WVI Model) ; 9~36VDC (24V Model); 16.8~56VDC (24TV model) with galvanic isolation between input power, PoE and system
- Factory reset pin to restore to factory default setting
- Wide range operation temperature: -40~70C/-40~158F



## OVERVIEW

Lantech T(P)GS-R5616MGFT is a high performance L2+ Ethernet switch with 16 10/100/1000T + 4 1G/2.5G Copper + 2 1G/2.5G Q-ODC OM3 with 8/16 or w/10/12 (incl.8 10/100/1000T + 2/4 uplink 1G/2.5G copper) PoE 802.3af/at ports which provides advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms in single ring while also supports enhanced mode with easy configuration. The comprehensive QoS, advanced security including INGRESS ACL L2/L3, TACACS+, SSH v2/SSL and Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port are supported and also required in large network. It also supports 10K Jumbo frames.

**Miss-wiring avoidance, node failure protection, Loop**

### protection

The T(P)GS-R5616MGFT also embedded several features for strong and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech T(P)GS-R5616MGFT is able to alert with the LED indicator and disable ring automatically. Node failure protection ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection.

**DHCP option 82 & Port based, Mac based DHCP, Option66, DHCP Snooping, IPv6 DHCP server**

DHCP server can assign dedicated IP address by MAC or by port (Port based for single switch), it also can assign IP address by port for multiple switches with single DHCP option82 server. DHCP Snooping is supported. DHCP Option66 server can offer IP address of TFTP server to DHCP client for VOIP application. Basic IPv6 DHCP service can be supported.

#### **Support PXE to verify switch firmware with the latest or certain version**

The switch can check its firmware version during booting time via PXE protocol. If switch finds any newer version, it will upload automatically.

#### **User friendly GUI, Auto topology drawing**

The user friendly UI, innovative auto topology drawing and topology demo makes T(P)GS-R5616MGFT much easier to get hands-on. The complete CLI enables professional engineer to configure setting by command line.

#### **Enhanced G.8032 ring, 8 MSTI MSTP; MRP ring**

Lantech T(P)GS-R5616MGFT features enhanced G.8032 ring which can be self-healed in less than 20ms for single ring topology protection covering multicast packets. It also supports various ring topologies that covers enhanced ring and basic ring by easy setup than others. It supports MSTP that allows RSTP over VLAN for redundant links with 8 MSTI. MRP (Media Redundancy Protocol) can be supported for industrial automation networks.

#### **Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN**

Lantech OS4 Ethernet switches comply with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).

#### **Enhanced Storm Control**

Storm control prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces and the detection is more precise and reaction is more efficient.

#### **Optional L3Lite/L3\*ETBN to be upgradable**

Lantech OS4 are optional upgradable to L3 Lite/ L3\* or ETBN communication protocols for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing. Optional ETBN complies with IEC61375-2-5 ETBN for Train Backbone Network.

#### **QinQ, QoS and GVRP supported**

It supports the QinQ, QoS and GVRP for large VLAN segmentation.

#### **Up to 8/10/12/16 (at) PoE at/af ports w/advanced PoE management**

Compliant with 802.3af/at standard, the Lantech TPGS-R5616MGFT is able to feed each PoE port up to 30 Watt at each PoE port for various IP PD devices. Lantech TPGS-R5616MGFT supports advanced PoE management including PoE detection and scheduling. PoE detection can detect if the connected PD hangs then restart the PD; PoE scheduling is to allow pre-set power feeding schedule upon routine time table. Each PoE port can be Enabled/disabled, get the voltage, current, Watt, and temperature info displayed on WebUI.

#### **Dual WVI / 24V / 24TV input with max PoE budget and**

#### **Inrush current protection**

The T(P)GS-R5616MGFT accept 16.8~137.5VDC (WVI model) ; 9~36VDC (24V model) ; 16.8~56VDC (24TV model) dual input with galvanic isolation and PoE model can feed 54W output for PoE feeding with 80W budget. The inrush current on initial power up can be limited lower than 10 x nominal current.

#### **IGMPv3, GMRP, router port, MLD Snooping, static multicast forwarding and multicast Ring protection**

The unique multicast protection under enhanced G.8032 ring can offer immediate self-recovery instead of waiting for IGMP table timeout. It also supports IGMPv3, GMRP, router port, MLD snooping and static multicast forwarding binding by ports for video surveillance application.

#### **802.1X security by MAC address**

MAC-based port authentication is an alternative approach to 802.1x for authenticating hosts connected to a port. By authenticating based on the host's source MAC address, the host is not required to run a user for the 802.1x protocol. The RADIUS server that performs the authentication will inform the switch if this MAC can be registered in the MAC address table of switch.

#### **Protocol based VLAN; Subnet based VLAN**

The protocol-based VLAN processes traffic based on protocol. It filters IP traffic from nearby end-stations using a particular protocol such as IP, IPX, ARP or other Ethernet-types in a Hex value. Subnet based VLANs group traffics into logical VLANs based on the source IP address and IP subnet. The above features can help to build VLAN in the network mixed with managed and un-managed switch as to define packets to which VLAN group based on protocol or subnet.

#### **Editable configuration file; USB port for upload/download configuration**

The configuration file of Lantech T(P)GS-R5616MGFT can be exported and edited with word processor for the following switches to configure with ease.

The USB port can upload/download the configuration from/to USB dongle.

#### **Event log & message; 2 DI + 2DO; Factory default pin**

T(P)GS-R5616MGFT provides 2DI and 2DO. When disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the outside alarm and switch will send alert information to IP network with email and traps. The factory reset pin can restore the setting back to factory default.

#### **Enhanced environmental monitoring for switch inside information**

The enhanced environmental monitoring can detect switch overall temperature, total power load, actual input voltage and current. It also can send the SNMP traps alert when abnormal.

#### **Optional smart bypass protection on dual 1G/2.5G copper ports\*\* and 1G/2.5G fiber port\*\***

The bypass relay is set to bypass the switch to the next one when power is off to prevent network disruption. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. Optional smart bypass (Up to two pairs copper

and one pair fiber bypass) can be activated when switch encounters power failure or CPU hang. (-BT/-BBT/-BF/-BBT-BF model)

**EN50155, EN45545-2; EN61373 compliance; High ESD protection**

T(P)GS-R5616MGFT passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire &

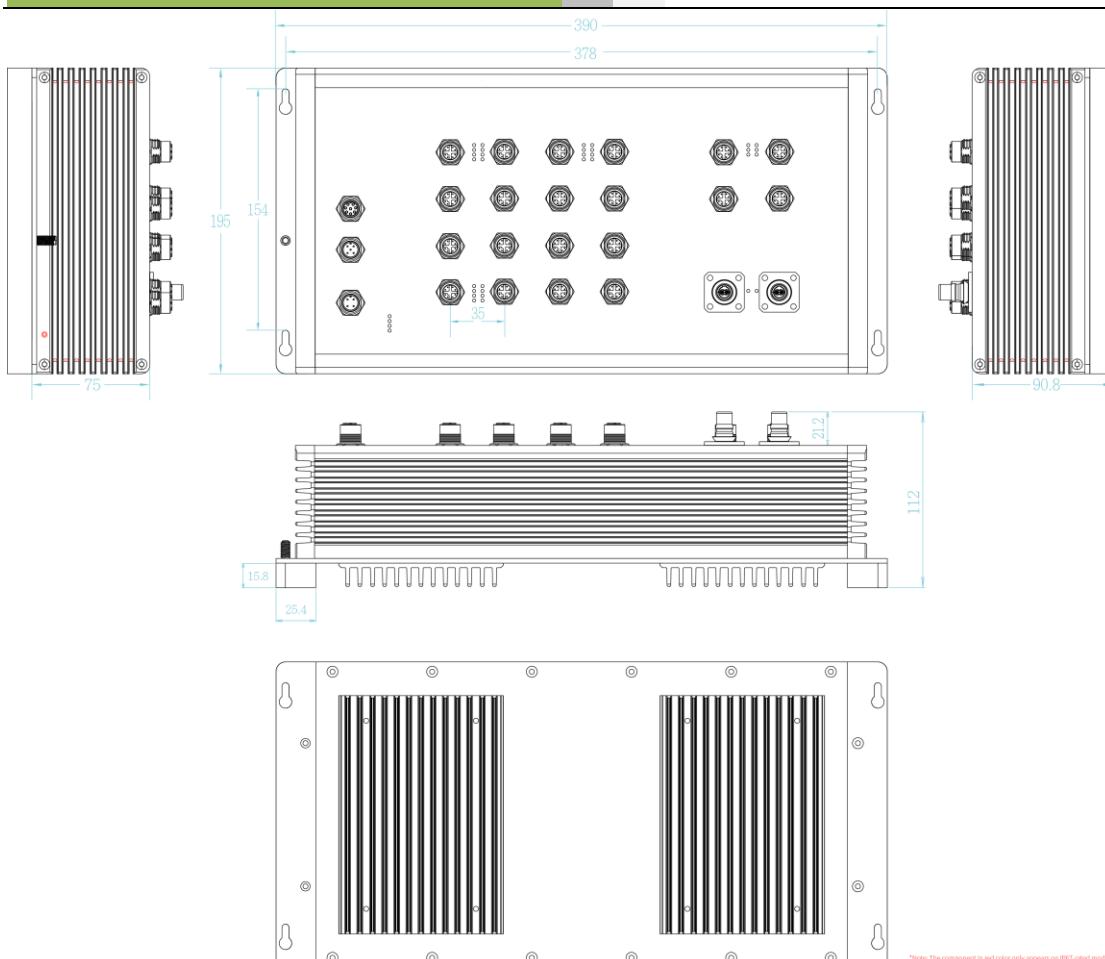
Smoke and EN50155 verification, the T(P)GS-R5616MGFT is best switch for railway on-board/track side, vehicle and mining applications. For more usage flexibilities, T(P)GS-R5616MGFT supports wide operating temperature from -40°C to 70°C. (85°C operation for 10 min.)

## FEATURES & BENEFITS

- 16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Q-ODC OM3 (Total 22 Ports Switch)
- PoE model: with 8/16 or w/10/12 (incl. 8 10/100/1000T + 2/4 uplink 1G/2.5G copper) PoE 802.3af/at ports to feed power up to 30W for active mode operation (PoE budget 80W)
- Dual 16.8~137.5VDC input (WVI model) ; Dual 9~36VDC input (24V model) ; Dual 16.8~56VDC input (24TV model)
- PoE model: PoE management including PoE detection and scheduling for PD (power devices)
- Galvanic isolation from power input/Ethernet ports to system 1.5KV
- Back-plane (Switching Fabric): 62Gbps
- 16K MAC address table
- 10KB Jumbo frame
- User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting
- Enhanced G.8032 Ring protection in 20ms for single ring
  - Support various ring/chain topologies, including enhanced ring & basic ring
  - Enhanced G.8032 ring configuration with ease
  - Cover multicast and data packets protection
- Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority
- IEEE 802.1d STP, IEEE 802.1w RSTP, 802.1s MSTP VLAN redundancy with 8 MSTI
- Subnet VLAN and protocol VLAN
- 4K 802.1Q VLAN, Port based VLAN, GVRP, QinQ, QoS
- Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console
- Support PXE to verify switch firmware with the latest or certain version
- DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server; Port based DHCP server; DHCP Snooping; DHCP Option 66 ; basic IPv6 DHCP server
- Mac based DHCP server to assign IP address in DHCP network
- Bandwidth Control
  - Ingress packet filter and egress\* rate limit
  - Broadcast/multicast packet filter control
- Miss-wiring avoidance
  - LED indicator
- Node failure protection
  - Ensure the switches in a ring to survive after power breakout is back
  - The status can be shown in NMS when each switch is back
- System Event Log, SMTP\*\* alert and SNMP Trap for alarm support
- Security
  - SSL/SSH v2/INGRESS ACL L2/L3
  - MAC address table: MAC address entries/Filter/static MAC-Port binding
  - Remote Admin: IP address security management to prevent unauthorized intruder
  - TACACS+
  - Login Security: IEEE802.1X/RADIUS
- HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
- IGMP router port for multicast protection
- IGMPv1,v2,v3 with Query mode for multi media
- MLD Snooping for IPv6 Multicast stream
- Dual image firmware support
- Factory reset pin to restore setting to factory default
- Enhanced environmental monitoring for system actual input voltage, current, ambient temperature and total power load
- Supports 2DI/2DO (Digital Input/Digital Output)
- Configuration backup and restoration
  - Supports editable configuration file for system quick installation
  - USB port for upload/download the config
- TFTP/HTTP firmware upgrade
- Diagnostic including Ping / ARP table / DDM information
- Enhanced Storm Control
- Optional L3Lite/L3\*/ETBN to be upgradable
- Built-in IEC 61375-3-4 ECN (Ethernet Consist Network) to work with IEC61375-2-5 TBN
- Optional smart bypass (Up to two pairs copper and one pair fiber bypass) (-BT/-BBT/-BF/-BBT-BF model)
- Inrush current protection
- Wide operation temperature: -40C~70C/-40F~158F (85°C operation for 10 min.)

- EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration verification
- IP54/IP67 aluminum housing with wall mount design

## DIMENSIONS (unit=mm)


\*Note: The component in red color only appears on IP67-rated models.

## SPECIFICATIONS

### Hardware Specification

Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 100Base-T IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE802.3ad Link Aggregation Control Protocol (LACP) IEEE802.1AB Link Layer Discovery Protocol (LLDP) IEEE802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.3at/af Power over Ethernet	cable Power Input connector: 1 x M12 4-pole Male X-coded Reset/Console/USB : 1 x M12 8-pole X-coded DIDO: 1 x M12 5-pole X-coded
Switch Architecture	Back-plane (Switching Fabric): 62Gbps	Network Cable 10Base-T: 2-pair STP Cat. 3, 4, 5/ 5E/ 6 cable
Mac Address	16K MAC address table	1G/1.25Giga Optical Cable Multi-mode: 50/125um~62.5/125um Single mode: 9/125um Available distance: 550m (Multi-mode)/40km (Single-mode) Wavelength: 850nm (Multi-mode)/1310nm (Single-mode)
Jumbo frame	10KB	2.5G Optical Cable Multi-mode: 50/125um~62.5/125um Single mode: 9/125um Available distance: 300m (Multi-mode)/40km (Single-mode) Wavelength: 850nm (Multi-mode)/1310nm (Single-mode)
Connectors	10/100/1000T: 16 x M12 8-pole X-coded with Auto MDI/MDI-X function 1G/2.5G Copper: 4 x M12 8-pole X-coded with Auto MDI/MDI function 1G/2.5G Dual Speed Fiber: 2 x Q-ODC OM3 connector for single-mode or multi-mode type fiber	LED Per unit: Power 1 (Green), Power 2 (Green), FAULT (Red); RM(Green) 10/100/1000T Ethernet port: Link/Activity (Green) 1G/2.5G copper: Link/Act (Yellow) 1G/2.5G fiber: Link/Act (Orange) PoE : Link/Act (Green) (PoE model)
		DI/DO 2 Digital Input (DI) :

	Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output (DO): Open collector to 80 VDC, 50mA	Enhanced Environmental Monitoring	System status for actual input voltage, current, total power load and ambient temperature to be shown in GUI and sent alerting if any abnormal status
Operating Humidity	5% ~ 95% (Non-condensing)	VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096) GVRP, QinQ, QoS Protocol based VLAN IPv4 Subnet based VLAN
Operating Temperature	-40°C~70°C / -40°F~158°F (85°C operation for 10 min.)	Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree 8 MSTI
Storage Temperature	-40°C~85°C / -40°F~185°F	Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP
Power Supply	Dual DC input 16.8~137.5VDC (WVI model) ; 9~36VDC (24V model) ; 16.8~56VDC (24TV model)	Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
PoE Budget (PoE model)	80W Higher PoE budget can be applied upon request. **	Remote Admin	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder
PoE pin Assignment (PoE model)	M12 port #1~#8 (-8 model) M12 port #1~#8, #19~#20 (-10 model) M12 port #1~#8, #17~#20 (-12 model) M12 port #1~#16 (-16 model)	Login Security	Supports IEEE802.1X Authentication/RADIUS
	Support IEEE 802.3at/af End-point, Alternative A mode	Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"
Power Consumption	Max. 47.6W exclude PoE load	Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/static MAC-Port binding Ingress ACL L2/L3 SSL/SSH v2 for Management HTTPS for secure access to the web interface TACACS+ for Authentication
Dimensions	IP54/IP67 model: Aluminum case 304mm(W)x195mm(H)x96.2mm(D)	IGMP	Support IGMP snooping v1,v2,v3; Supports IGMP static route; 1024 multicast groups; IGMP router port ; IGMP query; GMRP
Weight	5.15kgs	MLD Snooping	Support IPv6 Multicast stream
Installation	Wall Mount Design	Static multicast forwarding	Static multicast forwarding forward reversed IGMP flow with multicast packets binding with ports for IP surveillance application
EMI & EMS	FCC Part 15 Class A IEC/EN61000-6-2 IEC/EN61000-6-4 CE EN55032 Class A CE EN50524: CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE N61000-4-8 (Magnetic field) Level 3	Bandwidth Control	Support ingress packet filter and egress* packet limit. The egress* rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress* packet limit.
Verifications	EN50155/EN50121-3-2/EN50121-4; EN 45545-1, EN 45545-2 Fire & Smoke verification	Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
Stability Testing	EN61373 (Shock and Vibration)	System Log	Supports System log record and remote system log server
MTBF	315,560 hrs (standards: IEC 62380)	Protection	<ul style="list-style-type: none"> <li>■ Miss-wiring avoidance</li> <li>■ Node failure protection</li> <li>■ Loop protection</li> </ul>
Warranty	5 years	SNMP Trap	Up to 5 trap stations; trap types including: <ul style="list-style-type: none"> <li>● Device cold start</li> <li>● Authorization failure</li> <li>● Port link up/link down</li> <li>● DI/DO open/close</li> <li>● Topology change(ITU ring)</li> <li>● Power failure</li> <li>● Environmental abnormal</li> </ul>
Bypass**	Up to two pairs copper and one pair fiber bypass on 1G/2.5G Copper ports and 1G/2.5G Fiber Q-ODC ports to pass to next switch in case of power failure and CPU hang	PXE	PXE to verify switch firmware with the latest or certain version
<b>Software Specification</b>			
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI	DHCP	Provide DHCP Client/ DHCP Server/DHCP Option 82/Port based DHCP; DHCP Snooping; DHCP Option 66 ; basic IPv6 DHCP server
SNMP MIB	RFC 1213 MIBII RFC 1158 MIB RFC 1157 SNMP MIB RFC 1493 Bridge MIB* RFC 1573 IF MIB RFC 2674 Q-Bridge MIB* RFC 2819 RMON MIB Private MIB	Mac based DHCP Server	Assign IP address by Mac in DHCP network
ITU G.8032	Support ITU G.8032 for Ring protection in less than 20ms for self-heal recovery (single ring enhanced mode) Support basic single ring & enhanced ring Enhanced G.8032 ring configuration with ease Cover multicast & data packets protection	DNS	Provide DNS client feature and can set Primary and Secondary DNS server
PoE Management (PoE model)	PoE Detection to check if PD hangs then restart the PD PoE scheduling	NTP/SNTP	Supports NTP/SNTP to synchronize system clock in Internet
Per Port PoE Status (PoE model)	On/ Off, voltage, current, watts, temperature	Firmware Update	Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade
User friendly UI	<ul style="list-style-type: none"> <li>■ Auto topology drawing</li> <li>■ Topology demo</li> <li>■ Complete CLI for professional setting</li> </ul>		
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups		
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN		
CDP	Cisco Discovery Protocol for topology mapping		

Configuration upload and download	Supports editable configuration file for system quick installation; Support factory reset ping to restore all settings back to factory default	Optional L3Lite/L3*/ETBN**	Lantech OS4 are optional upgradable to L3 Lite/ L3* or ETBN communication protocols for future expansion. The optional L3Lite includes editable routing table, VRRP, Router-on-a-stick, Inter- VLAN routing. Optional ETBN complies with IEC61375-2-5 ETBN for Train Backbone Network. Detail SPEC upon request.
Enhanced Storm Control	prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on one of the physical interfaces		Support Ping, ARP table and DDM information
ECN	Complies with IEC 61375-3-4 (ECN) standard. The support of Ethernet Consist Network allows interconnection between end devices located in single consist of train and interoperability with IEC61375-2-5 (TBN).		Support dual image firmware function

\*Future release

\*\*Optional

## ORDERING INFORMATION

All model packages include M12 caps. For optional bypass add -BT (one pair copper bypass); -BBT (two pairs copper bypass); -BF (one pair Fiber bypass); -BBT-BF (two pairs copper & one pair fiber bypass) to end of model names. For Coating add -C to end of model names.

- **TPGS-R5616MGFT-8-QMM-54-WVI.....P/N: 8361-471**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-8-QSM-54-WVI.....P/N: 8361-4711**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-10-QMM-54-WVI.....P/N: 8361-4712**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-10-QSM-54-WVI.....P/N: 8361-4713**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-12-QMM-54-WVI.....P/N: 8361-4714**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-12-QSM-54-WVI.....P/N: 8361-4715**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-16-QMM-54-WVI.....P/N: 8361-4716**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-16-QSM-54-WVI.....P/N: 8361-4717**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TGS-R5616MGFT-QMM-54-WVI.....P/N: 8361-4718**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TGS-R5616MGFT-QSM-54-WVI.....P/N: 8361-4719**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-8-QMM-67-WVI.....P/N: 8361-5292**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-8-QSM-67-WVI.....P/N: 8361-5293**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-10-QMM-67-WVI.....P/N: 8361-5294**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to

- 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-10-QSM-67-WVI.....P/N: 8361-5295**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QMM-67-WVI.....P/N: 8361-5296**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QSM-67-WVI.....P/N: 8361-5297**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QMM-67-WVI.....P/N: 8361-5298**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QSM-67-WVI.....P/N: 8361-5299**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TGS-R5616MGFT-QMM-67-WVI.....P/N: 8361-5287**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TGS-R5616MGFT-QSM-67-WVI.....P/N: 8361-5288**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~137.5VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-8-QMM-54-24V.....P/N: 8361-47101**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-8-QSM-54-24V.....P/N: 8361-47111**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-10-QMM-54-24V.....P/N: 8361-47121**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-10-QSM-54-24V.....P/N: 8361-47131**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QMM-54-24V.....P/N: 8361-47141**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QSM-54-24V.....P/N: 8361-47151**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QMM-54-24V.....P/N: 8361-47161**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QSM-54-24V.....P/N: 8361-47171**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TGS-R5616MGFT-QMM-54-24V.....P/N: 8361-47181**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS4 Managed Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TGS-R5616MGFT-QSM-54-24V.....P/N: 8361-47191**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; EN50155 OS4 Managed Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-8-QMM-67-24V.....P/N: 8361-52921**

- 16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-8-QSM-67-24V.....P/N: 8361-52931**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-10-QMM-67-24V.....P/N: 8361-52941**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-10-QSM-67-24V.....P/N: 8361-52951**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QMM-67-24V.....P/N: 8361-52961**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QSM-67-24V.....P/N: 8361-52971**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QMM-67-24V.....P/N: 8361-52981**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QSM-67-24V.....P/N: 8361-52991**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TGS-R5616MGFT-QMM-67-24V.....P/N: 8361-52871**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS4 Managed Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TGS-R5616MGFT-QSM-67-24V.....P/N: 8361-52881**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; EN50155 OS4 Managed Ethernet Switch ; 9V~36VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-8-QMM-54-24TV.....P/N: 8361-47102**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-8-QSM-54-24TV.....P/N: 8361-47112**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-10-QMM-54-24TV.....P/N: 8361-47122**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-10-QSM-54-24TV.....P/N: 8361-47132**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QMM-54-24TV.....P/N: 8361-47142**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-12-QSM-54-24TV.....P/N: 8361-47152**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QMM-54-24TV.....P/N: 8361-47162**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
  - **TPGS-R5616MGFT-16-QSM-54-24TV.....P/N: 8361-47172**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/16 PoE

at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation

- **TGS-R5616MGFT-QMM-54-24TV.....P/N: 8361-47182**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TGS-R5616MGFT-QSM-54-24TV.....P/N: 8361-47192**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP54 housing w/ galvanic isolation
- **TPGS-R5616MGFT-8-QMM-67-24TV.....P/N: 8361-52922**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-8-QSM-67-24TV.....P/N: 8361-52932**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/8 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-10-QMM-67-24TV.....P/N: 8361-52942**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-10-QSM-67-24TV.....P/N: 8361-52952**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/10 PoE at/af incl.2 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-12-QMM-67-24TV.....P/N: 8361-52962**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-12-QSM-67-24TV.....P/N: 8361-52972**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/12 PoE at/af incl.4 1G/2.5G Copper EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-16-QMM-67-24TV.....P/N: 8361-52982**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TPGS-R5616MGFT-16-QSM-67-24TV.....P/N: 8361-52992**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; w/16 PoE at/af EN50155 OS4 Managed POE Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TGS-R5616MGFT-QMM-67-24TV.....P/N: 8361-52872**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Multimode Q-ODC OM3 Giga 550M /2.5G 300M ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation
- **TGS-R5616MGFT-QSM-67-24TV.....P/N: 8361-52882**  
16 10/100/1000T + 4 1G/2.5G Copper M12 X-coded + 2 1G/2.5G Fiber Single mode Q-ODC OM3 Up To 40KM ; EN50155 OS4 Managed Ethernet Switch ; 16.8V~56VDC dual input ; -40°C to 70°C /-40F~158F ; IP67 housing w/ galvanic isolation

## OPTIONAL ACCESSORIES

### Software package

- **OS4 – L3L.....P/N: 9000-110**  
OS4 software platform with Layer 3 Lite functions (please check Lantech software data sheet for details)
- **OS4 – IEC61375-2-5 .....P/N: 9000-111**  
OS4 software platform with IEC-61375-2-5 ETBN (Ethernet Train Backbone Networks) function (please check Lantech software data sheet for details)
- **OS4 – L3\*.....P/N: 9000-112**  
OS4 software platform with Layer 3 functions incl. L3L (please check Lantech software data sheet for details)
- **OS4 – R-NAT .....P/N: 9000-113**  
OS4 software platform with R-NAT function (please check Lantech software data sheet for details)

**M12 Connector & Cable****Connector**

- **ECONM12-04A(F)-C-180** 4 pin M12 (Female) A-coded 180 degree crimp type connector for power supply
- **ECONM12-08A(M)-180** 8 pin M12 (Male) A-coded 180 degree crimp type connector for reset/console/USB
- **ECONM12-05A(M)-C-180** 5 pin M12 (Male) A-coded 180 degree crimp type connector for DI/DO
- **ECONM12-08X(M)-SPEEDCON** 8 pin M12 (Male) X-coded 180 degree crimp type connector for data, Ethernet CAT6A (10G), shielded, SPEEDCON

**Cable**

- **ECONM12-4P(F)1.5M CABLE** 4 pin M12 (Female) A-coded 90 degree cable for power supply, 150cm
- **ECONM12-08M2-CONSOLE** 8 pin M12 (Male) A-coded 180 degree to RS232 cable for console, 150cm
- **ECABM12X83MSTP** 8 pin M12 (Male) X-coded 180 degree RJ45 STP cable for data, shielded, 300cm
- **ECABMO02-QOP2-3.0-MM-OM3** Q-ODC 2 plug/LC multi-mode fiber, MM-OM3, 300cm
- **ECABMO02-QOP2-3.0-SM-OS2** Q-ODC 2 plug/LC single-mode fiber, SM-OS2, 300cm

**Others**

- **M12 to USB interface adapter** 8 pin M12 (Male) A-coded 180 degree M12 to USB 2.0 interface adapter, 8cm
- **USB 2.0 Ethernet Adapter** USB 2.0 to RJ45 Ethernet Adapter
- **ECONM12-08(M) TO DB9+USB2.0-1.5M CABLE** 8 pin M12 (Male) A-coded 180 degree M12 to USB2.0 to DB9 (Female) cable, 150cm

**Lantech Communications Global Inc.**  
[www.lantechcom.tw](http://www.lantechcom.tw)  
[info@lantechcom.tw](mailto:info@lantechcom.tw)

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.