

EHG7512 EHG7516  
EHG7520 Series

## 12, 16 or 20-Port High-Bandwidth Industrial Managed Gigabit PoE Switch

### FEATURE HIGHLIGHTS



- Up to 16 10/100/1000 RJ45 ports or 100/1000 BASE-X SFP slots. Plus 4 dedicated 1/10G Uplink SFP slots
- Up to 8x 802.3af/ 802.3at PoE/PoE+ Power over Ethernet ports, with maximum 30W PoE power per port and up to 240W power budget
- 128 Gbps High-Performance non-blocking Switching Fabric
- Redundancy through ITU-T G.8032 ERPS Ring, RSTP, STP, MRP (Client)
- IEEE 1588v2 Precision Time Protocol HW-Based E2E Transparent clock
- Wide temperature operations, from -40°C to 70°C
- UL 62368-1:2014, CE/FCC, NEMA TS-2 certified for traffic control applications
- DNV-GL Marine Application
- Security features based on IEC62443-4-2

### PRODUCT DESCRIPTION

**Designed to be adaptive, with unprecedented throughput:** Atop's EHG7512/16/20 Series offers 24 different versions and 24 making it a very flexible product based on your specific needs. No matter if the 12, 16 or 20 port version, this device offers 4 x 1/10 Gigabit Ethernet SFP uplinks making it a cost-effective, reliable industrial solution where high-throughput and high-reliability is fundamental.

**Designed for PoE, in wide temperature:** EHG7512/16/20 supports *up to 20 Gigabit ports in different configurations*, either Copper, PoE or Fiber, any 8-port multiple configuration. Specifically designed for bringing power through Ethernet cable virtually anywhere, a **maximum output Power over Ethernet of 240W over a maximum of 8 PoE/PoE+ ports is allowed** (802.3af/at).

**Rugged, Wide-Temperature, Well protected design:** EHG7512/16/20 is EN61000-6-2, EN61000-6-4, IEC/EN/UL62368-1:2014 and FCC certified and is designed to withstand the harshest environments and the most demanding EMC environment. Its fanless design and EMC Level 3 protection guarantee reliable **operations within -40 and +70°C**, guaranteeing no packet is lost with all ports running full power and makes it suitable to be used for almost every application.

**Powerful and versatile:** With its high performance, its network redundant self-recovery mechanism is less than 20ms on full load that enables the user to build a reliable network through almost any redundant ring topology. EHG7512/16/20 supports ITU-T G.8032 ERPS Ring, IEEE802.1D-2004 RSTP, STP, MSTP, MRP (Client), iA-Ring, iA-Chain and many compatible rings protocols for network redundancy. With a Multifunctional web dashboard, it offers intelligent features such as Quality of service (QoS) per port or per VLAN, VLAN, IGMP, Port mirroring and security. To prevent network intrusions, it is necessary to have a good access control mechanism that can identify, authenticate and authorize users. EHG7512/16/20 support user account, password policy, and authentication interface managements functions that comply with IEC62443 standard.


**Application-Specific:** NEMA TS-2 Certification makes EHG7512/16/20 family the perfect choice for Smart City and Traffic Control applications.

## SPECIFICATIONS

Technical Specifications		
Model Name	EHG7512 (12 ports) ; EHG7516 (16 ports); EHG7520 (20 ports)	
Switch Properties		
Priority Queues	8	
VLAN Table	4096	
MAC-Based VLAN	512	
VLAN ID Range	VID 1 to 4094	
Trunk Group	4	
Static IGMP Groups	128	
Dynamic IGMP Groups	256	
MAC Table Size	16K	
Packet Buffer Size	1.5 MB	
Jumbo Frame	9216 Byte	
Ethernet		
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3ae For 10 Gigabit Ethernet Fiber IEEE 802.3x for Flow Control, back pressure flow control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1p for Class of Service IEEE 802.1X for Authentication IEEE 802.3ad for Port Trunk with LACP IEEE 802.3az for Energy Efficient Ethernet	
Protocols	IPv4, IPv6, IGMPv1/v2/v3, IGMP Snooping, GARP, GMRP, GVRP, SNMPv1/v2c/v3, SNMP Inform, ICMP, Telnet, SSH, DHCP Relay/Client, BootP, TFTP, SMTP, SMTP (Gmail), RMON, HTTP, HTTPS, Syslog, MRP (Client), LLDP, 802.1x, EAP, RADIUS, TACACS+, Mirror port, QoS, ACL, ITU-T G.8032 ERPS Ring, STP, RSTP, MSTP, Compatible Ring/Chain, U-Ring, NTP Server/Client, Serial Console, Modbus/TCP, IEEE 1588 PTP V1/V2, UDLD, Security, Trunk, LACP, MLD, 802.1Q VLAN, Port-Based VLAN, MAC-Based VLAN, IP-Subnet-Based VLAN, Protocol-Based VLAN, QinQ, 802.1x, ARP spoof Prevention, DHCP snooping, IP source Guard, Dynamic ARP Inspection, DHCP relay Agent	
Redundancy	ITU-T G.8032 ERPS Ring, STP, RSTP, MSTP, Compatible Ring/Chain, U-Ring	
Time Synchronization	Network Synchronization	NTP Server/Client, SNTP
	Precision Network Synchronization	IEEE1588v1 OC/BC (Software) IEEE1588v2 E2E TC (Hardware) - ns acc. IEEE1588v2 OC/BC (Software)
Automation Profiles	Modbus/TCP device status registers provided	
SNMP MIB	MIB II, IF-MIB, SNMPv2 MIB, BRIDGE-MIB, RMON MIB Group 1,2,3,9, RFC RFC 1157, RFC 1213, RFC 1215, RFC 1493, RFC 1643, RFC 1757, RFC 2011, RFC 2012, RFC 2013, RFC 2233, RFC 2571, RFC 2742, RFC 2819, RFC 2863, RFC 3411, RFC 3412, RFC 3413, RFC 3414, RFC 3415, RFC 2674	
Power		
Input Voltage	9-57 VDC for Non-PoE models 45-57 VDC for 802.3af mode 51-57 VDC for 802.3at mode	

Input Current (System)	Max. 2.2 A @ 12 VDC (without PoE) Max. 3.3 A @ 45 VDC (Support up to 8 ports at 15.4W per PoE port) Max. 5.2 A @ 51 VDC (Support up to 8 ports at 30W per PoE port)
Power Consumption (System)	Max. 26.4 W @ 12 VDC (without PoE) Max. 148.5 W @ 45 VDC (Support up to 8 ports at 15.4W per PoE port) Max. 265.2 W @ 51 VDC (Support up to 8 ports at 30W per PoE port)
Connector Reverse Polarity Protection	5-Pin 5.08mm Lockable Terminal Block Yes
<b>Interfaces</b>	
RJ45 Ports Fiber Optics Ports LED Indicators Console Relay Output DIP Switches Button	Up to 16 10/100/1000BASE-T(X) auto negotiation speed Up to 16 100/1000BASE-X SFP slot plus 4 1000BASE-X or 4 10G SFP slots PWR1, PWR2, Alarm, Run, Ring, Ring Master, RJ-45 Link/Speed, SFP Link, PoE RS232 (RJ45 connector) 2 relay outputs with current carrying capacity of 1A @ 24 VDC Ring Control and Profinet Setting Reset Button
<b>Physical Characteristics</b>	
Housing Dimension (W x H x D) Weight Installation	IP30 SPCC Metal housing, ruggedized Heat-sink EHG7512: 76 x 200 x 160 mm; EHG7516-EHG7520: 95 x 200 x 160 mm 2,500 g DIN-Rail, Wall mount (optional kit)
<b>Environmental Limits</b>	
Operating Temperature Storage Temperature Ambient Relative Humidity	-40°C~70°C (-40°F~158°F) -40°C~85°C (-40°F~185°F) 5%~95%, 55°C (Non-condensing)

## DIMENSIONS & LAYOUT

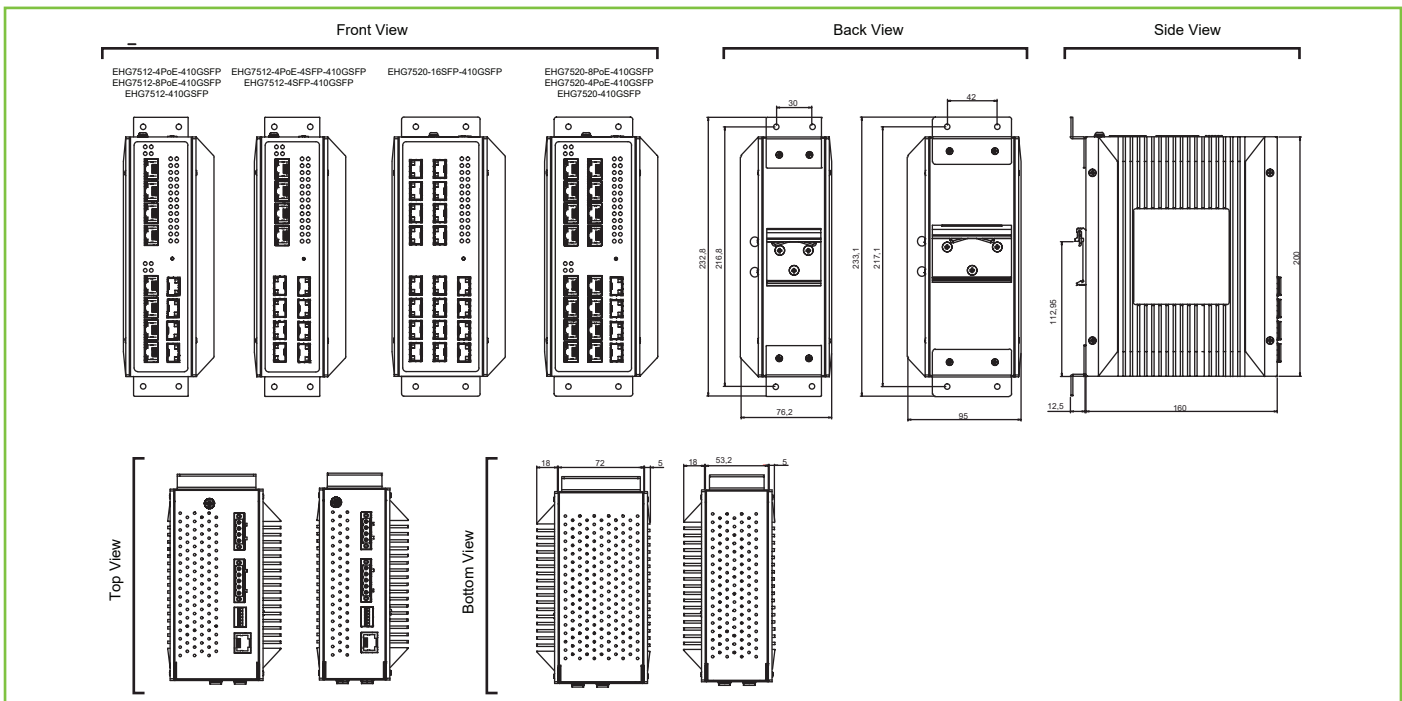

## REGULATORY APPROVALS

Regulatory Approvals				
Safety	UL62368-1, 2nd Ed., CSAC22.2 N. 62368-1-14,NZS62368.1:2018,EN62368-1:2014+A11:2017			
Traffic Control	NEMA TS-2			
EMC	FCC Part 15, Subpart B, Class A EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4,			
DNVGL Maritime	DNV-GL			
Test	Item	Value	Level	
IEC 61000-4-2	ESD	Contact Discharge	±6kV	3
		Air Discharge	±8kV	3
IEC 61000-4-3	RS	80-1000MHz	10(V/m)	3
		1.4-2.0GHz	3(V/m)	3
		2.0-2.7GHz	10(V/m)	3
IEC 61000-4-4	EFT	AC Power Port	±2.0kV	3
		DC Power Port	±2.0kV	3
		Signal Port	±1.0kV	3
IEC 61000-4-5	Surge	DC Power Port	Line-to Line±1.0kV	3
		DC Power Port	Line-to Earth±2.0kV	3
		Signal Port	Line-to Earth±2.0kV	3
IEC 61000-4-6	CS	0.15-80MHz	10V rms	3
IEC 61000-4-8	PFMF	Enclosure	30 V/m	4
IEC 61000-4-11	DIP	AC Power Port	-	A
Shock Drop Vibration	MIL-STD-810G Method 516.5 MIL-STD-810F Method 516.5 MIL-STD-810F Method 514.5 C-1 & C-2			
RoHS II	Yes			
MTBF	20 Years			

## ORDERING INFORMATION

Ordering information						
Model name	Part Number	10/100/ 1000 RJ45 (non-PoE)	10/100/ 1000 RJ45 (PoE)	100/1000 SFP slots	1000 SFP slots	10G SFP slots
EHG7512-410GSFP	1P1EHG75120002G	8	-	-	-	4
EHG7512-4SFP-410GSFP	1P1EHG75120004G	4	-	4	-	4
EHG7516-410GSFP	1P1EHG75160001G	12	-	-	-	4
EHG7516-4SFP-410GSFP	1P1EHG75160004G	8	-	4	-	4
EHG7516-8SFP-410GSFP	1P1EHG75160007G	4	-	8	-	4
EHG7516-12SFP-410GSFP	1P1EHG75160009G	-	-	12	-	4
EHG7520-410GSFP	1P1EHG75200001G	16	-	-	-	4
EHG7520-4SFP-410GSFP	1P1EHG75200004G	12	-	4	-	4
EHG7520-8SFP-410GSFP	1P1EHG75200007G	8	-	8	-	4
EHG7520-12SFP-410GSFP	1P1EHG75200008G	4	-	12	-	4
EHG7520-16SFP-410GSFP	1P1EHG7520000AG	-	-	16	-	4
EHG7512-4PoE-410GSFP	1P1EHG75120003G	4	4	-	-	4
EHG7512-4PoE-4SFP-410GSFP	1P1EHG75120005G	-	4	4	-	4
EHG7512-8PoE-410GSFP	1P1EHG75120001G	-	8	-	-	4
EHG7516-4PoE-410GSFP	1P1EHG75160002G	8	4	-	-	4
EHG7516-4PoE-4SFP-410GSFP	1P1EHG75160005G	4	4	4	-	4
EHG7516-4PoE-8SFP-410GSFP	1P1EHG75160008G	-	4	8	-	4
EHG7516-8PoE-410GSFP	1P1EHG75160003G	4	8	-	-	4
EHG7516-8PoE-4SFP-410GSFP	1P1EHG75160006G	-	8	4	-	4
EHG7520-4PoE-410GSFP	1P1EHG75200002G	12	4	-	-	4
EHG7520-4PoE-4SFP-410GSFP	1P1EHG75200005G	8	4	4	-	4
EHG7520-4PoE-12SFP-410GSFP	1P1EHG75200009G	-	4	12	-	4
EHG7520-8PoE-410GSFP	1P1EHG75200003G	8	8	-	-	4
EHG7520-8PoE-4SFP-410GSFP	1P1EHG75200006G	4	8	4	-	4
EHG7512-4PoE-4SFP-410GSFP (Marine)	1P1EHG75120006G	-	4	4	-	4
EHG7516-8PoE-410GSFP (Marine)	1P1EHG7516000AG	4	8	-	-	4

## Optional Accessories

Model name	Part Number	Description
WMK-450-Black	70100000000052G	Aluminum wall mount kit
CBL-RJ45(8P)-DB9(F)-90-C	50891971G	RJ45 to DB9 Female Cross Over Console Cable, 90cm
SDR-75-24	50500752240001G	75W/3.2A DIN-Rail 24VDC power supply 88~264VAC / 124~370VDC input
SDR-240-48	50502401480001G	240W/5A DIN-Rail 48~55VDC power supply 88~264VAC / 124~370VDC input
SDR-480-48	50504801480001G	480W/10A DINRail 48~55VDC power supply 88~264VAC /124~370VDC input
LM38-A3S-TI-N	50708051G	SFP Transceiver, 155Mbps, 1310nmLED, Multi-mode, 2km, 3.3V, -40~85°C
LS38-A3S-TI-N	50709431G	SFP Transceiver, 155Mbps, 1310nmFP, Single-mode, 30km, 3.3V, -40~85°C
LM28-C3S-TI-N	50708031G	SFP Transceiver, 1250Mbps, 850nmVCSEL, Multi-mode, 550m, 3.3V, -20~85°C
LM38-C3S-TI-N	50709411G	SFP Transceiver, 1250Mbps, 1310nmFP, Multi-mode, 2km, 3.3V, -40~85°C
LS38-C3S-TI-N	50709391G	SFP Transceiver, 1250Mbps, 1310nmFP, Single-mode, 10km, 3.3V, -40~85°C
LS38-C3L-TI-N	50709441G	SFP Transceiver, 1250Mbps, 1310nmDFB, Single-mode, 30km, 3.3V, -40~85°C
LM28-H3S-TI-N	50710061G	SFP Transceiver, 10Gbps, 851nmVCSEL, Multi-mode, 3.3V, 33m/82 m, -10~85°C

Industrial Communication Products Ltd

Tel: +44(0) 203 086 9569

Web: [www.industrialcomms.com](http://www.industrialcomms.com)

Email: [sales@industrialcomms.com](mailto:sales@industrialcomms.com)