

EKI-2525M/S

4+1 100FX Port Unmanaged Industrial Ethernet Switch



Features

- ③ Provides 4 x 10/100 Mbps Ethernet ports with RJ45 connector
- ③ Provides 1 x 100 Mbps Multi-mode SC type fiber optic port (EKI-2525M)
- ③ Provides 1 x 100 Mbps Multi-mode ST type fiber optic port (EKI-2525M-ST)
- ③ Provides 1 x 100 Mbps Single-mode SC type fiber optic port (EKI-2525S)
- ③ Supports full/half duplex flow control
- ③ Supports MDI/MDI-X auto crossover
- ③ Provides broadcast storm protection
- ③ Provides redundant 12 ~ 48 V_{DC} power input
- ③ Provides flexible mounting: DIN-rail and Wall mount

Introduction

EKI-2525M/2525S are industrial-grade Ethernet switches that enable you to expand your industrial network fast and cost-effectively. The EKI-2525M/2525S have four 10/100 Mbps Ethernet ports, and additionally the EKI-2525M provides one multi-mode fiber-optic ports, while the EKI-2525S provide one single-mode fiber-optic ports. Using fiber-optics, you can prevent noise from interfering with your system and supports high-speed (100 Mbps) and high-distance (up to 30 km) transmissions.

EKI-2525M/2525S have industrial-grade designs, assuring high reliability and stability in harsh environments, making it a robust bridge between enterprise fiber-optic backbones and Ethernet devices. EKI-2525M/2525S includes a switch controller that can automatically sense transmission speeds. The RJ45 interface can also be autodetected, so MDI or MDI-X is automatically selected and a crossover cable is not required. All the Ethernet ports have memory buffers that support the store and forward mechanism, assuring all data is transmitted properly.

Specifications

Communications

- ③ **Standard** IEEE 802.3, 802.3u, 802.3x
- ③ **LAN** 10/100Base-T (X), 100Base-FX
- ③ **Transmission Distance** Ethernet: Up to 100 m
Multi-mode Fiber: Up to 2 km (EKI-2525M)
Single-mode Fiber: Up to 30 km (EKI-2525S)
- ③ **Transmission Speed** Up to 100Mbps

Optical Fiber

- ③ **Multi-Mode** (EKI-2525M) Wavelength: 1310nm
Tx Power: -14/-20 dBm
Rx Sensitivity: -31 dBm
Parameters: 50/125 um, 62.5/125 um
- ③ **Single-Mode** (EKI-2525S) Wavelength: 1310 nm
Tx Power: -8/-15 dBm
Rx Sensitivity: -34 dBm
Parameters: 9/125 um

Interface

- ③ **Connectors** 4 x RJ45 ports
1 x SC type fiber connector (EKI-2525M/S) or
1 x ST type fiber connector (EKI-2525M-ST)
6-pin removable screw terminal (Power & Relay)
- ③ **LED Indicators** P1, P2, P-Fail
10/100TX: Link/Activity, Duplex/Collision

Power

- ③ **Power Consumption** Max. 5 W
- ③ **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- ③ **Fault Output** 1 Relay Output

Mechanism

- ③ **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.52" x 3.74")
- ③ **Enclosure** IP30, Metal shell with solid mounting kits
- ③ **Mounting** DIN-rail, Wall

Protection

- ③ **Reverse Polarity** Present
- ③ **Overload Current** Present


Environment

- ③ **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- ③ **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- ③ **Operating Humidity** 10 ~ 95% (non-condensing)
- ③ **Storage Humidity** 10 ~ 95% (non-condensing)
- ③ **MTBF** 382,904 hours

Dimensions

Unit: mm

EKI-2525M/S

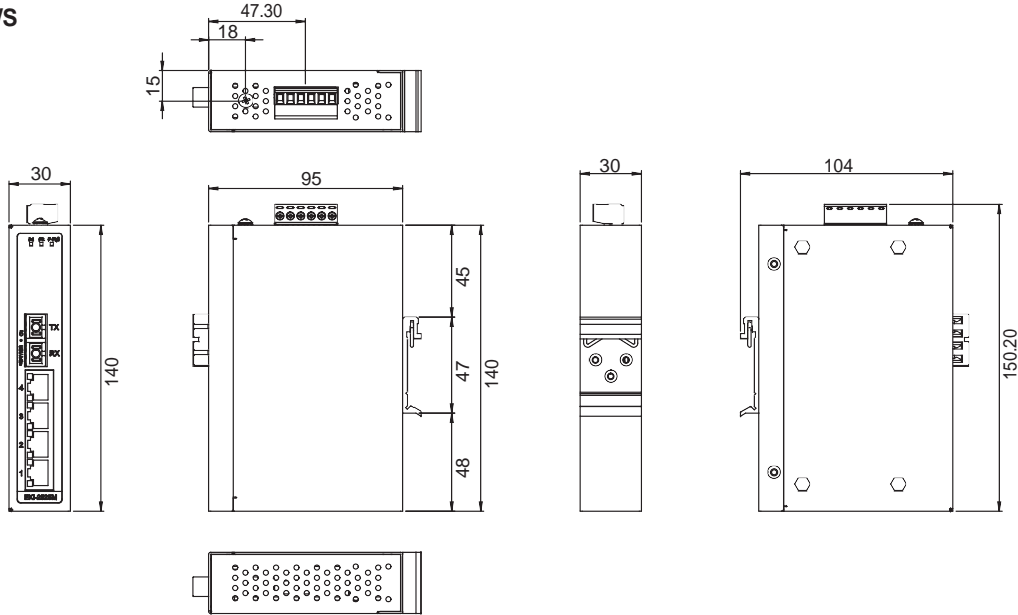

Panel Cut-out Dimensions: 104 x 140 x 30 mm (4.1" x 5.51" x 1.18")

Certification

| | | |
|---|------------------|--|
| ③ | Safety | EKI-2525M-ST/EKI-2525S: UL/cUL 60950 |
| | | EKI-2525M: UL/cUL 60950 Class I, Division 2, Groups A, B, C and D |
| ③ | EMs | EMI FCC Part 15 Subpart B Class A, EN55022 |
| ③ | Shock | EN 61000-4-2, EN 61000-4-3, EN 61000-4-4 EN 61000-4-5, EN 61000-4-6, EN 61000-4-8 |
| ③ | Freefall | IEC60068-2-27 |
| ③ | Vibration | IEC60068-2-32 IEC60068-2-6 |

Ordering Information

| | | |
|---|------------------------|---|
| ③ | EKI-2525M-BE | 4-port Ethernet Switch w/ 1-port 100FX Multi-mode |
| ③ | EKI-2525M-ST-BE | 4-port Ethernet Switch w/ 1-port 100FX Multi-mode (ST type connector) |
| ③ | EKI-2525S-AE | 4-port Ethernet Switch w/ 1-port 100FX Single-mode |