

EKI-5624P

EKI-5624PI

4FE with PoE+2GE Industry Ethernet Proview PoE Switch



Features

- ③ 4 x IEEE 802.3af/at-compliant fast Ethernet ports
- ③ PoE standard + 2 x Gigabit Ethernet ports
- ③ Communicates with SCADA software via Modbus/TCP
- ③ Communicates with NMS via SNMP
- ③ Port-based QoS for deterministic data transmission
- ③ Wide operating temperature range of -40 ~ 60°C (EKI-5624PI)
- ③ EMS Level 3 protection for extreme outdoor environments
- ③ IEEE 802.3az Energy-Efficient Ethernet
- ③ Jumbo frame support (up to 9,216 Bytes)
- ③ Supports redundant 12 ~ 24 V (9 ~ 36 V) power input and P-Fail relay
- ③ Loop detection

Introduction

The EKI-5624P and EKI-5624PI support PoE on Ports 1 ~ 4 and are classified as power source equipment. They are the world's first convergence switches for process control and IT networking management. This series use Modbus/TCP to communicate with SCADA software and SNMP to communicate with NMS simultaneously, thereby allowing full read control over devices for either control engineers or for IT personnel. The switches come with port-based QoS for deterministic data transmission, enabling specific ports to prioritize traffic and delay less important data over the remaining ports. The switches use the highest quality components and can operate at temperatures of -40 ~ 75°C while also possessing EMS Level 3 protection against electromagnetic interference. The switches comply with E-mark for in-vehicle applications and surveillance systems.

Specifications

③ **Switching Capacity** 4.8 Gbps

Communications

- ③ **Standard** IEEE 802.3af/at, 802.3, 802.3u, 802.3ab, 802.3az, 802.3x, 802.1p
- ③ **LAN** 10/100BASE-TX, 10/100/1000BASE-TX
- ③ **Transmission Distance** Up to 100 m
- ③ **Transmission Speed** Up to 1000 Mbps

Interface

- ③ **Connectors** 4 x 10/100BASE-TX with PoE +2 x 10/100/1000BASE-TX 6-pin removable screw terminal (power & relay)

LED Indicators

- ③ **System LED** P1, P2, P-Fail, Loop, PoE
- ③ **Port LED status** 10/100BASE-TX or 10/100/1000BASE-TX: LNK/ACT, Speed, PoE port

Physical

- ③ **Enclosure** Metal/Aluminum Shell with solid mounting kits
- ③ **Protection Class** IP30
- ③ **Installation** DIN-Rail and Wall-Mount
- ③ **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.913 x 5.984 x 4.137) inch

Environment

- ③ **Operating Temperature** Wide Temp Models: -40 to 75°C (-40 to 167°F)
Standard Models: -25 to 60°C (-4 to 140°F)
- ③ **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- ③ **Relative Humidity** 10 ~ 95% (non-condensing)

Switch Properties

- ③ **MAC Address** 2K entries
- ③ **Packet Buffer** 1Mbit

*Class 1 Division 2, * IECEx, *ATEX
EMC CE, FCC, e-Mark
 EN 55011/55022 Class A, EN 61000-6-4,
 FCC Part 15 Subpart B Class A
EMS
 EN55024/EN61000-6-2
 EN 61000-4-2 (ESD) Level 3
 EN 61000-4-3 (RS) Level3;
 EN 61000-4-4 (EFT) Level 3
 EN 61000-4-5 (Surge) Level 3;
 EN 61000-4-6 (CS) Level 3
 EN 61000-4-8 (Magnetic Field) Level 3
 IEC 60068-2-27
Freefall IEC 60068-2-32
Vibration IEC 60068-2-6
Patent
<http://www.advantech.com/legal/patent>

Power

- ③
- ③
- ③

Power Consumption 4.2w (System)
Power Input 12-24 Vdc, (7A-3A)
Power Budget
 6
 0w @
 24v
 50w @
 12v

Certification

- ③


Safety IEC/EN 60950, UL61010-2-201,

- ③ **EMI**
- ③ **EMS**
- ③ **Shock**
- ③
- ③
- ③

Industrial Ethernet Solutions

Dimensions

Unit: mm[inch]

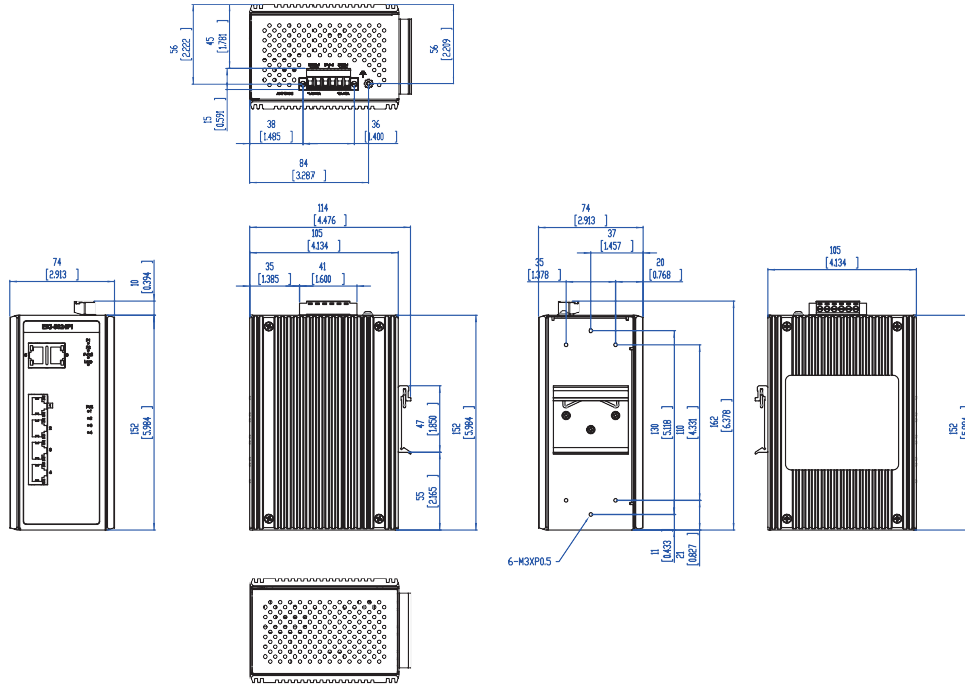

Ordering Information

- ③ **EKI-5624P** 4 x 10/100BASE-TX with PoE + 2GE , -25 to 60°C operating temperature
- ③ **EKI-5624PI** 4 x 10/100BASE-TX with PoE + 2GE , -40 to 65°C operating temperature