


RUGGEDCOM RSG2300

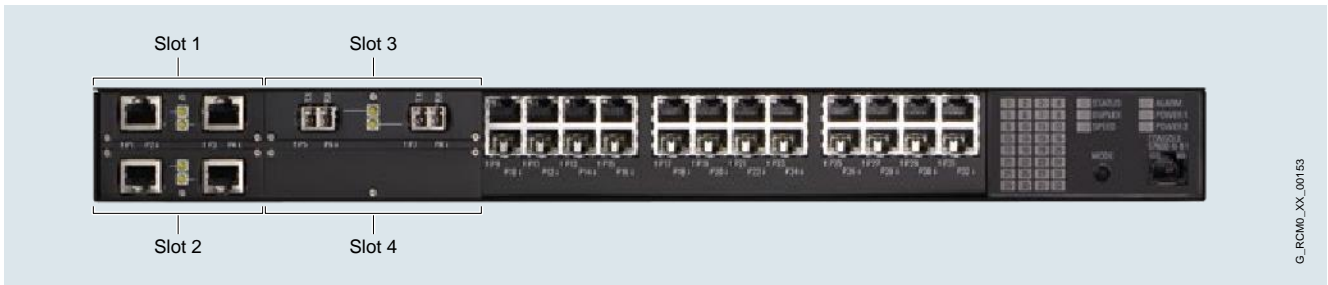

G_RCM0_XX_00153

Product	Article number								
RUGGEDCOM RSG2300	6GK6023-0AS2	.	-	-	Z
Power supply 1									
24 VDC (10 - 36 VDC) with screw terminal block		1							
48 VDC (36 - 72 VDC) with screw terminal block		2							
88 - 300 VDC / 85 - 264 VAC with screw terminal block		3							
24 VDC (10 - 36 VDC) with pluggable terminal block		4							
48 VDC (36 - 72 VDC) with pluggable terminal block		5							
88 - 300 VDC / 85 - 264 VAC with pluggable terminal block		6							
Power supply 2 (terminal block must be equal to power supply 1)									
No power supply 2								0	
24 VDC (10 - 36 VDC) with screw terminal block								1	
48 VDC (36 - 72 VDC) with screw terminal block								2	
88 - 300 VDC / 85 - 264 VAC with screw terminal block								3	
24 VDC (10 - 36 VDC) with pluggable terminal block								4	
48 VDC (36 - 72 VDC) with pluggable terminal block								5	
88 - 300 VDC / 85 - 264 VAC with pluggable terminal block								6	
Mounting options									
No mounting option									A
19" rack mounting kit									D
DIN/rail and panel mounting kit									E
19" rack, DIN/rail and panel mounting kit									F
Connections									
Ethernet interfaces on rear; LED panel on front; power connector on rear									B
Ethernet interfaces on front; LED panel on front; power connector on rear									C
Ethernet interfaces on rear; LED panel on top; power connector on rear									D
Ethernet interfaces on front; LED panel on top; power connector on rear									E
Manufacturing modification									
Standard									0
Conformal coating									1

Examples	Order code
RUGGEDCOM RSG2300 with 2 x 48 VDC with screw terminal block power supplies, 19" rack mounting kit, Ethernet connectors on rear; LED panel on front; power connector on rear; + 28 x 10/100BASE-TX RJ45 + 4 x 1000BASE-LX, single-mode, 70 km SFP	6GK6023-0AS13-3DB0-Z A01+ B01+ C11+ D11

Z options	Slot 1	Slot 2
No module	A00	B00
2 x 10/100BASE-TX RJ45	A01	B01
2 x 10BASE-FL, multi-mode, 850 nm, ST	A02	B02
2 x 100BASE-FX, multi-mode, 1300 nm, ST	A03	B03
2 x 100BASE-FX, multi-mode, 1300 nm, SC	A04	B04
2 x 100BASE-FX, multi-mode, 1300 nm, LC	A05	B05
2 x 100BASE-FX, multi-mode, 1300 nm, MTRJ	A06	B06
2 x 100BASE-FX, single-mode, 1310 nm, ST, 20 km	A07	B07
2 x 100BASE-FX, single-mode, 1310 nm, SC, 20 km	A08	B08
2 x 100BASE-FX, single-mode, 1310 nm, LC, 20 km	A09	B09
2 x 100BASE-FX, single-mode, 1310 nm, SC, 50 km	A10	B10
2 x 100BASE-FX, single-mode, 1310 nm, LC, 50 km	A11	B11
2 x 100BASE-FX, single-mode, 1310 nm, SC, 90 km	A12	B12
2 x 100BASE-FX, single-mode, 1310 nm, LC, 90 km	A13	B13

Z options	Slot 3	Slot 4
No module	C00	D00
2 x 10/100/1000BASE-TX RJ45	C01	D01
2 x 1000BASE-SX, multi-mode, 850 nm, LC, 500 m	C02	D02
2 x 1000BASE-LX, single-mode, 1310 nm, SC, 10 km	C03	D03
2 x 1000BASE-LX, single-mode, 1310 nm, LC, 10 km	C04	D04
2 x 1000BASE-LX, single-mode, 1310 nm, SC, 25 km	C05	D05
2 x 1000BASE-LX, single-mode, 1310 nm, LC, 25 km	C06	D06
2 x 1000BASE-LX SFP, blank (no optical transceiver)	C07	D07
2 x 1000BASE-SX SFP, multi-mode, 850 nm, LC, 500 m (Incl. 2 x SFP1122-1SX)	C08	D08
2 x 1000BASE-LX SFP, single-mode, 1310 nm, LC, 10 km (Incl. 2 x SFP1132-1LX10)	C09	D09
2 x 1000BASE-LX SFP, single-mode, 1310 nm, LC, 25 km (Incl. 2 x SFP1132-1LX25)	C10	D10
2 x 1000BASE-LX SFP, single-mode, 1550 nm, LC, 70 km (Incl. 2 x SFP1132-1LX70)	C11	D11
2 x 1000BASE-LX GBIC, blank (no optical transceiver)	C12	D12
2 x 1000BASE-LX GBIC, single-mode, 1310 nm, SC, 10 km	C13	D13
2 x 1000BASE-LX GBIC, single-mode, 1310 nm, SC, 25 km	C14	D14
2 x 1000BASE-LX GBIC, single-mode, 1550 nm, SC, 70 km	C15	D15
2 x 100BASE-FX, multi-mode, 1300 nm, ST	C16	D16
2 x 100BASE-FX, multi-mode, 1300 nm, SC	C17	D17
2 x 100BASE-FX, multi-mode 1300 nm, LC	C18	D18
2 x 100BASE-FX, multi-mode 1300 nm, MTRJ	C19	D19
2 x 100BASE-FX, single-mode 1310 nm, ST, 20 km	C20	D20
2 x 100BASE-FX, single-mode 1310 nm, SC, 20 km	C21	D21
2 x 100BASE-FX, single-mode 1310 nm, LC, 20 km	C22	D22
2 x 100BASE-FX, single-mode 1310 nm, SC, 50 km	C23	D23
2 x 100BASE-FX, single-mode 1310 nm, LC, 50 km	C24	D24
2 x 100BASE-FX, single-mode, 1310 nm, SC, 90 km	C25	D25
2 x 100BASE-FX, single-mode 1310 nm, LC, 90 km	C26	D26
2 x 1000BASE-TX, SFP, RJ45 (Incl. 2 x SFP1112-1)	C27	D27