


RUGGEDCOM RX1501

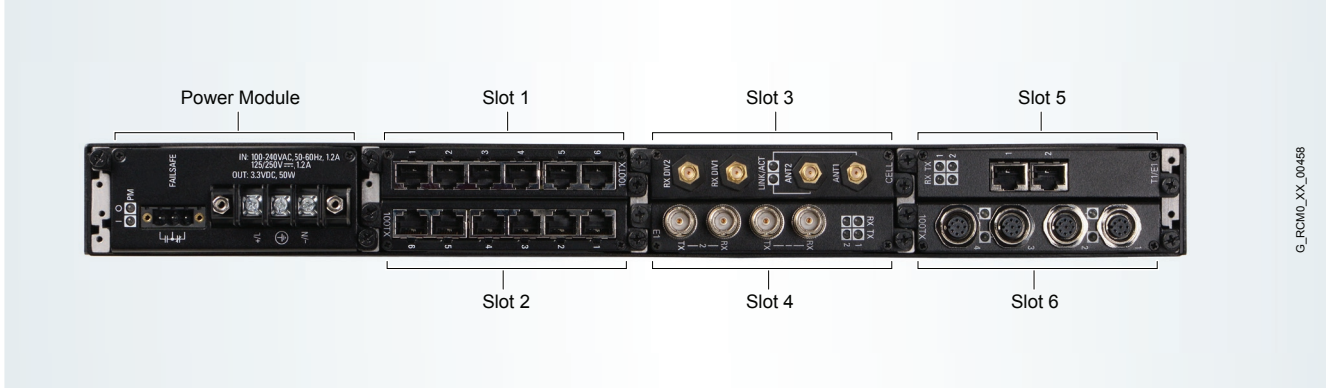

G_RCM10_XX_00458

Product	Article number								
RUGGEDCOM RX1501	6GK6015-0BM2	.	-	0	.	.	.	-	Z
Power module (PM)									
No power module			0						
24 VDC (15-36 VDC) with screw terminal block			1						
48 VDC (36-72 VDC) with screw terminal block			2						
High voltage (88-300 VDC / 85-264 VAC) with screw terminal block			3						
24 VDC (15-36 VDC) with pluggable terminal block			4						
48 VDC (36-72 VDC) with pluggable terminal block			5						
High voltage (88-300 VDC / 85-264 VAC) with pluggable terminal block			6						
12 VDC (9-15 VDC) with screw terminal block			7						
12 VDC (9-15 VDC) with pluggable terminal block			8						
Mounting options									
No mounting option							A		
19" rack mounting kit							D		
DIN and panel mounting kit							E		
Switching hardware									
Layer 2 switch							B		
Layer 3 switch							C		
Manufacturing modification									
None								0	
Conformal coating								1	

Example	Order code
RUGGEDCOM RX1501 with high voltage (88-300 VDC / 85-264 VAC) power supply with pluggable terminal block, 19" rack mounting option, Layer 2 switch, conformal coating, Layer 2 standard edition, 2 x 1000BASE-LX, single-mode, 1300 nm. LC, 10 km, 6 x 10/100BASE-TX RJ45, 6 x 100BASE-FX SFP, blank (no transceiver) and three blank modules.	6GK6015-0BM26-0DB1-Z A00 + B33 + C01 + D09 + E00 + F00 + G00

Z options for software	
Layer 2 standard edition	A00
Layer 3 standard edition (only with Layer 3 hardware)	A01
Layer 3 standard edition (only with Layer 2 hardware)	A02
Layer 3 security edition (only with Layer 3 hardware)	A03
Layer 3 security edition (only with Layer 2 hardware)	A04

Z options	Slot 1	Slot 2	Slot 3	Slot 4	Slot 5	Slot 6
Blank module	B00	C00	D00	E00	F00	G00
6 x 10/100BASE-TX RJ45	B01	C01	D01	E01	F01	G01
2 x 10/100/1000BASE-TX RJ45	B02	C02				
6 x Serial RS232 / RS422 / RS485 with RJ45	B03	C03	D02	E02	F02	G02
3 x 10BASE-FL / 100BASE-SX, multi-mode, 850 nm, ST, 2 km	B15	C15	D03	E03	F03	G03
4 x 100BASE-FX, multi-mode, 1300 nm, LC, 2 km	B16	C16	D04	E04	F04	G04
4 x 100BASE-FX SFP, blank (no optical transceiver)	B21	C21	D09	E09	F09	G09
4 x 100BASE-FX SFP multimode 1310 nm LC 2km	B22	C22	D10	E10	F10	G10
6 x 100BASE-FX SFP, blank (no optical transceiver)	B26	C26	D14	E14	F14	G14
6 x 100BASE-FX SFP multimode 1310 nm LC 2km	B27	C27	D15	E15	F15	G15
2 x 1000BASE-LX, single-mode, 1300 nm, LC, 10 km	B33	C33				
2 x 1000BASE-LX SFP, blank (no optical transceiver)	B36	C36				
2 x 1000BASE-SX SFP multimode 850 nm LC 500m	B37	C37				
1 x T1/E1 RJ48 (channelized/unchannelized)	B41	C41	D19	E19	F19	G19
2 x T1/E1 RJ48 (channelized/unchannelized)	B42	C42	D20	E20	F20	G20
4 x T1/E1 RJ48 (channelized/unchannelized)	B43	C43	D21	E21	F21	G21
2 x E1 (75 Ohm) BNC (channelized/unchannelized)	B45	C45	D23	E23	F23	G23
1 x Cellular (GSM/EDGE/HSPA)	B46	C46	D24	E24	F24	G24
2 x Cellular (GSM/EDGE/HSPA)	B47	C47	D25	E25	F25	G25
1 x Cellular (EVDO rev. A, Verizon USA)	B48	C48	D26	E26	F26	G26
2 x Cellular (EVDO rev. A, Verizon USA)	B49	C49	D27	E27	F27	G27
2 x Cellular (GSAM/EDGE/HSPA/EVDO rev. A, Verizon USA)	B50	C50	D28	E28	F28	G28
1 x DDS RJ48 (56K Master/Slave 64K slave)	B51	C51	D29	E29	F29	G29
2 x 10/100/1000BASE-TX M12 (8-pin)	B57	C57				
4 x 10/100BASE-TX M12 (8-pin)	B58	C58	D36	E36	F36	G36
4 x 10/100BASE-TX M12 (4-pin)	B59	C59	D37	E37	F37	G37
2 x 10/100/1000BASE-TX M12 with controlled bypass (8-pin)	B60	C60				
4 x 10/100BASE-TX M12 with controlled bypass (8-pin)	B61	C61	D61	E61	F61	G61
4 x 10/100BASE-TX M12 with controlled bypass (4-pin)	B62	C62	D62	E62	F62	G62
2 x 10/100/1000BASE-TX M12 (8-pin, X-coded)	B63	C63				
2 x 10/100/1000BASE-TX M12 with controlled bypass (8-pin, X-coded)	B64	C64				
1 x 4G/LTE for usage in European Union (EU)	B65	C65	D65	E65	F65	G65
1 x 4G/LTE for usage in USA & Canada (AT&T/Rogers/Telus/Bell)	B66	C66	D66	E66	F66	G66
1 x 4G/LTE for usage in USA (Verizon)	B67	C67	D67	E67	F67	G67
1 x 4G/LTE for usage in Asia Pacific	B68	C68	D68	E68	F68	G68
2 x APE1808LNX (Atom x5-E3940, 8GB RAM, 64GB eMMC, DisplayPort, uSD, USB, Linux)	B72	C72	D72	E72	F72	G72
2 x APE1808W10 (Atom x5-E3940, 8GB RAM, 64GB eMMC, DisplayPort, uSD, USB, Windows 10)	B73	C73	D73	E73	F73	G73
2 x APE1808ADM (Atom x5-E3940, 8GB RAM, 64GB eMMC, DisplayPort, uSD, USB, CROSSBOW ADM agent software)	B75	C75	D75	E75	F75	G75
1 x 3G/LTE North America (AT&T, Verizon, Rogers, Bell, Telus)	B80	C80	D80	E80	F80	G80