

24VDC PLUG-IN ELECTRONIC POWER SUPPLY FOR SLIMEDGE™ AND LARC6 FIXTURES ONLY



PRODUCT DESCRIPTION

A 24VDC constant voltage, 12W and 24W power supply that is especially suitable for GM Lighting LED SlimEdge and LARC6 undercabinet LED fixtures. 60" cord and 2-prong plug.

NOTE: If using the SlimEdge or LARC6 touch dimmer (TD), you must use these power supplies only.


PROJECT CATALOG NUMBER (FOR CUSTOM LENGTHS, PLEASE SEE ORDERING EXAMPLE BELOW)

- For SlimEdge and LARC6 fixtures
- 24VDC constant voltage output
- 120V input
- Plug-in
- Cooling by air convection

LABEL

• UL

WARRANTY

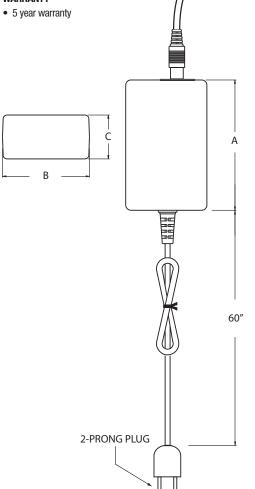







KEY TO DIMENSIONS

Catalog No.	Α	В	С
DPPS-12-24	4.25"	2"	1.5"
DPPS-36-24	4.25"	2"	1.5"

ORDERING INFORMATION

Catalog No.	Wattage	Input	Output	Rated Current	Weight	Warranty
DPPS-12-24	12W	120VAC	12VDC	0.5A	8 oz.	5 years
DPPS-36-24	36W	120VAC	36VDC	1.5A	8 oz.	5 years