




UNLIMITED POSSIBILITIES: (2 ft & 4 ft Standard Layouts)

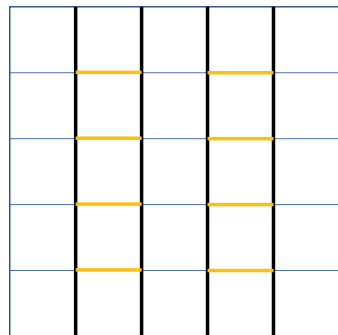


Typical layout 2FT
(Individual)

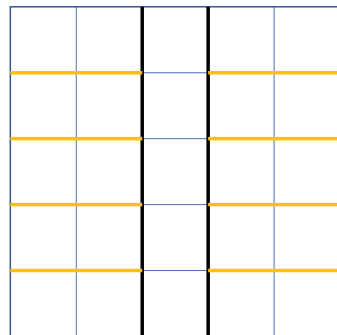

Typical layout 4FT
(Individual)

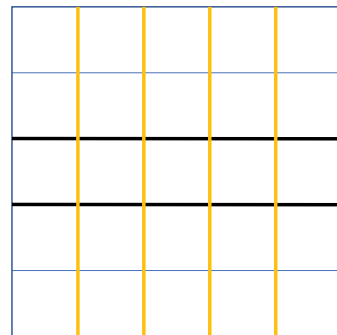

Typical layout 2FT & 4FT
(Continuous)

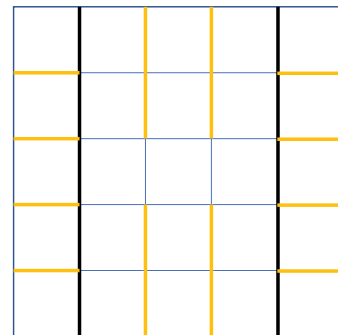

Typical layout 2FT & 4FT
(Pattern)

Note:  GridTask Lights
 Ceiling Main Beams



www.gmlighting.net

18700 Ridgeland Ave, Unit 150
Tinley Park, IL 60477


Toll-Free: (866) 671-0811
Fax: (708) 478-2640

e-mail: sales@gmlighting.net

Printed in the USA, June 2019
©2019 GM Lighting LLC

Specifications are subject
to change without notice.

CHECK OUT OUR
WEBSITE AND
SEE THE MOVIE

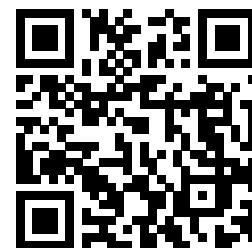

GM Lighting

"Lighting Enhanced by Design"

New Product Supplement
June 2019

DESCRIPTION:

GMLighting's GridTask LED linear light has an added unique combination of LED module and T-Grid bracket. Featuring new generation of ceiling lighting solutions, the luminaires deliver up to 130 lm/W, enlarging the lumen spread over the entire space. It is available in 2' and 4' units with outputs of 10W or 20W, making for glare-free and uniform distribution of light. GridTask LED linear lights offer lighting designers more freedom to design since the led module can follow the ceiling elements in many different ways both across as well as lengthways.

MOUNTING:


GridTask LED linear light is a lighting solution that integrated into T-Grid for suspended ceilings, allow our product to be fully and seamlessly integrated or retrofit into standard 15/16" (G1) or 9/16" (G2) T-Grid of suspended ceiling. It can replace selected cross tees of the grid ceiling suspension system where light is desired. It can be parallelly connected 3pcs per power supply – with plug and play wiring.

FEATURES:


- UL Listed
- DLC Qualifications
- Fixture under 1/2" height
- Diode-free illumination
- 0-10 Dimming (DIVA-DVTV(LUTRON), NOVA-NTSTV-TV)
- Damp Rated
- Efficacy 130LPW
- 100-277V
- 2FT (1300lm) & 4FT (2600lm)
- 35K & 40K
- Easy to Install (Individual, Patterns or Continuous)
- LM70 / Warranty 5yr
- Recommended Dimmers: DIVA-DVTV(LUTRON), NOVA-NTSTV-TV



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

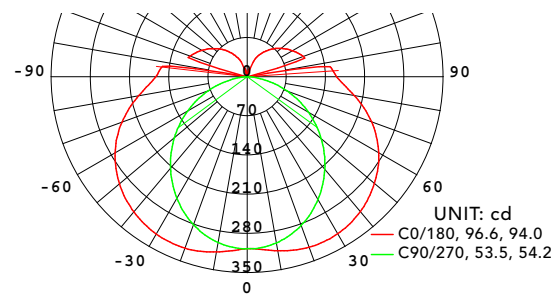

TGB-2-35-G1, 10Watts, 1300lm, Efficacy 130LPW, Beam Angle 120*

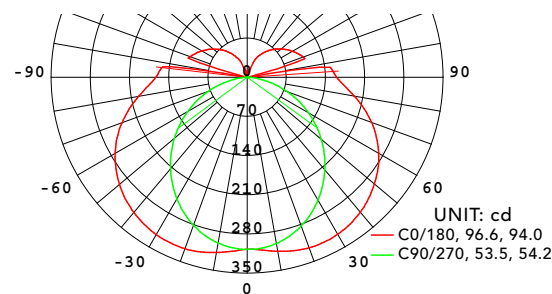

TGB-4-35-G1, 20Watts, 2600lm, Efficacy 130LPW, Beam Angle 120*

CATALOG#	LENGTH	WATTS	LM	COLOR	GRID
TGB-2-35-G1	2 ft	10	1300	35	15/16
TGB-2-40-G1	2 ft	10	1300	40	15/16
TGB-4-35-G1	4 ft	20	2600	35	15/16
TGB-4-40-G1	4 ft	20	2600	40	15/16
TGB-2-35-G2	2 ft	10	1300	35	9/16
TGB-2-40-G2	2 ft	10	1300	40	9/16
TGB-4-35-G2	4 ft	20	2600	35	9/16
TGB-4-40-G2	4 ft	20	2600	40	9/16

ORDERING EXAMPLES:

TGB-2-40-G1 (T-Grid Bar) 2 ft | 4000 Kelvin | G1 15/16"
 TGB-4-35-G2 (T-Grid Bar) 4 ft | 3500 Kelvin | G2 9/16"

POWER SUPPLIES:

TGB-2-PS-30	30 Max/3 Bar - Plug & Play (see below)
TGB-4-PS-60	60 Max/3 Bar - Plug & Play (see below)

CONFIGURATIONS: (Individual & Continuous Linear, 2 x 2 shown)

