

Operating Instructions



Telescopic Water Fed Pole Window & Solar Panel Cleaning



Window & Solar Panel High Reach Cleaning Equipment by

[equip2clean](http://equip2clean.com)


Contents

Page	Section
2	<i>Know your water fed pole</i>
3-4	<i>Unpacking the contents</i>
5-6	<i>Assembly</i>
7	<i>How to Breakdown/Collapse the Pole</i>
8	<i>Operating Instructions</i>
9	<i>Adjustment and Best Practices</i>
10	<i>Arrived damaged or missing parts</i>
11	<i>Contact Us</i>

Know Your Water Fed Pole

Components

1. Brush head with brass nozzle
2. Angle adapter/gooseneck connector
3. "Y" connector
4. Length adjustment clamps
5. Foam comfort handle
6. Hose
7. Brass male quick connector

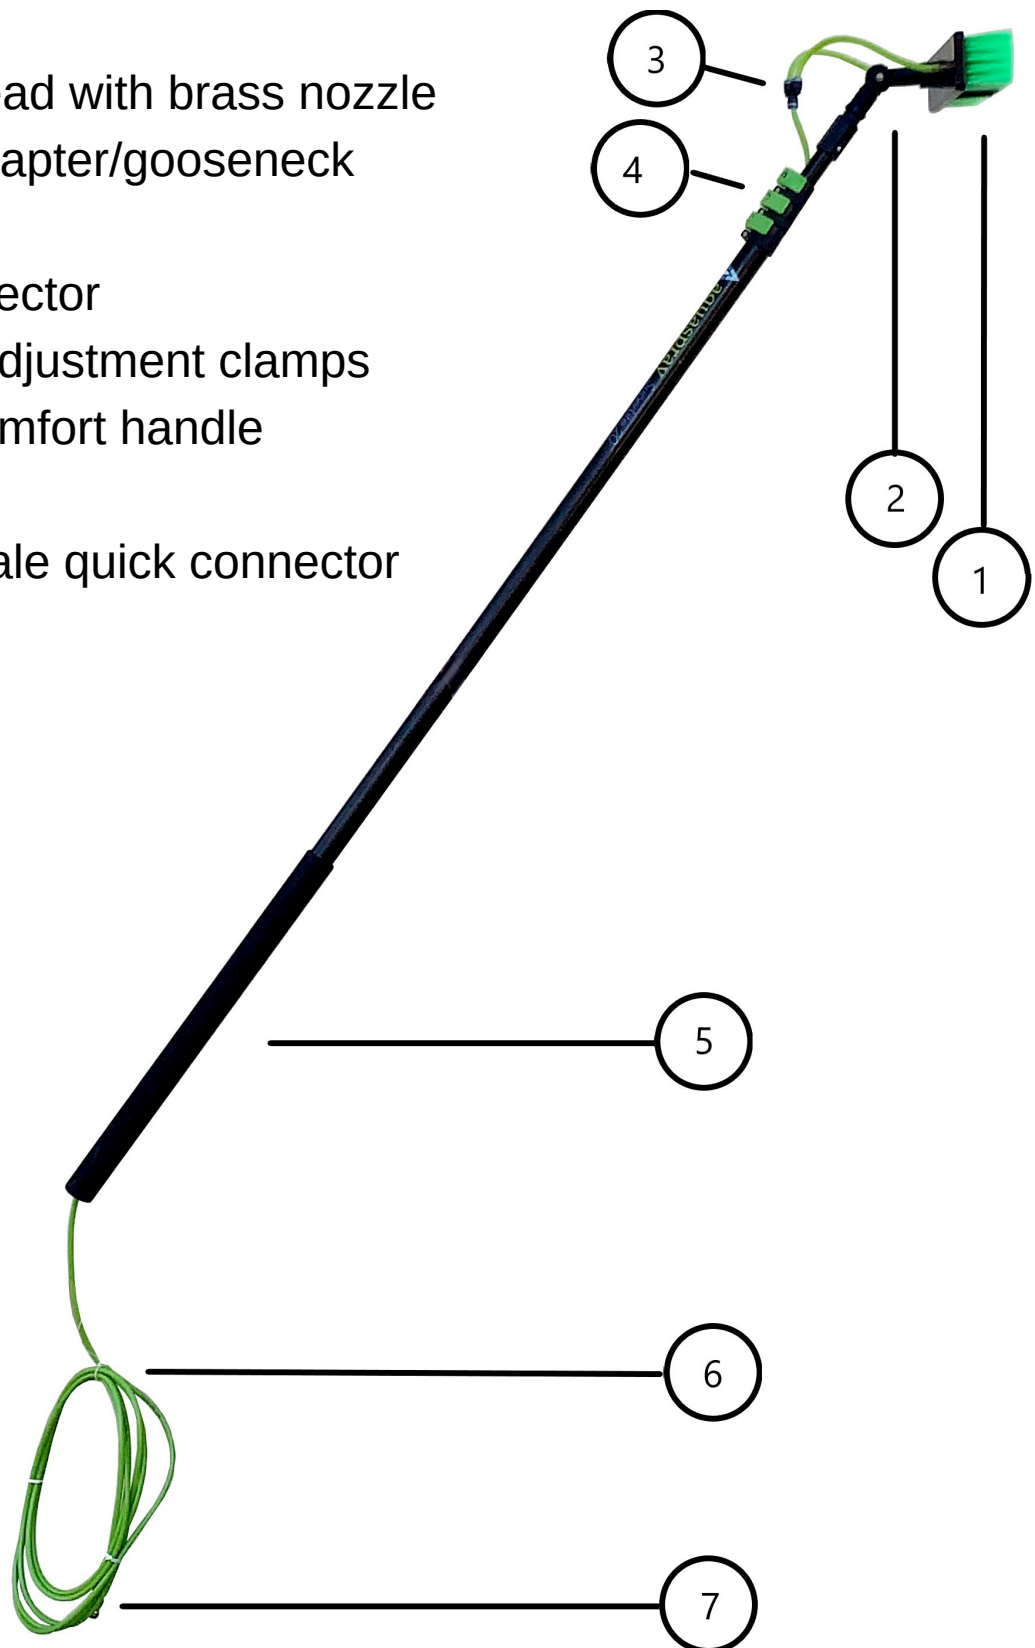

equip2clean

Unpacking

Box Contents

- Telescopic water fed pole x 1.
- Angle adapter (single or double gooseneck) x 1.
- Hose w/ brass male shut-off valve for use with outdoor water faucet or hose x 1.
- "Y" connector x 1.
- Brush head x 1.
- Allen key x 1,
- Instruction manual x 1.
- Optional: Squeegee (if purchased with double gooseneck)



equip2clean

Unpacking (Cont'd)

1. Carefully remove the water fed pole from the box and check to see that all of the parts are supplied
2. Inspect the product carefully to make sure no breakage or damage occurred during shipping. If you find damage or missing parts, please email: kiamproducts@aol.com or call Equip2clean customer service at 0044 (0) 151 548 5599.
3. NOTE: Do not discard the shipping carton and packaging material until you are ready to use the water fed pole. The packaging is made of recyclable materials. Properly dispose of these materials in accordance with local regulations or save packaging for long-term product storage.

equip2clean

Assembly

Attach the angle adapter/gooseneck to the end of the pole.



Attach short hoses to Brush Head.



Attach the Brush Head to the angle adapter/gooseneck .



Assembly (Cont'd)

Attach the "Y" Connector to the Pole Hose



To extend the pole, first un-clamp the green pole clamp (closest to the bottom of the pole) and extend. Then lock the clamp and the extend the other sections one by one .



Adjust the angle adapter/gooseneck to the desired angle and hand tighten the star nut.



Breakdown / Collapsing the Pole

To collapse the pole, simply un-clamp the bottom clamp on the pole and slowly push the section above into the bottom section.
IMPORTANT: While collapsing the pole gently pull the hose from the bottom of the pole to prevent the hose from bunching inside, it is helpful to have two people.



Attach the male brass water shut off valve to a faucet adapter. Then attach to the garden hose or faucet.



NOTE: To remove the hose from the "Y" connector first press in the blue locking collar before pulling the hose.



Operating Instructions

1. After the assembly, extend the pole section by section starting with the bottom section first to the desirable length.
2. NOTE: Ensure that the hose is free to be pulled into the pole when extending.
3. When retracting the pole it is important to gently pull the hose from the bottom of the pole so as to prevent the hose from bunching inside the pole. Two people make this process easier.
4. This product is applicable for cleaning outer window glass, solar panels, residential siding, trucks and larger automobiles.
5. Store the water fed pole in a cool dry place to prevent premature aging of components due to moisture and prolonged lighting.



Pro Tip

Q. Why not extend pole fully, then lift to cleaning area?

A. The principle of leverage, when a tool is raised, the fulcrum of the lever is in the position of the hand grip, so that the longer the pole extends, the greater force needed to lift the pole. Therefore, leaning against the wall and extending the pole section by section to the clean area is the most labor-saving way.

Adjustment and Best Practices

- For mobility we recommend one of our AquaSpray water tanks with modulated water pump, this can allow the use of pure water for better cleaning results. These can be found at www.equip2clean.co.uk / www.kiamproducts.co.uk
- The locking clamp can be adjusted by the hex key loosen and tighten the hexagon screws to retract or extend pole smoothly. (pictured below)
- If it is not necessary to fully extend the pole it is best to extend the bottom poles first, so that the relative strength is large and the operation will be labor-saving.
- The entire telescopic pole will bend when it is fully extended, this is normal characteristics of the material and will not affect the performance or the durability of the product.



Arrived Damaged or Missing Parts

If your pole arrived damaged or missing parts . You must call us within 30 days of purchase.

Please contact us on:

Email: kiamproducts@aol.com

(we need your name address and order date, and the parts that are missing)

or

Call Us 0044 (0) 151 548 5599

equip2clean



equip2clean

Product Name : AquaSpray Superlite Telescopic Water Fed Pole

Manufacturer : Equip2clean

Address : Kiam House Birchill Road Knowsley Merseyside. L33 7TD U.K.

Phone No : 0044 (0) 151 548 5500

Website : www.equipmartuk.co.uk / www.equip2clean.co.uk /

www.kiamproducts.co.uk / www.wolfcreektools.co.uk /

www.castleheaters.co.uk

E-mail : kiamproducts@aol.com