

KEST™

Your source for reliable Relays & Sockets

KS2E-M - Series











Miniature Power Relay



E323872



| | |
|--------------------------------|--|
| Dimension: | 21 x 10 x 12mm |
| Coil Voltage: | 3, 5, 12, 24 VDC |
| Contact Current (A) | 2 A |
| Coil Power: | 0.20W |
| Contact Rating: | 2A/28Vdc 0.5A, 1A/125Vac, 30Vdc |
| Contact Arrangement: | 2 Form C |
| Max. Switching Power: | 48W 60VA |
| Max. Switching Voltage: | 24Vdc 220Vac |
| Contact Material: | Ag AgNi (Au clad) |
| Contact Resistance: | ≤50m Ω |
| Insulation Resistance: | 1000M Ω |
| Operating Temperature: | -30°C ~ 70°C |
| Electrical Life: | 10 ⁵ times |
| Dielectric Strength | Mechanical Life: 10 ⁷ times |
| Coil and Contact: | 500V (50Hz) |
| Weight (Approx.): | 5grams (2oz.) 1000V (50Hz) |

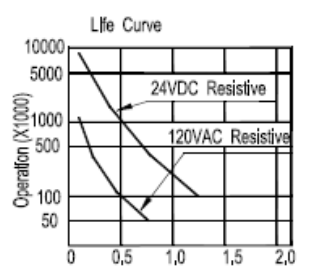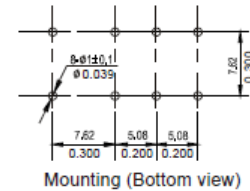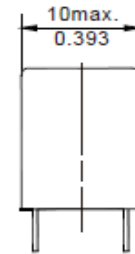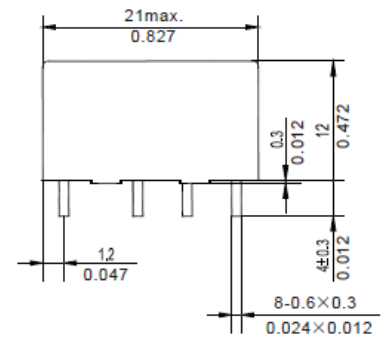

*Comparable to most Industry Standard Application
©Copyright 2010 KEST™ – All rights reserved