

CUPOLA INSTALLATION

- The Cupola has been partially pre-assembled. You can assemble it on the ground, and then place it in position on the Roof when completed.
- Fasten the beveled sidewall pieces together. Place the Roof on and secure it using two 3" screws per side.
- When all four sides are completed place the large Cap on the top of the gazebo. Be certain to level the Cap. Secure the Cap using three 3" screws. Screw from the top down into the Sidewall pieces.
- Secure the small Cap to the large cap using three 3" screws.
- To mount the Cupola on Roof peak, remember to line up the Cupola posts with the Roof Seams. The bottoms of the Cupola Walls have been beveled to seat properly on the Roof. See Figure S28.
- Continue with the Ridge caps to complete the Roof. Trim the last one or two to fit snug up against the Cupola. Use an exacto knife to trim that last Ridge Cap.

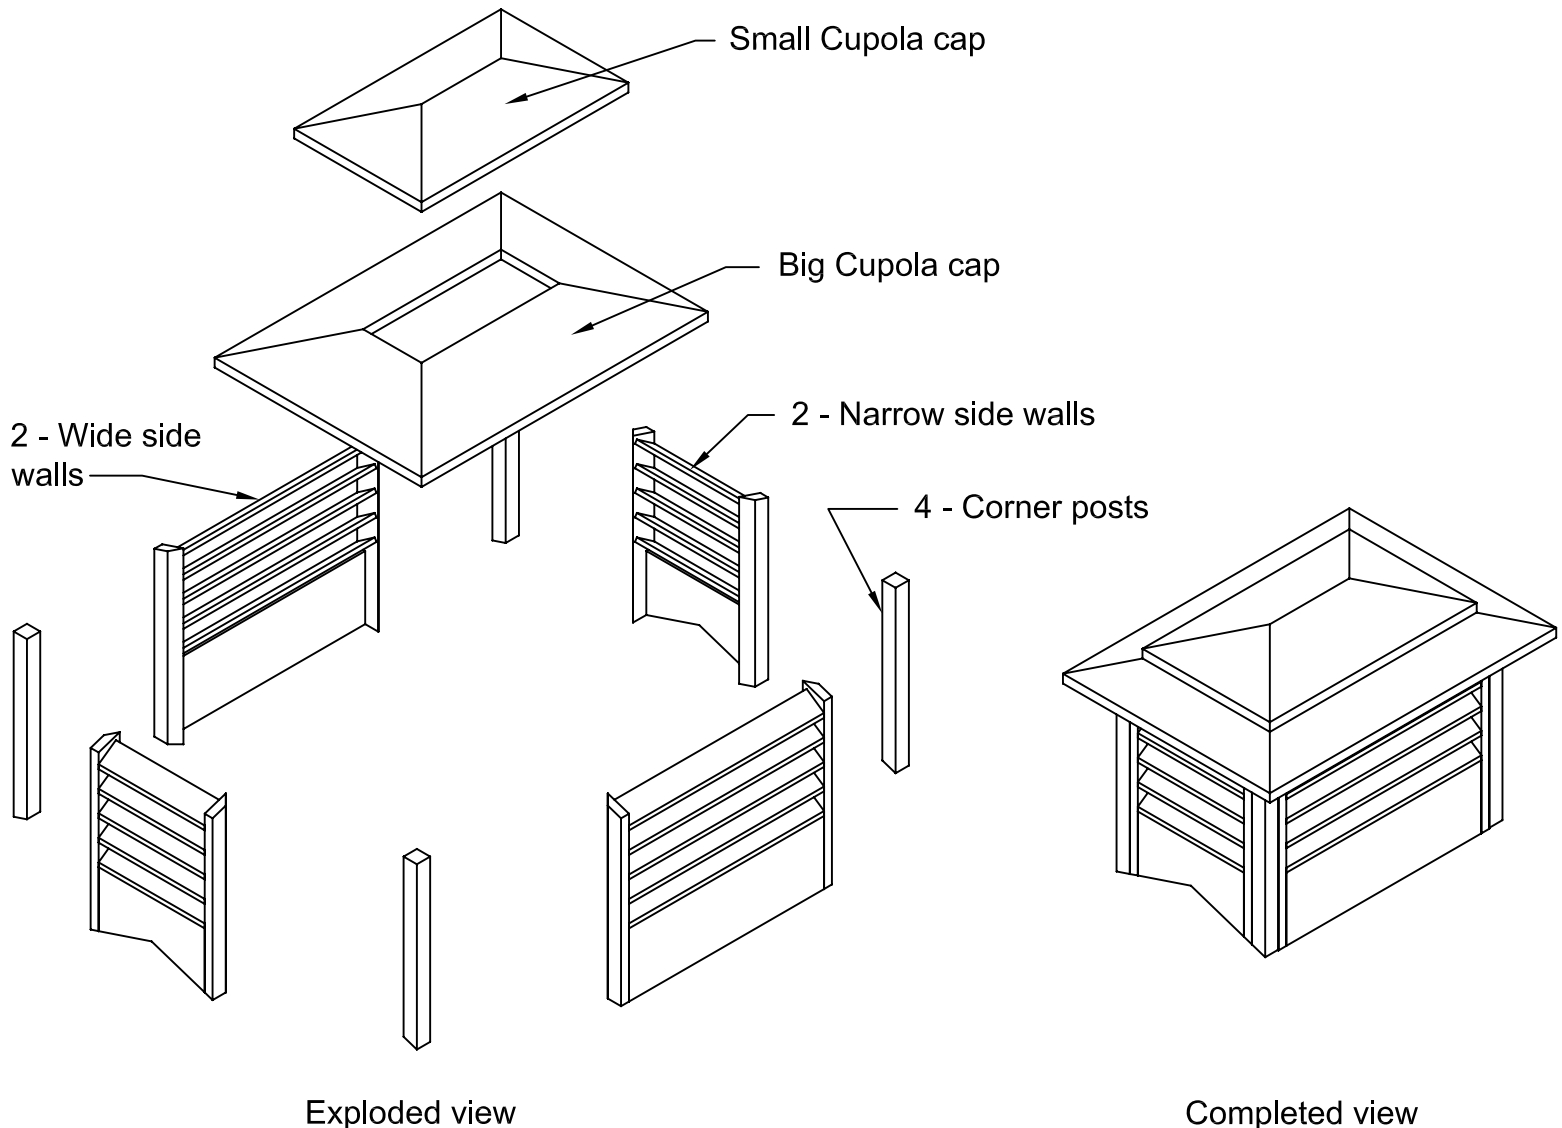


Figure S28