



# PC 5T Ceiling Loudspeaker

①




Cut out Ø 170 mm hole for PC 5T.

②

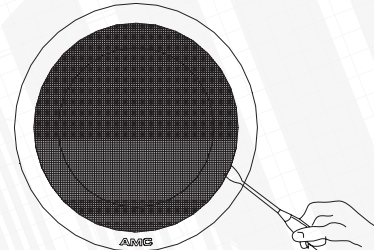

Remove the front grill.


③

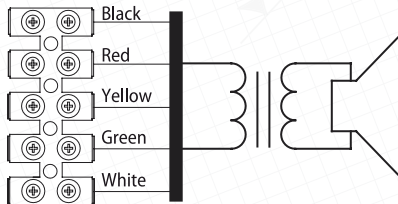

COLOR	SP 10
Black	COM
Red	1.5 W
Yellow	2.5 W
Green	5 W
White	10 W

Connect speaker to signal line via block terminal.

④

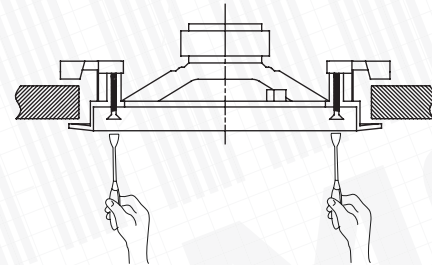

Carefully push speaker in the cut hole and fix the loudspeaker with mounting screws. Mount the grill on the loudspeaker.