



Article number:RM-300X


## Specifications

Power source	24 V DC (Operation range: 15 - 40 V DC)
Frequency response	100 Hz - 20 kHz
Distortion	< 1 %
Current consumption	240,0 mA max.
S/N ratio	60 dB
Audio output	0 dBV, 600 Ω, balanced
Operating humidity	35% - 80%
Inputs	3.5 mm phone jack, for AUX (-20 dBV) or Mic (-40 dBV)
Controls	1 emergency button, 13 free assignable function buttons, 1 talk button, volume microphone, volume speaker
Operating temperature	0°C - 40°C
Indicator	2 LEDs per function button, one of them 3-colour LED (green/yellow/red)
Key extension	7
Microphone type	Elektret-condensor
Directivity	Cardioid
Dimensions	190 x 76.5 x 215 mm (W x H x D)
Gross weight	1,3 KG
Finish	ABS resin, black,
Weight	0.85 kg

# RM-300X

VOIR REF RM-300X C01

Appearance

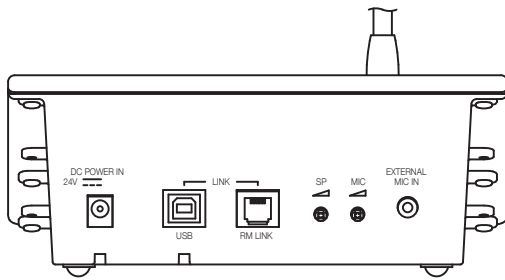

Rear View


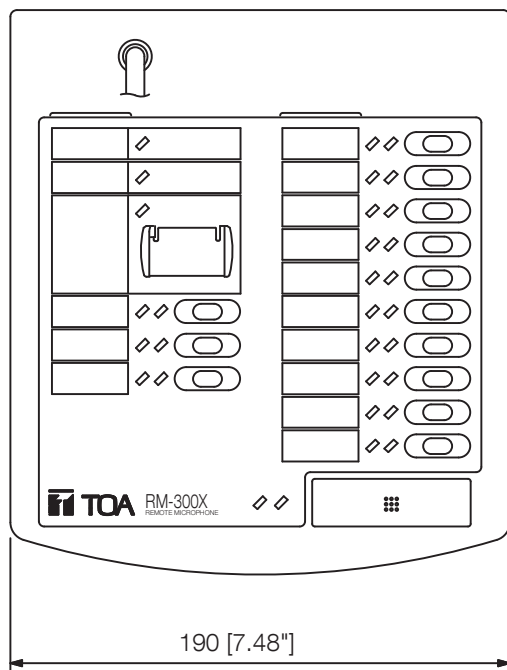


Figure as viewed from point A

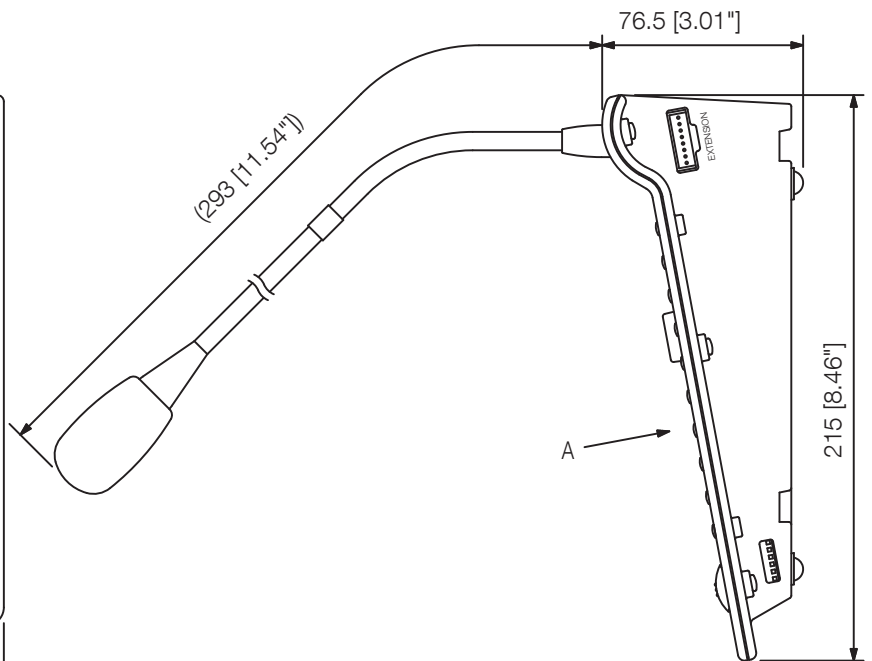

Side View

UNIT:mm

SCALE:1/3

Note: Numerical values in parentheses are for reference only.