

SR-H2L

LINE ARRAY SPEAKER

The straight SR-H2L Line array speaker forms a line sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching transformer.



Article number:SR-H2L
 Alternative products: SR-H2S, SR-H3L, SR-H3S


Specifications

Sensitivity (1#W, 1#m)	92 dB
Frequency response	80 Hz - 18 kHz
Connection	Removable input connector
Rated input (low impedance)	Continuous program: 180 W
Rated impedance	8 Ω
Speaker component	7 cm cone-type x 9
Finish	MDF, paint, off-white (RAL 9010 or equivalent),

SR-H2L

LINE ARRAY SPEAKER

Appearance

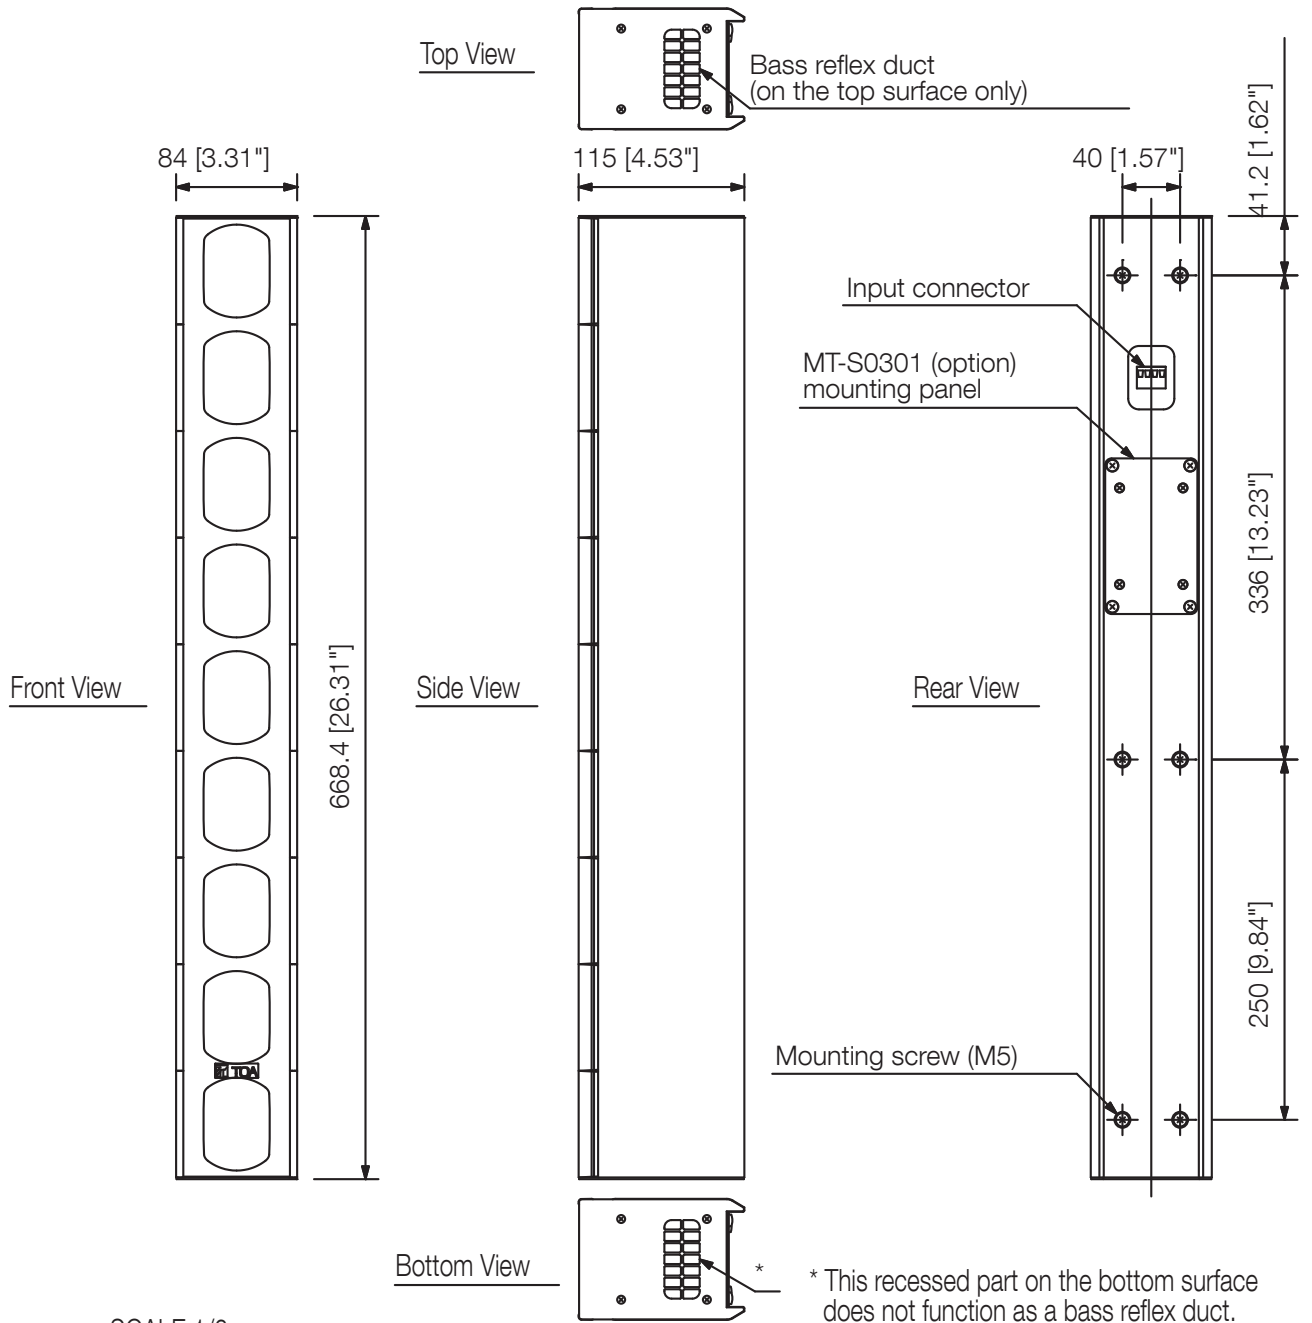

UNIT:mm

SCALE:1/6