

iSpeak 6

PLASTIC SURFACE MOUNT LOUDSPEAKER



iSpeak 6 is a 6 W cabinet loudspeaker featuring a durable HIPS plastic enclosure with a metal grille. It includes a built-in 100V transformer and a 5.5" (139 mm) full-range driver, optimized for constant voltage speaker systems. Designed for quick and secure horizontal or vertical mounting on any flat surface, it delivers clear sound for both public address and background music applications. Ideal for use in commercial and institutional environments such as retail stores, educational facilities, and government buildings.




Technical Specifications	iSpeak 6
Rated power	6 W
Transformer power taps	6 W - 3 W
Sensitivity	92 dB (1 W / 1 m)
Max. SPL	99 dB (Pmax / 1 m at 2491 kHz)
Frequency Response	130 Hz - 17 kHz
Dispersion at 1000 Hz	180° (H), 140° (V)
Driver dimensions	5.5" (139 mm)
Dimensions	267 mm x 166 mm x 80 mm
Weight	1kg
Material	ABS plastic, steel grill
Colour	Papyrus white (RAL 9018)

iSpeak 6


PLASTIC SURFACE MOUNT LOUDSPEAKER






Frequency response

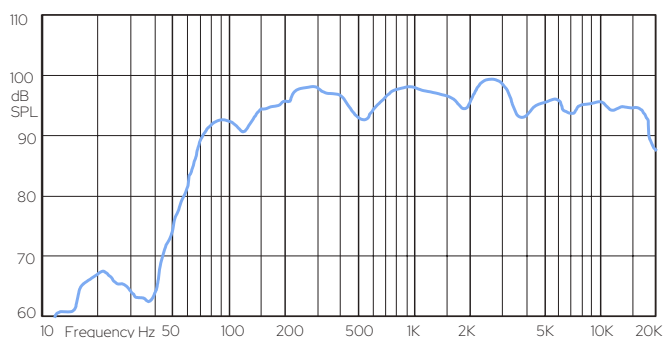

Impedance

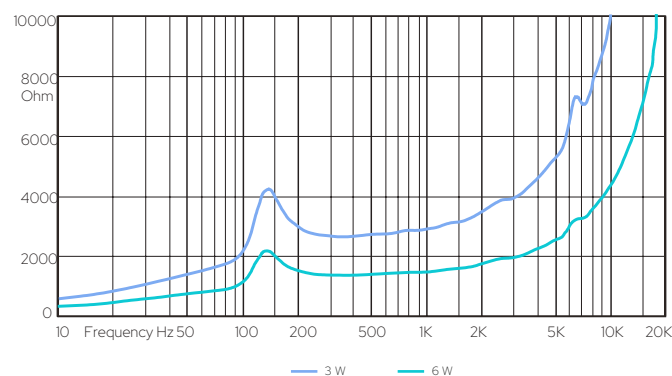

Horizontal/vertical polar diagrams



Dimensions

