

DTD BARN LIGHT

DESCRIPTION

The Dusk to Dawn Barn Light is the perfect solution for many general purpose outdoor applications. It replaces traditional 100W-400WHID fixtures and can mount directly on a wall or to a pole. All fixtures are installed with a DC photocell.

APPLICATION

Farms/Barns, Storage Sheds, Entryways/Pathways, Industrial Yards, Security, Building Perimeters, Area Lighting.



PRODUCT FEATURES




- 90% energy saving compared with traditional HID
- CCT: 3000K/4000K/5000K Selectable
- 40W/60W, 80W/120W Selectable
- Suitable for wall or pole mount applications
- Replaces 100W-400WHID, with LED 40W 60W 80W 120W models
- Universal voltage 120-277VAC, 50/60HZ
- Polyester powder coat bronze finish for outdoor lighting purpose
- -40 F to 104 F (-40 °C to 40 °C) operating temperature
- IP65 rated, for wet applications
- 50,000hours lifespan, 5years warranty

DTD BARN LIGHT




SPECIFICATIONS

ITEM #	Watt	Voltage	Light Efficacy	Chips	CCT	LM(±5%) @5000K	PF	CRI	Working Temp	Replaces
BWDTD-40W-U-CS	40W	120-277VAC	125lm/w	Lumiled2835	2700K~5700K single CCT	5000	>0.9	>80	-40°C~40°C -40°F~104°F	100W-150W
BWDTD-60W-U-CS	60W	120-277VAC	125lm/w	Lumiled2835	2700K~5700K single CCT	7500	>0.9	>80	-40°C~40°C -40°F~104°F	175W-250W
	60W 48W 36W	120-277VAC	125lm/w	Lumiled2835	3K/4K/5K CCT Tunable	7500 6000 4500	>0.9	>80	-40°C~40°C -40°F~104°F	100W-250W
BWDTD-80W-U-CS	80W	120-277VAC	125lm/w	Lumiled2835	2700K~5700K single CCT	10000	>0.9	>80	-40°C~40°C -40°F~104°F	250W-320W
BWDTD-120W-U-CS	120W	120-277VAC	125lm/w	Lumiled2835	2700K~5700K single CCT	15000	>0.9	>80	-40°C~40°C -40°F~104°F	400W
	120W 96W 72W	120-277VAC	125lm/w	Lumiled2835	3K/4K/5K CCT Tunable	15000 12000 9000	>0.9	>80	-40°C~40°C -40°F~104°F	250W-400W

DIMENSIONS

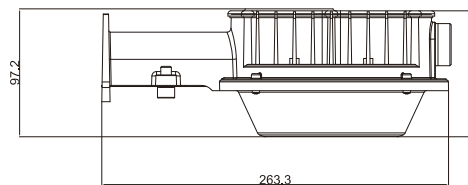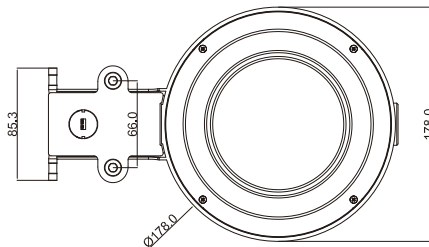


40W/60W

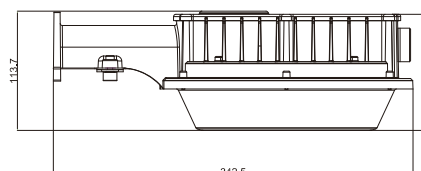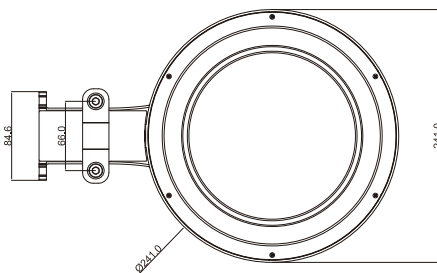


80W/120W

DTD BARN LIGHT


CCT & WATT SELECTABLE

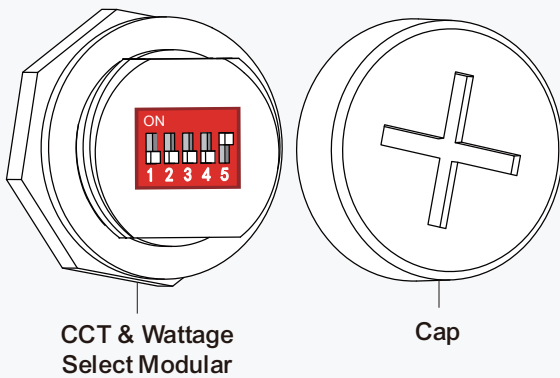


Wattage Select



100% (Default)



80%



60%

Photocell




Sensor ON




Sensor OFF
(Default)


CCT Select



5000K (Default)



4000K



3000K