



Recessed LED Slim Panels With Night Light

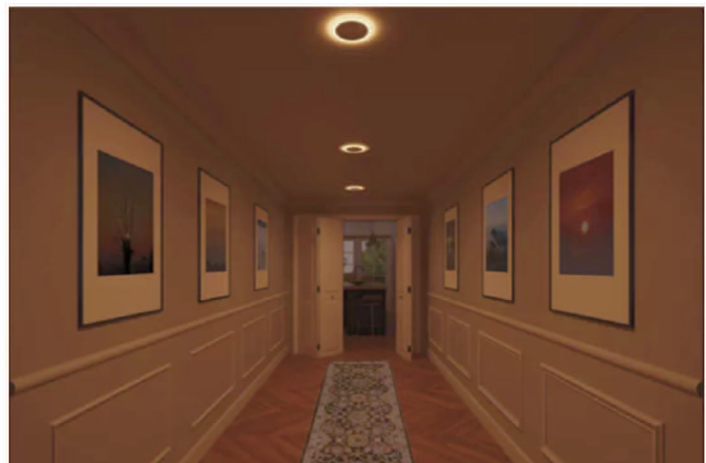

Product Code	Input Voltage	Power	Lumen	CRI	Beam Angle	Color Temperature	Body color	Size
CL-DSNL-49-5CCT-WH	110-130 VAC	9+2w	800lm	>85	120°	5CCT Adjustable 2700K-3000K-3500K-4000K-5000K	White	4inch
CL-DSNL-49-5CCT-BL	110-130 VAC	9+2w	800lm	>85	120°	5CCT Adjustable 2700K-3000K-3500K-4000K-5000K	Black	4inch

- Dual mode downlight with 2200K night light
- Toggle ON/OFF in less than 2 seconds to switch between downlight mode and night light mode
- Isolated driver, prevents electric shock
- PF > 0.90
- Available in damp and wet location
- IC rated, safe to be in direct contact with insulation
- cETL approved
- NO flicker
- Airtight
- FT4 wire
- Triac dimmable subject to proper dimmer
- Life time >50,000 hrs
- 5 years warranty

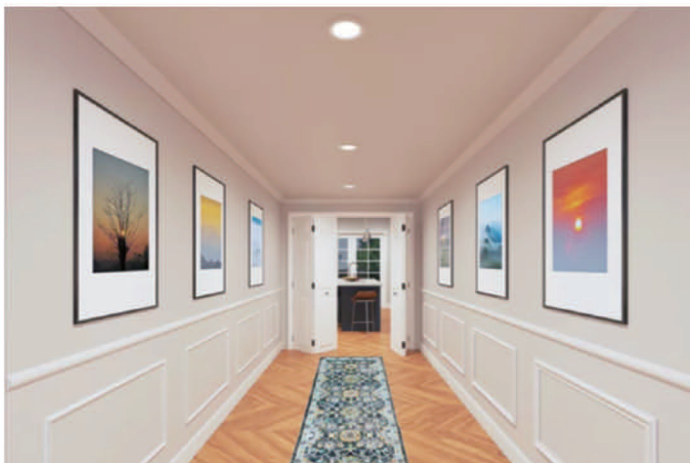