

LHB04 Linear High Bays

Power Selectable | Colour Selectable | 120-347V

The successor to our best-selling LHB03 Linear High Bays!

Ideal for warehouses, factories, workshops, and more

Energy efficient replacement for traditional fluorescent fixtures and HID high bays



Power Selectable

70W / 90W / 110W

Colour Selectable

3500K / 4000K / 5000K

Complete with 10' Cord Whip

0-10V Dimmable



Centre Knockout Allows for Easy Installation of an Optional Motion Sensor
(sold separately)

Newly Designed, Shatterproof Polycarbonate Optics meet/exceed DLC 5.1 glare standards

Strong Die Cast Housing and reduced size for easy installation

*3 ft Chain and Mounting Hooks Included

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	134 lm/W
CCT	3500K/4000K/5000K
CRI	83
Beam Angle	90°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year
Factory Settings	110W 4000K 90°

LUMEN OUTPUT			
	3500K	4000K	5000K
70W	10318 lm	10742 lm	10616 lm
90W	12870 lm	13580 lm	13265 lm
110W	14929 lm	16113 lm	15285 lm

APPROVALS & LISTINGS

cUL	E482965
DLC Premium	S-7EFI9Z

DIMENSIONAL DRAWINGS (IN)

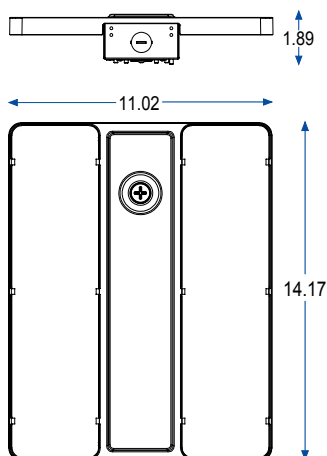

ELECTRICAL

Wattage	70W/90W/110W
Voltage	120-347V
Current	1.20A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Cord Whip	10'
Housing	Die Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	White
IP Rating	IP20

DIMENSIONS AND WEIGHTS

Fixture Weight	4.2 lbs
Fixture Dimensions	14.17" x 11.02" x 1.89"
Carton Qty	1
Carton Weight	5.7 lbs
Carton Dimensions	15" x 11.8" x 3.4"

ACCESSORIES (Ordered Separately)

Pendant Mount	LHB04-BKT
Surface Mount	LHB04-SK
Microwave Motion Sensor	MS04-MW-TW-DC
Infrared Motion Sensor	MS01-PIR-TW-DC
Remote Control	MS04-RC
Wire Guard (85-150W)	LHB04-WG-SM
Emergency Driver	YH36-25WL-300