

WPX Wall Pack

30W | Colour Tunable | 120-347V



The most versatile architectural wall pack in Canada
Ideal for outdoor wall-mount applications such as commercial,
industrial, retail, or hospitality buildings

Type 3 Distribution Optics
Type 2 and Type 4 options available

Durable Die-Cast
Aluminum Housing

1/2" NPT Entry
on all sides



Colour Tunable
3000K/4000K/5000K

120-347V Driver
with 6KV
surge protection

Optional Accesories (sold separately):
Visor, Type 2 Optics, Type 4 Optics



WPX-VISOR-S



WPX-T2S



WPX-T4S

TECHNICAL DATA



LIGHT SPECIFICATIONS

| | |
|----------|-----------------------|
| Lumens | 3,764 lm |
| Efficacy | 122 lm/W |
| CCT | 3000K / 4000K / 5000K |
| CRI | 73 |
| Dimmable | 0-10V |
| L70 Life | 50,000 hrs |
| Warranty | 10-year |


APPROVALS AND LISTINGS

| | |
|------|--------------|
| cETL | 5018387 |
| DLC | PLYP56YKR048 |

ILLUMINANCE AT A DISTANCE



ISOCANDELA PLOT

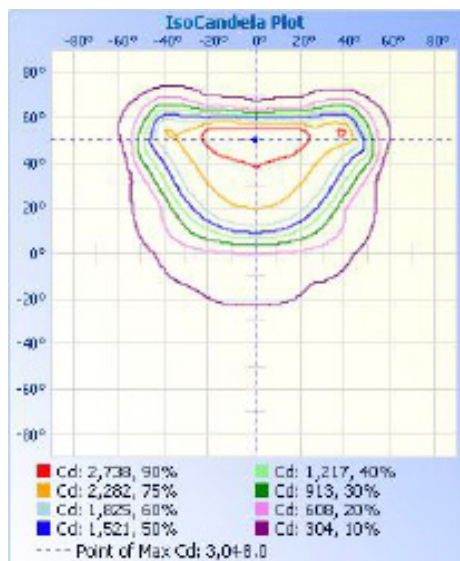

ELECTRICAL

| | |
|----------------|-------------|
| Wattage | 30W |
| Voltage | 120-347V |
| Power Factor | 0.9 |
| THD | 14% |
| Operating Temp | -30 to 45°C |

CONSTRUCTION

| | |
|-------------------|--------------------|
| Housing | Die-Cast Aluminum |
| Cover | Polycarbonate |
| Finish | Black |
| IP Rating | IP65 |
| Net Weight | 1.6 kg |
| Gross Weight | 2.1 kg |
| Carton Qty | 1 |
| Carton Dimensions | 200 x 260 x 275 mm |

ACCESSORIES (Ordered Separately)

| | |
|---------------|-------------|
| Visor | WPX-VISOR-S |
| Type 2 Optics | WPX-T2S |
| Type 4 Optics | WPX-T4S |

DIMENSIONS

