

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V | 2 ft

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



One Piece Gear Tray
for quick access to driver
and accessories

Stainless Steel
Spring Clips

Colour Selectable
3500K / 4000K / 5000K

1/2" NPT Entry

120-347V Driver

Polycarbonate
Low Glare Lens

Power Selectable
15W / 20W / 25W



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	3,250 lm
Efficacy	130 lm/W
CCT	3500K / 4000K / 5000K
CRI	84
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

ETL	5001780
DLC	S-8DN5T3, S-R4CFLO

ISOCANDELA PLOT

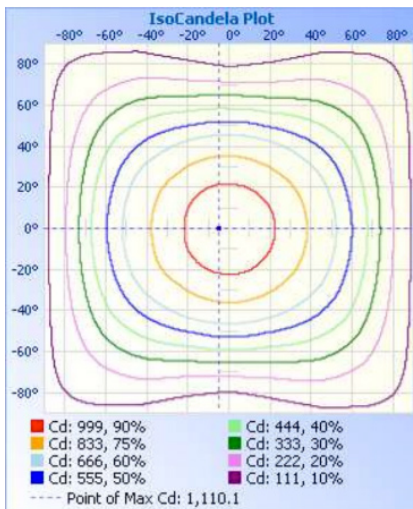

ILLUMINANCE AT A DISTANCE

Center Beam fc	Beam Width	
4.0ft	69.0 fc	10.4 ft 13.8 ft
8.0ft	17.3 fc	20.8 ft 27.6 ft
12.0ft	7.7 fc	31.2 ft 41.4 ft
16.0ft	4.3 fc	41.6 ft 55.2 ft
20.0ft	2.8 fc	52.0 ft 69.1 ft

■ Vert. Spread: 104.8°
■ Horiz. Spread: 119.8°

ELECTRICAL

Wattage	15W / 20W / 25W
Voltage	120-347V
Current	0.5A
Surge Protection	2kV
Auxiliary	12V
Power Factor	0.94
THD	10.8%
Operating Temp	-40°C to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	2 ft
IP Rating	IP66

DIMENSIONS AND WEIGHTS

Fixture Weight	2.2 lbs
Fixture Dimensions	25.6 x 3.3 x 4.1 in
Master Carton Qty	4
Master Carton Gross Weight	13.2 lbs
Master Carton Dimensions	26 x 9.1 x 10.2 in
Carton Qty	1
Carton Gross Weight	3.3 lbs
Carton Dimensions	25.8 x 3.9 x 4.4 in

DIMENSIONAL DRAWING (IN)

