

Coleman[®]-Mach[®]

Rooftop Heat Pumps



INTRODUCING *the* **MACH 8**

- **LOWEST** profile in the Industry... standing short at 8 inches tall. Lower profile means LESS DRAG and improved fuel efficiency.
- **Two motors means The MACH 8 DELIVERS** the same high BTUs of cooling on both high and low speed operation
- **HIGHEST** air flow delivery on high speed, and ULTRA QUIET on low speed for night time cooling.
- **Industry EXCLUSIVE** - molded one piece fiberglass base pan provides excellent durability with reduced weight



- Weighing in at 90 lbs, the MACH 8 is the **LIGHTEST** low profile unit made



FOR MORE INFORMATION,
please visit RVComfort.com


- Backward compatible with any Coleman Mach air conditioner, and installs easily from the roof for ducted top down mounted systems
- Operates even at desert conditions of 125° F
- Has the **LARGEST** BTU resistance heater of any RV air conditioner
- Another Quality Coleman Mach air conditioner - 5,000,000 units and counting. All built in our Wichita, KS factory.



Manufacturer of
Coleman-Mach
RV Air Conditioners

MACH8

	Mach 8 13,500 BTU Air Conditioner	Mach 8 13,500 BTU Heat Pump	Mach 8 15,000 BTU Air Conditioner	Mach 8 15,000 BTU Heat Pump
Cooling/Heating Capacity	13,500 BTU	13,500 BTU	15,000 BTU	15,000 BTU
Electric Heat Strip Capacity	6,000 BTU	6,000 BTU	6,000 BTU	6,000 BTU
Electrical Rating	115 VAC, 60 HZ, 1 Phase	115 VAC, 60 HZ, 1 Phase	115 VAC, 60 HZ, 1 Phase	115 VAC, 60 HZ, 1 Phase
Cooling AMP'S:				
Compressor	12.1	12.5	12.7	12.7
Indoor Motor High/Low	1.3 0.7	1.3 0.7	1.3 0.7	1.3 0.7
Outdoor Motor	1.9	1.9	1.9	1.9
Total @ High/Low Speed	15.3 14.7	15.7 15.1	15.9 15.3	15.9 15.3
Running Watts @ A.R.I. Standard	1599	1647	1483	1471
Running Watts @ Desert Condition	1913	1946	1811	1832
Running Watts-Electric Heat Strip	1748	1748	1748	1748
Compressor Locked Rotor Amps	63	63	63	63
Refrigerant Charge - R-410A	14.0 oz.	18.25 oz.	20.0 oz.	21.0 oz.
Evaporator Air Delivery (CFM)	300 - High Speed	300 - High Speed	300 - High Speed	300 - High Speed
Weight	90 lbs.	93 lbs.	92 lbs.	94 lbs.

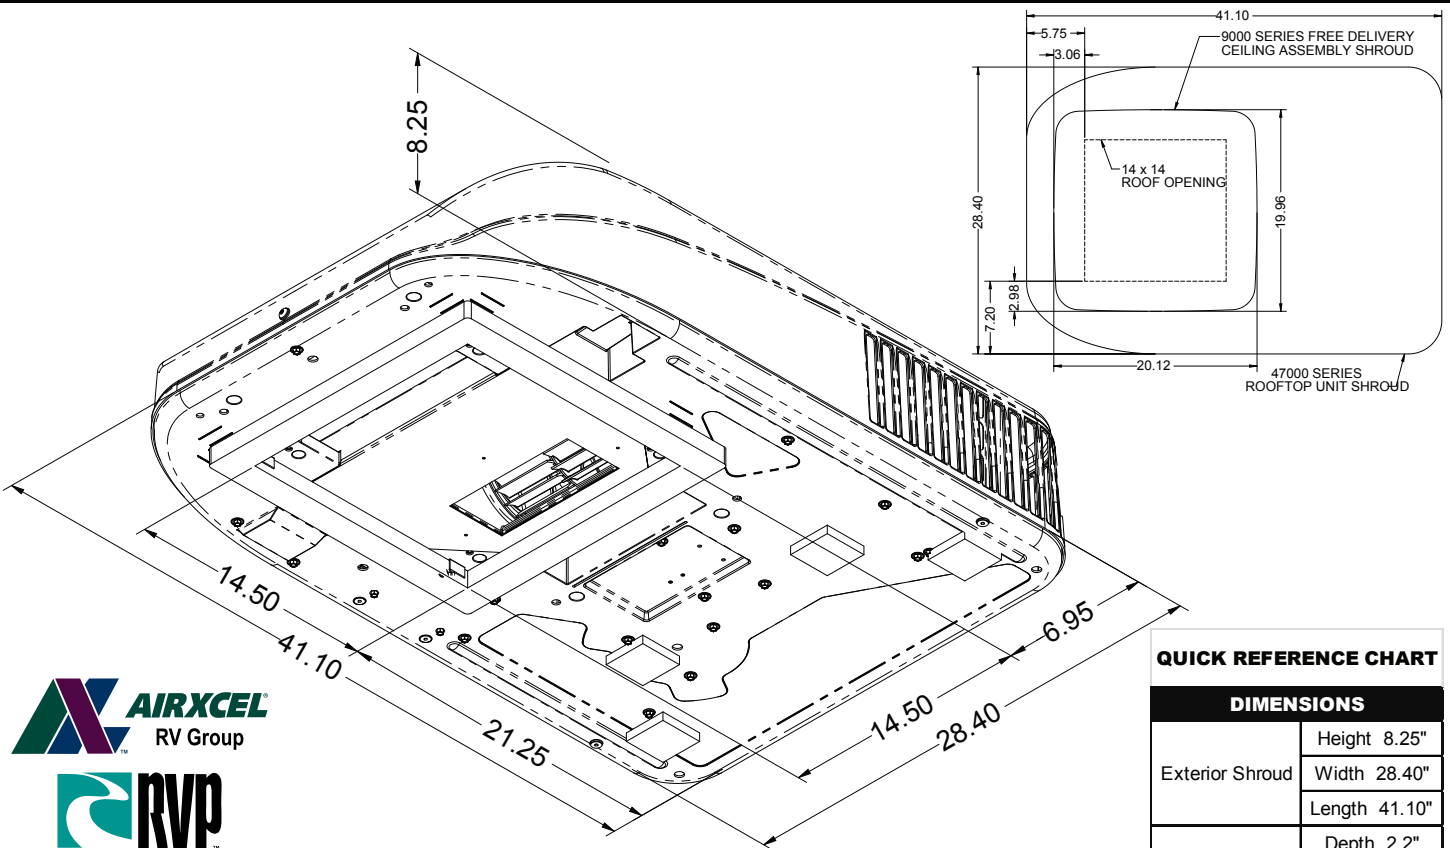

QUICK REFERENCE CHART

DIMENSIONS	
Exterior Shroud	Height 8.25"
	Width 28.40"
	Length 41.10"
Interior Shroud	Depth 2.2"
	Width 19.9"
	Length 20.1"



A Division of AIRXCEL, Inc.

Manufacturer of

Coleman-Mach
RV Air Conditioners