
Profile Extension Cords With "CGM"

Amber light indicates power in the outlet.

Stress collar prevents cord from pulling out.

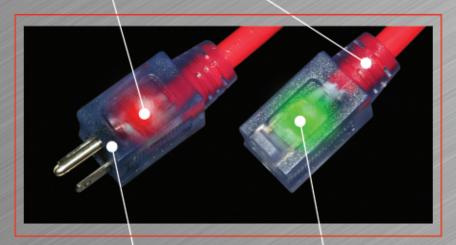

Nylon Premold prevents ground pin and blades from pulling out.

Green light indicates continuous grounding.









Where The Priority Is On Safety And Performance



Our Pro Glo® Products Program

When you purchase the best quality extension cords, we include the following benefits which are part of our Pro Glo® Products Program.

Clear lighted ends that indicate power is running from the power source through the cord.

Our patented (CGM) Continuous Ground Monitoring connector displays a green neon light that indicates the extension cords' electrical current is safely grounded.

Choose from a variety of safety colors to help track your cords, prevent job site theft, and create visual safety underfoot.

At the factory, we will Custom Print your company name and additional information down the length of your extension cords upon request.






Heavy Duty Battery Booster Cables



- Fits All Top & Side Post Batteries.
- Exclusive Tangle Free Twinline Construction is a must.
- -50°C Cold Weather Flexibility For Easy Use.
- Triple Polarity Identification.
- Direct Contact Jaws Offer Maximum Amperage Contact.
- Extra Large Nylon Zippered Carrying Case Included.
- Custom Print Available

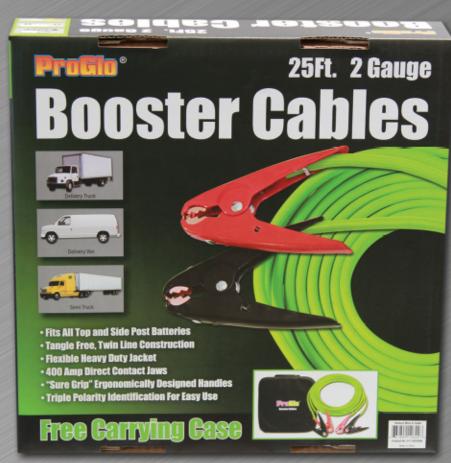



CENTURY

Professional 100% Copper Booster Cables



- Tangle Free Twinline Construction
- Bunch Stranded Copper For Maximum Flexibility Under Load
- -50°C Cold Weather Rubber Flex™ Jacket
- Available In 1GA, 1 OTT & 2 OTT Sizes
- 1000A Full Copper Clamps
- Extra Long 25 Foot Lengths









Recreational Vehicle, Motor Home Extension Cords, Power Supplys & Adapters

- 100% Bunch Stranded Copper Conductors Guarantee More Flexibility
- -40°F Outdoor Coldweather Jacket
- Clear Lighted Ends Signal Power is On in the Outlet and Cable
- Patented Nylon Fold Away Handles Help Disengage Cord Ends
- Available in Sizes 10/3 STW and 6/3-8/1 STW
- Your Choice of Four (4) Colors in both 25 Foot or 50 Foot Lengths

