Experience the comfort of air

Our Center Point suspension system absorbs impact caused by road shock and provides a smoother ride and optimum brake efficiency. It's easy to install and dramatically improves passenger comfort and reduces side-to-side trailer sway.

Benefits:

Axles, Suspension & Alignment

- Center Point's airbag absorbs road shock and vibrations from both axles simultaneously
- Dampens road shock more effectively than torsion axles
- Protects RV and cargo by absorbing road shock
- Dramatically improves braking distance in panic stops
- Improves the overall ride and reduces driver fatigue





Center Point air ride suspension

part no.	description	
1565391	Center Point Air Ride Suspension; Tandem Axle (3 Boxes)	
1565401	Center Point Air Ride Suspension; Triple Axle (7 Boxes)	

*Call for individual replacement parts

Upgrade your ride

Instantly improve your customer's ride with our complete shock mounting kits. Shocks help to efficiently manage axle spring movement which will provide a smoother, more comfortable ride. Complete mounting kits for 2-3/8" and 3" axle tubes available as well as single replacement shocks. Shock installation requires 4 inches of clearance between tire and frame.

Shocks

Onooko			
part no.	description		
281281	Shock Mount Kit; 3" Axle Tube		
281255	Shock Mount Kit; 2-3/8" Axle Tube		
283271	Standard Replacement Shock (Black)		
283280	Heavy Duty Replacement Shock (Yellow)		




Be prepared in case of an emergency stop

Standard brakes should be adjusted every 3 months. Forward Self-Adjusting Brakes self-adjust during every forward stop, providing up to 50 percent better braking distance and preventing premature brake line and magnet wear.



Get up to 50% better braking distance!

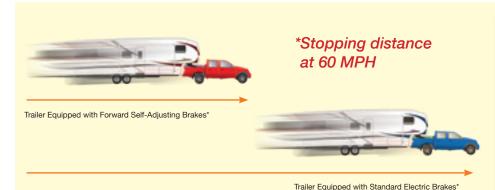

Quick Facts

- Brakes self-adjust during every forward stop giving RVers confidence that they will safely brake during emergency and panic stops
- Provides optimal brake performance;
 Brake auto-set corrects clearance during every stop
- Provides optimal brake lining and magnet wear
- Saves customers money in the long run



Forward Self-Adjusting Brakes

part no.	description	
296649	10" x 2-1/4" LH Forward Self-Adjusting Brake Assembly, 3.5K	
296650	10" x 2-1/4" RH Forward Self-Adjusting Brake Assembly, 3.5K	
296651	12" x 2" LH Forward Self-Adjusting Brake Assembly, 7K	
296652	12" x 2" RH Forward Self-Adjusting Brake Assembly, 7K	



11