

DEPENDABLE OPERATION



Fresh water when you want it and when you need it. Lippert Components' Flow Max water pump delivers a steady flow of water to your RV. Compared to other water pumps on the market, Flow Max delivers superior pressure performance, averaging 45 PSI with an average 3.20 gallons per minute water flow (12V version). This is especially important on larger RVs that have extended plumbing running between the source point and the pump. Flow Max offers superior performance all at a price below similar products on the market today.


NEW PRODUCT




SPECIFICATIONS

- Average 3.20 gallons per minute (GPM) flow -
*Competition *averaged 2.36 GPM when independently tested*
- Average leading pressure of 45 PSI -
*Competition *averaged 42 PSI when independently tested*
- Freeze/thaw tested up to five 2-hour cycles -
*Competition's *housing cracked after one cycle*


Average Gallons Per Minute

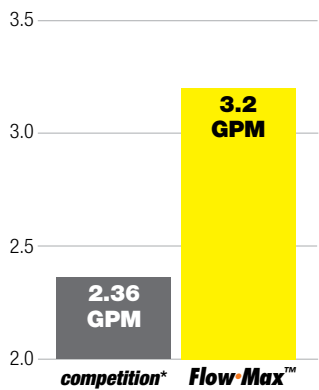

Average Leading Pressure

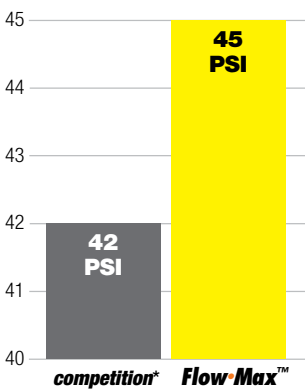

Freeze/Thaw 2-Hour Cycle

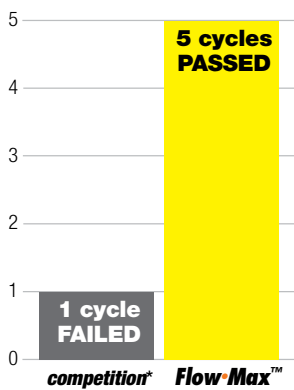

FEATURES

- Self-priming
- NSF & CSA Certified
- 2-year limited warranty
- 12 VDC, 6.0 max amps
- Heavy-duty, corrosion resistant motor
- Pump can run dry without incurring damage
- Fits any OEM pump
- Connectors come standard in the box

*Compared to SHURflo® Revolution™ 4008 Fresh Water Pump. Independently tested by Progressive Engineering, Inc, Goshen, Indiana USA.

part no.	description
689052	12-V Flow Max Water Pump
689054	115-V Flow Max Water Pump
689059	Screen, Filter and Connectors

WASTE MANAGEMENT/FRESH WATER