



# The American Brass Manufacturing Company | Est. 1894

"AMERICA'S FAUCET COMPANY"

## LIFETIME LIMITED WARRANTY

American Brass warrants this product to be leak and drip-free during normal household use for as long as it is owned by the original consumer purchaser. Should a malfunction occur within the time covered by this warranty, replacement parts may be obtained from the place of purchase or from American Brass's Customer Service Department. American Brass will, at American Brass's discretion, provide replacement parts for installation by consumer for any parts that prove defective under normal usage and service with new, like or equivalent American Brass parts.

This warranty shall not apply to goods which have been subject to accidents, abuse, negligence, improper installation, modification, misuse, or defective due to an Act of God.

Our responsibility under this warranty is limited only to replacement of parts and no other costs including but not limited to: labor/service charges and shipping costs. This warranty covers the original consumer purchaser only. Proof of purchase (original sales receipt) must accompany all warranty claims.

[WWW.RVFAUCETS.COM](http://WWW.RVFAUCETS.COM)



**Pull-Down Faucet**

**Thank you for purchasing this American Brass product. By following the care instructions below you will enjoy this quality faucet for many years. American Brass faucets are made with the highest quality for lasting use. Since 1894, our skillfully engineered faucets have provided contemporary designs and fine finishes to complement homes across America.**


**Our products also offer water & energy saving features.**

**Please visit us online to learn more about our company and product offerings:**

[WWW.RVFAUCETS.COM](http://WWW.RVFAUCETS.COM)

#### FAUCET ASSEMBLY

1. Unscrew the retaining ring [H] from the bottom of the faucet and ensure the washer [A] and gasket [B] are also kept with the ring [H].
2. Install the faucet through the hole on the sink, by first threading the flexible hose [D] through the hole. Attach the free end [G] of the flexible hose onto the faucet outlet [F], then place the base of the faucet thru the hole. A second person may be required to hold this in place until the faucet installation is complete.
3. From underneath, slide the washer and gasket [A+B] and then the retaining ring [H] over the free end of the flexible hose [D] and slide it up to the exposed threaded section of the faucet [E].
4. Tighten the retaining ring [A] by hand until it is snug. Using a wrench or pliers, tighten the assembly. Do not over tighten. Gently tighten the 2 screws on the retaining ring [H].
5. Install the counter-weight [C] on the flexible hose [D] approximately 30 inches (76.2 cm) down from the underside of the faucet. This can be adjusted based on your own requirements, but this is the normal location.
6. Screw lever [J] into the faucet.
7. If the handle becomes loose over time, use the supplied Allen wrench to tighten the nut [K].

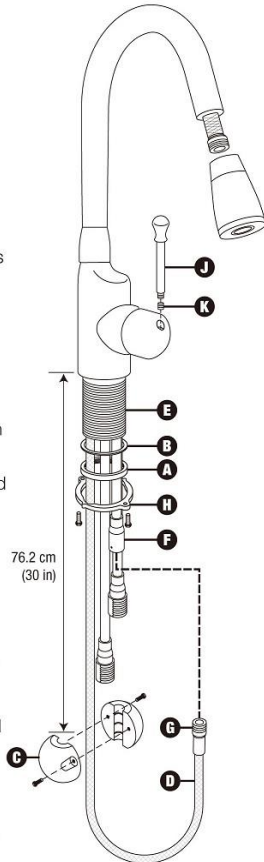

#### BEFORE YOU START

1. Inspect your unit before proceeding. Once you unpack your unit, check for chips, scratches, cracks, dents or scuff marks. If any damage is noticed, do not install.
2. Please read instructions carefully and keep for future reference.
3. Protect the entire surface during installation.
4. All holes drilled into the unit must be done from the finished surface side with extreme care and caulked very carefully to form a watertight barrier.
5. Your installation must comply with all local plumbing codes. Have a qualified tradesman do and/or approve your plumbing installation.
6. Materials required (not included):  
Sealant, Supply lines (see page 7)

**WARNING:** Always wear safety goggles and gloves in order to avoid any personal injuries.

#### CONTENTS:

- Preassembled cabinet x 1 pc
- Utility sink x 1pc
- Faucet assembly x 1 pc
- Strainer x 1 pc
- Drain assembly x 1 pc
- Drawer handle x 2 pcs
- Screws x 4 pcs
- Allen wrench x 1 pc

#### TOOLS REQUIRED

- Adjustable wrench
- Pliers
- Pipe wrench
- Phillips screwdriver
- Sealant
- Utility Knife

#### INSTALLATION INSTRUCTIONS

1. The main cabinet is preassembled. The sink is shipped inside the cabinet. The user or a licensed plumber must install the sink, faucet, strainer and drain assembly.
2. Remove the sink carefully from inside the cabinet, and inspect for damage. If any damage found please contact customer service prior to installation.
3. Test the fit of the sink on the cabinet, and note the final position for your reference. Remove the sink and place upright on a towel or piece of cardboard [1].



Avoid polish or harsh abrasives on finishes! Use damp cloth to clean.



Please conserve water!

