

## Product information sheet DARAS-S-F

Item no. 521752

### Benefits

---



- Can be installed in front of a window
- Simple to operate: lift straight up and lay on one side
- With extendable spray head
- Entry-level model
- Suitable for small sinks
- 80° swivel spout for greater reach
- Minimum clearance between sink and window sash 4 cm

### Colours

---



Available colours:

chrome

galvanic chrome

## Planning information

---

- \*Minimum clearance between sink and window sash 4 cm.


## Scope of supply

---


- Spout can be swivelled by 80°
- Ø 35 mm tap hole required
- With ceramic disk cartridge
- Flexible connector pipes, 450 mm long and  $\frac{3}{8}$ " nut for particularly easy installation
- Nylon-sheathed spray hose
- With non-return valve and thus guaranteed against reflux in accordance with EN 1717

## Details

---

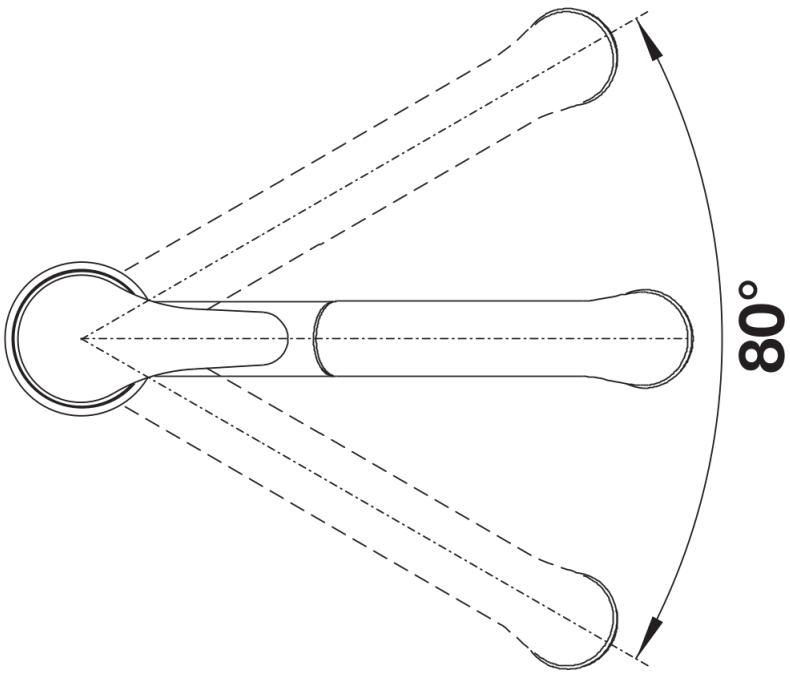

Swivel range

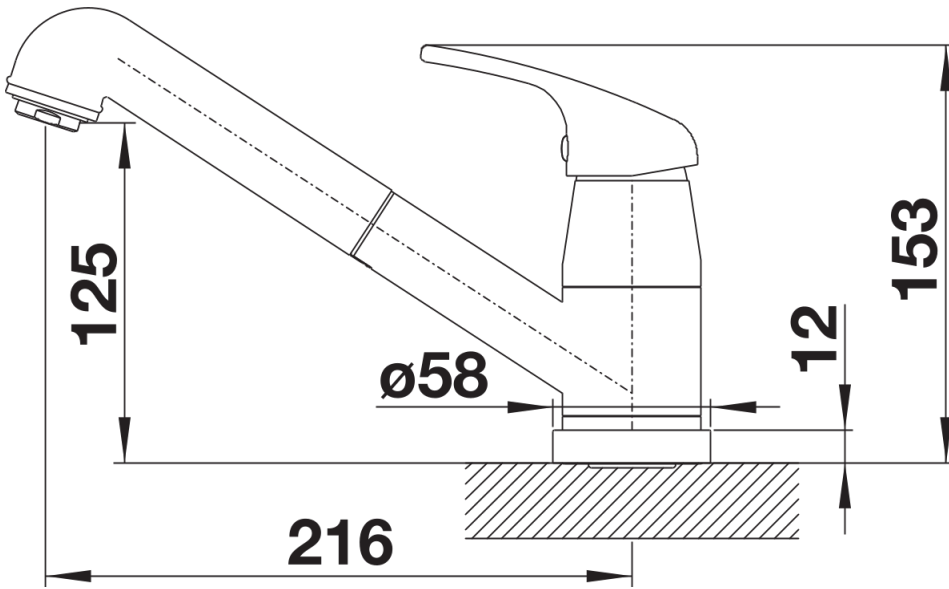

Side view