

Ecostat E

Thermostat for concealed installation for 2 functions

Finish: **Chrome** Article Number: **15708000**



Description


product features

- 2 functions
- shut-off/ diverter valve, thermostat cartridge
- maximum flow rate at 3 bar: 29 l/min
- flow rate upper outlet: 28 l/min
- flow rate lower outlet: 25 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety stop at 40 °C
- temperature limitation adjustable
- connection type: basic set


Product image



Scale drawing

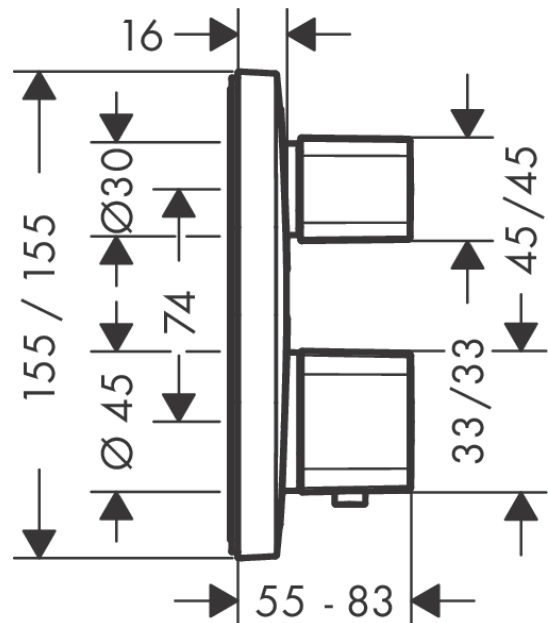

Flowchart

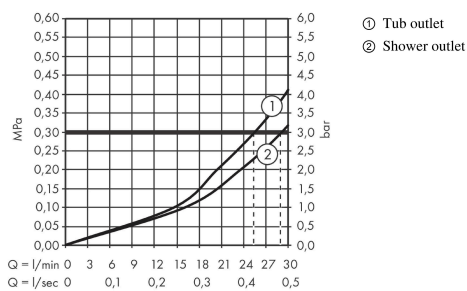

Ecostat E

Thermostat for concealed installation for 2 functions

Finish: **Chrome** Article Number: **15708000**



Spare part list

Year of production: >04/18

Pos.	Description	Article Number	PC	PU
1	handle for thermostat	92273000	12	1
2	handle fixing set	95843000	3	1
3	handle	92280000	10	1
4	adapter for handle	95252000	11	1
5	handle fixing set	98932000	5	1
6	escutcheon 155 / 155 mm	92279000	13	1
7	escutcheon for exchanged connections	92564000	13	1
8	O-ring 44x4	98471000	3	1
9	O-ring 30x5	98153000	1	1
10	sleeve	92216000	8	1
11	sleeve	95253000	8	1
12	holder for escutcheon	98793000	9	1
13	set of fixing screws	96454000	3	1
14	nut	98913000	6	1
15	thermostat cartridge	98282000	14	1
16	cartridge for exchanged connections	92373000	18	1
17	O-ring 25x2,5	92146000	5	1
18	O-ring 25x1,5	98146000	1	1
19	O-ring 20x1,5	98197000	1	1
20	nut	95255000	6	1
21	shut off unit with selector	98283000	12	1
22	set of screws	96525000	3	1
23	O-ring 36x2	98156000	1	1
24	O-ring 16x2	98133000	1	1
25	non return valve (pressure-resistant up to 2 MPa)	92594000	5	1
26	set of non return valves DW 15	97350000	6	1
27	noise reduction	94073000	7	1
28	extension 25 mm	13595000	99	1
29	set of fixing screws	97747000	1	1
30	extension 22 mm	15597000	99	1
31	compensation set 1°	95521000	16	1
a	concealed item	01800180	99	1
b	adapter for exchanged connections	93181000	18	1
c	Grease	90920000	5	1