


arrow

7055.01 - 7055.23

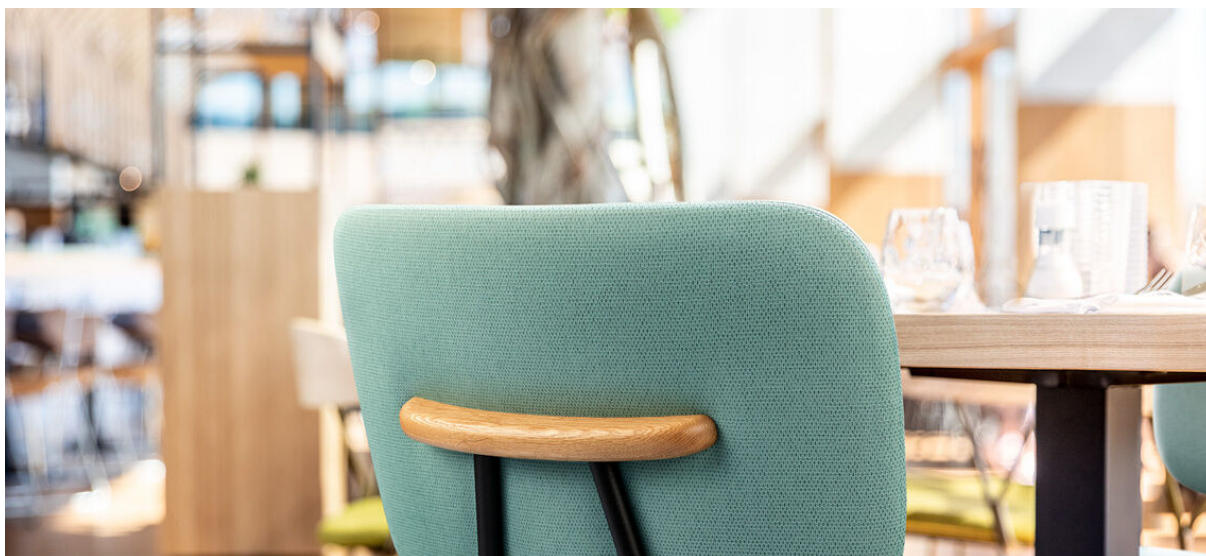

binder

upholstery

03

vinyl

description

two-tone weave structure in fresh and bright colours

composition

vinyl coat, cotton/polyester backing

width

± 137-140 cm, ± 54-55 inches

weight

backing: ± 110 gr/m², ± 5 oz/yd¹

coating: ± 690 gr/m², ± 31 oz/yd¹

thickness

1.1 mm, 0.04 inches

flame retardancy

EN 1021/1-2

BS 5852, crib 5

NF P 92/503 - 507, M2

NF D60-013 (AM 18)

DIN 4102, B2

UNI 9175, classe 1 IM

Cal TB 117

NFPA 260, class 1

IMO 2010 FTP part 8

abrasion

ISO 12947-2

> 300.000 rubs martindale

ASTM D4157

100.000 double rubs wyzenbeek

colorfastness to crocking

ISO 105-X12

wet 5 / dry 5 (scale 1-5)

AATCC 8

wet 5 / dry 5 (scale 1-5)

colorfastness to light

ISO 105-B02

7 (scale 1-8)

ASTM D4329: 150 hours

4 (scale 1-5)

resistance to blood, urine, sweat and sebum

EN 12720

5 (scale 1-5)

breaking strength

ISO 1421

length 470 N / width 313 N

ASTM D2261

length 7.3 lbs / width 9.2 lbs

flexibility

ISO 7854

400.000 cycles

adhesion to coating

ASTM D751


length 8.3 lbf / width 5.2 lbf




vinyl 
COMMITTED TO
SUSTAINABLE DEVELOPMENT

arrow


7055.01 - 7055.23




7055.01




7055.02




7055.03



7055.04




7055.05




7055.06




7055.07




7055.08




7055.09




7055.10




7055.11



7055.12




7055.13




7055.14




7055.15




7055.16




7055.17




7055.18




7055.19




7055.20



7055.21



7055.22



7055.23