




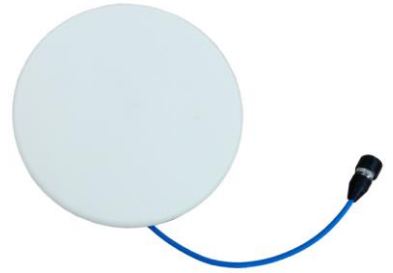

Low PIM Ultra Slim Ceiling Indoor Antenna (698-4000 MHz)
 Model: SP-ULC-5



Electrical Specifications					
Frequency Range, MHz	698-960	1690-2170	2300-2500	2500-2700	3300-4000
Gain, dBi	3.0	4.0	4.0	5.0	3.0
VSWR	≤1.8	≤1.8	≤1.8	≤1.8	≤2.0
Polarization	Horizontal				
PIM, 3rd Order, 2x20W	≤-140/-150/-153 dBc				
Horizontal Beamwidth	360°				
Vertical Beamwidth	120°	85°	76°	70°	62°
Input Impedance	50 Ω				
Max.Power	50 W				
Lightning Protection	DC Ground				
Mechanical Specifications					
Connector	N Female				
Dimensions	190 x 7.3 mm (7.3" x 0.28")				
Weight	0.25 kg				
Color	White				
Reflector Material	PCB				
Radome Material	ABS (UV Stabilized)				
Operating Temperature	-40°C to +65 °C				



For more information, please contact 1-888-889-8882 / sales@surepower.net
 or visit our website www.surepower.net