


HOW TO USE
YOUR



SEWING
MACHINE

Made in England by
E. L. GRAIN (SEWING MACHINES) LTD.
at their Nottingham factories.

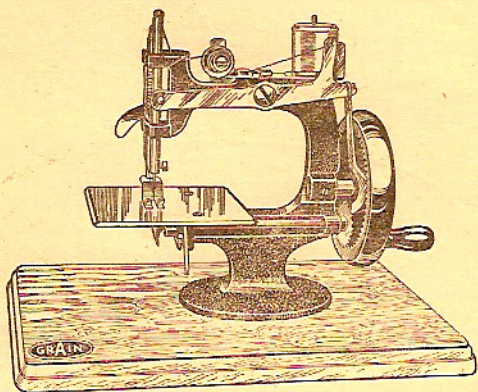


These instructions have been carefully prepared to help you to use your



SEWING MACHINE


so that you will find it easy to work and keep in good order.



*Have you already worked
a Sewing Machine ?*

You have !

Well, we still advise you
to read our instructions
carefully.



TENSION
ADJUSTING
NUT

NOTE : To ensure a clean start after threading, the machine should not be turned until the material has been placed under the foot.


FOOT
LIFTER

TURN WHEEL
IN
THIS DIRECTION

Before commencing to sew
always see that there is
 $1\frac{1}{2}$ ins. of cotton through
needle.

THREADING DIAGRAM

STITCH ADJUSTING LEVER

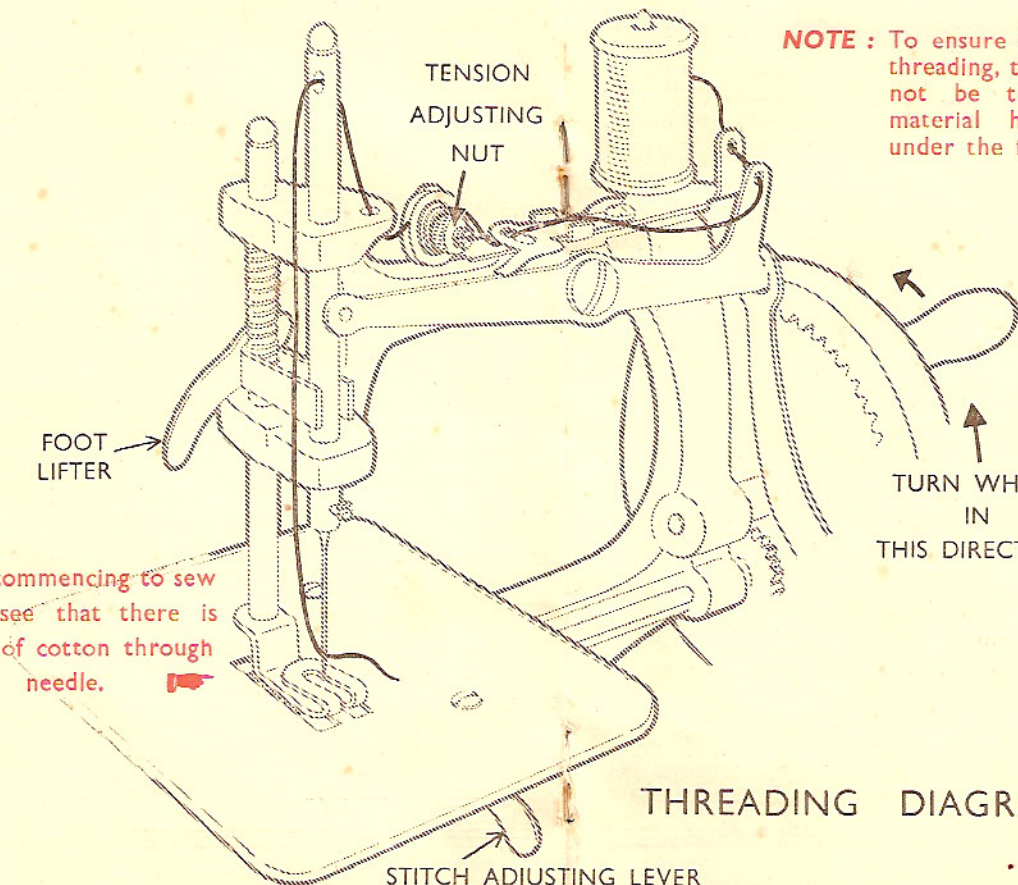



TO LOCK OFF THE STITCH


Pull out the LAST LOOP
on underside at the finish of
stitching.

TO UNDO STITCHING —

Pull loose end on underside at
finish of stitching.

LENGTH OF STITCH —

To shorten stitch pull Stitch
Adjusting Lever (*shown on
threading diagram*) towards you
and push in to lengthen stitch,
it may be found necessary to
alter tension slightly after
altering stitch length.




TENSION —

By turning Tension Adjusting
Nut (*See threading diagram*)
slightly in clock-wise direction
the stitch will be tightened.


To loosen, turn slightly in
opposite direction.

FITTING NEW NEEDLE—


When a new needle is fitted
make sure that the flat side of
the needle is to the screw, and
the needle is to the top of the
needle hole in the needlebar.




Oil
all moving parts
frequently



NEEDLES & SPARE PARTS



May be obtained through
the dealer who supplied
your

 Sewing Machine
he will also be pleased
to advise you and explain
about our repair service