

Beno J. Gundlach Company

211 North 21st Street • P.O. Box 544 Belleville, IL 62222 • U.S.A. TEL: 618 233-1781 • FAX: 618 233-3636

www.benojgundlachco.com









R





No. X01





Plastic Bucket and Tubs











| Item No. | Description | List Price | U/M | NWt |
|----------|---------------------------------|------------|-----|--------|
| 17GB | 17 GA Plastic Tub | \$42.95 | ea | 5.29 |
| 17T | Repl. 19 GA LEVMIX65 Mixing Tub | \$112.95 | ea | 8.33 |
| 25GB | 25 GA Plastic Mixing Tub | \$99.95 | ea | 5.69 |
| 8GB | 8 GA Plastic Bucket w/Handle | \$32.50 | ea | 3.99 |
| DC | Drill Chuck Adapter (X0 Mixer) | \$157.50 | ea | .50 |
| DLX120HF | Low Viscosity Mix Paddle (X01) | \$36.50 | ea | 2.80 |
| DLX152HF | Low Viscosity Mix Paddle (X04) | \$54.50 | ea | 3.48 |
| DX | Dust Extraction Vacuum Tool | \$66.89 | ea | .65 |
| FM60S | Low Viscosity Paddle (Drill) | \$13.50 | ea | .56 |
| HF | Hexafix Quick Coupling Adapter | \$36.95 | ea | .48 |
| KR120HF | Bird Cage Mixer Paddle (X01) | \$39.50 | ea | 1.74 |
| KR120S | Bird Cage Mixer Paddle (Drill) | \$39.50 | ea | 1.33 |
| KR140HF | Bird Cage Mixer Paddle (X04) | \$51.49 | ea | 2.25 |
| KRV130HF | Egg Shaped Mixer Paddle (X04) | \$51.95 | ea | 2.03 |
| LEVMIX65 | Heavy Duty Portable Mixer | \$2,729.00 | ea | 100.00 |
| LX120S | Low Viscosity Paddle (Drill) | \$21.50 | ea | 1.21 |
| SBR | Sharky Bag Ripper | \$78.20 | ea | 1.12 |
| VLX160HF | Repl. Paddle for LEVMIX65 | \$112.95 | ea | 3.79 |
| WK120HF | Universal Mixer Paddle (X01) | \$32.50 | ea | 2.44 |
| WK120S | Universal Mixer Paddle (Drill) | \$32.50 | ea | 1.86 |
| WK140HF | Universal Mixer Paddle (X04) | \$39.50 | ea | 2.70 |
| X01 | Hand Held Mixer and Paddle | \$329.99 | ea | 14.43 |
| X04 | Hand Held Mixer and Paddle | \$549.99 | ea | 18.38 |



Beno J. Gundlach Company
211 North 21st Street • P.O. Box 544
Belleville, IL 62222 • U.S.A.
TEL: 618 233-1781 • FAX: 618 233-3636
www.benojgundlachco.com

<u>Surfaces 2018 — Product Highlights</u>






No. MSF-636-1 Random Orbital Sander

This extremely powerful 6" random orbital sander from Fein Power Tools offers fast removal and up to 98% dust collection when used with a dust extractor. The 5/16" stroke enables high material removal and scratch free finishing. Has a durable metal gear head and the slim motor design makes it easy to handle. Hook and loop backer pad makes paper changing fast. Sander includes wrench set, grease, backer pad, side handle and nylon carrying bag. Three year parts and labor warranty with online registration.

| Specifications | |
|------------------------|---------|
| Power Consumption | 380 W |
| Vacuum Hose Connection | 11/4" |
| Power Cord | 16' |
| Stroke | 5/16" |
| Weight | 3.7 lbs |
| Pad Size | 6" |
| No Load RPM | 8,800 |
| Load RPM | 7,500 |

Sandpaper for No. MSF-636-1 Random Orbital Sander

These 6" premium aluminum oxide electro bonded sandpaper discs are made for fast removal and long life. Stearated zinc treatment helps prevent paper load up. Suitable for sanding and finishing wood flooring, stair treads and risers. Hook and loop backed C weight paper with 8 holes for dust extraction. Sold 50 discs per box.



| Item No. | Description | | |
|-------------|---------------------------------------|--|--|
| No. MSF-060 | 60 Grit MSF Sandpaper Discs (50/box) | | |
| No. MSF-080 | 80 Grit MSF Sandpaper Discs (50/box) | | |
| No. MSF-100 | 100 Grit MSF Sandpaper Discs (50/box) | | |
| No. MSF-120 | 120 Grit MSF Sandpaper Discs (50/box) | | |

Product Highlights Fein Power Tools Turbo II X Vacuums

The Fein Turbo II X premium class of vacuums combines everything you expect from a professional vacuum — powerful turbine, large 9.25 gallon capacity and extreme durability. These wet/dry vacuums cover the complete spectrum of debris from very fine dust to liquids. The AutoClean (AC) feature automatically cleans the filter every 15 seconds by a reverse air flow for interruption free work. The AutoClean feature can be turned off for wet vacuuming. There are 3 models to choose from depending on your needs.



| Technical Dat | a |
|----------------------|-----------|
| Maximum Power Input | 1,380 W |
| Suction (at blower) | 151 cfm |
| Vacuum Weight | 31 lbs. |
| Cable Length | 25' |
| Hose Length | 13' |
| Sound Pressure Level | 69 dB (A) |

| | Turbo II X | Turbo II X AC | Turbo II X AC HEPA* |
|--|-----------------|-----------------|---------------------|
| Specifications | No. 9-20-29-SET | No. 9-20-30-SET | 9-20-30-HEPASET |
| Automatic Filter Cleaning | X | 1 | 1 |
| PES Filter | 4 | 4 | Х |
| HEPA Filter | X | X | 4 |
| Full HEPA Certified | Х | X | 4 |
| *The Turbo II X AC HEPA I range, which exceeds the I | | | |

No. 3-13-45-274-010 HEPA Flat Pleated Filter

For use with the No. 9-20-30-HEPASET Vacuum, this 0.3 micron HEPA cartridge filter is made of polyester fleece with a special coating to help resist holding dust. Humidity resistant during wet applications.

No. 3-13-45-063-010 Disposable Bag

For use with the No. 9-20-30-HEPASET Vacuum, this disposable open design plastic liner bag collects dust and debris from vacuuming and the AutoClean feature of this vacuum. Sold 5 per pack.







FEIN Surface Grinding and Tuckpointing Guards

FEIN Tuckpointing Guard

Dust Collection Cover for Wider Kerfs 6 99 08 116 03 2

- Fits on selected 41/2" 5" high-speed angle grinders.
- Easy to install and replace blades.
- Accepts up to 5" diameter blades.
- Adjustable cutting depth.
- Maximum cutting depth 11/4".
- Rugged construction for heavy-duty applications.
- ▶ More than 90% of dust removal rate using vacuum.
- Perfect for tuckpointing and crack chasing.

Must be used with a vacuum!

Accessories Included:

1 surface grinding guard dust collector cover, connections for most 5" grinders, 1 collar, 1 base flange, spacers, 1 stainless steel hose clamp, 1 hex wrench, 1 operators manual, 1 rubber hose connector



FEIN Surface Grinding Guard

Dust Collection Cover for High-Speed Grinders 6 99 08 116 03 1

- Fits on selected 41/2" 6" high-speed angle grinders.
- Easy to install and replace grinding cup wheels.
- Accepts up to 5" diameter grinding cup wheels.
- Removable cover allows grinding to the edge.
- Suspended dust cover prevents dust from escaping.
- Clear cover for better visibility.
- Rugged construction for heavy-duty applications.
- ▶ More than 90% of dust removal rate using vacuum.
- Perfect for grinding and sanding concrete or surface preparation work.

Must be used with a vacuum!


Accessories Included:

1 surface grinding guard dust collector cover, connections for most $4\frac{1}{2}$ ", 5" and 6" grinders, 1 flange and locknut set for selected grinders, 1 stainless steel hose clamp, 1 hex wrench, 1 operators manual, 1 rubber hose connector

Beno J. Gundlach Company

211 North 21st Street P.O. Box 544 Belleville, IL 62222 • USA TEL: 618 233-1781 FAX: 618 233-3636

email: contact.us@benojgundlachco.com

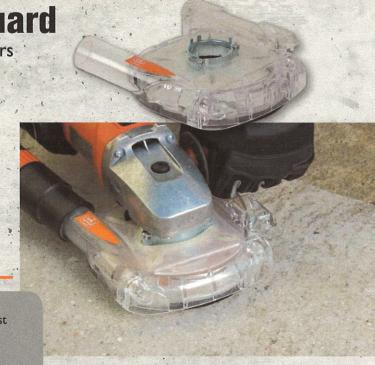

www.benojgundlachco.com



product release

NPR-3

from




Montolit Masterpiuma P3 'Push' Tile Cutters

The Masterpiuma P3 Series Tile Cutters represent the latest in tile cutting technology and have features that give industry leading professional performance. All seven of the Masterpiuma P3 Cutters have the 'push' scoring action which is preferred for large format tiles. Straight cutting length capacity ranges from 17" to 61" with the ability to cut from -45° to 45° and tile up to 7/6" thick. The extra long scoring handle rides on a rigid breaker rail and is spring loaded to automatically adjust for tile thickness. All seven P3 Cutters accept the optional No. 58-RM Rubber Mat for Mosaic Cutting, a great accessory for cutting glass mosaic tile as it prevents the tile from sliding and also scratching the paint on the tile back. Here are some more features of the P3 Cutters:

- Handle is almost 2" longer than most other cutters for best ergonomic design and is spring loaded to automatically adjust to tile thickness without the need to reset the breaker rail.
- Hard plastic blue breaker foot won't mark tile and is spring loaded for easy lowering for extra cutting leverage, or when cutting mosaic tiles.
- Front mounted shock absorber cushions the handle stop when scoring.
- Measurement square is mounted on a pivoting rod to swing up after cutting to make removal of the cut tile much faster and easier when making repetitive length cuts.
- Cutting guide is reinforced for strength and extends to 14" on the left and 18" (26" for the No. 63P3 and larger) on the right. All pivot from -45° to 45°, have a micro adjustment for an exact 0° setting and a large locking lever to hold the set position.
- Lens type scales on the cutting guide have large inch graduations, and are raised and angled toward the user for easy reading.
- Additional support for large tiles is provided by a swing out rod mounted on the right side (Nos. 63P3, 75P3 and 93P3) and fold out tables mounted on both sides (Nos. 125P3 and 155P3).

- Supplied with the No. 245T Titanium Carbide Wheel (14 mm diameter) which is easily changed in seconds without the need for any tools.
- Two storage pockets with snap caps are located at the front of each cutter to provide storage space for extra carbide wheels.
- A replaceable, small plastic vial of WD-40[®] lubricating oil is supplied and mounted on the handle for wheel lubrication. Oil facilitates the cutting of dense, highly textured tiles and glass tile.



- Spring loaded tables are each 51/2" wide x 131/4" long.
- Four each 11/8" diameter non slip rubber feet.
- Component disassembly is not required to put the cutter into the storage position. When the job is finished, both sides of the cutting guide are simply folded and locked within seconds.
- Smaller cutters can be slung over the shoulder for transport while the Nos. 125P3 and 155P3 have two wheels to facilitate transport.
- Available Optional Accessories:
 - No. 58-RM Rubber Mat for Mosaic Cutting A necessity for cutting mosaic and glass tiles to prevent slipping on the support tables and scratching the back of glass tile. The Mat can also be used on some other cutters.
 - No. 449P Additional Splitting System For added breaking pressure for large tiles up to ¾" thick.
 - No. 64-RMCG Rear Mount Cutting Guide Provides additional tile alignment as an assist in cutting long, narrow tiles.









| | Tile | | ng Capacity | Cutting | Spring- | Tile | | Net | |
|----------|--------------------|--------------|----------------|------------------------|------------------|--------------------------|-----------------------|------------------|------------|
| Item No. | Description | □ ‡ | | Guides (Left/Right) | Loaded Tables | Supports (Left/Right) | Breaking Bar Width | Weight (lbs.) | Price |
| 44P3 | 17" P3 Tile Cutter | 44 cm (17") | 31 cm (12") | 14"/18" | 2 | None | 7 mm | 17.55 | \$374.00 |
| 52P3 | 20" P3 Tile Cutter | 52 cm (20") | 37 cm (14") | 14"/18" | 2 | None | 7 mm | 18.55 | \$409.00 |
| 63P3 | 25" P3 Tile Cutter | 63 cm (25") | 44 cm (17") | 14"/26" | 2 | Rod (-/R) | 12 mm | 21.15 | \$454.00 |
| 75P3 | 29" P3 Tile Cutter | 75 cm (29") | 53 cm (21") | 14"/26" | 2 | Rod (-/R) | 12 mm | 26.15 | \$578.00 |
| 93P3 | 36" P3 Tile Cutter | 93 cm (36") | 66 cm (26") | 14"/26" | 2 | Rod (-/R) | 12 mm | 28.80 | \$659.00 |
| 125P3 | 49" P3 Tile Cutter | 125 cm (49") | 88 cm (341/2") | 14"/26" | 4 | Table (L/R) | 12 mm | 50.70 | \$1,093.00 |
| 155P3 | 61" P3 Tile Cutter | 155 cm (61") | 109 cm (43") | 14"/26" | 6 | Table (L/R) | 12 mm | 72.80 | \$1,415.00 |



Beno J. Gundlach Company

No. 58-RM Rubber Mat for Mosaic Cutting

This molded rubber mat is designed for use with the Masterpiuma P3 Series Tile Cutters to prevent mosaic tiles from sliding when scoring and breaking, making cutting much easier and more predictable. The mat also prevents scratching of the paint on the back of glass tiles. A full length %6" wide molded channel on the back of the mat holds it firmly in place over the cutter table breaker rail, and 45° and 90° lines on the mat face facilitate tile alignment. The mat also fits Montolit Minipiuma and Piuma Cutters, and many cutters produced by others. Has half centimeter graduations up to 15 cm on both sides, and is about 12" wide x 131%" long x 1%" thick.





No. P3-CVR Cover for Montolit P3 Cutters

This padded fabric cover protects the lower handle and front portion of the Masterpiuma P3 Series Tile Cutters. The cover fastens in two places behind the handle and has two bottom hooks to prevent it from accidentally sliding off. Has a heavy duty construction and sheds water.






Cover without Cutter

Cover with Cutter

No. VERTIGO2 Vertical Stand

This heavy duty folding stand is for use with either of the Nos. 125P3 (49") or 155P3 (61") Masterpiuma P2 and P3 Series Tile Cutters. The cutter is securely mounted to the stand in a vertical position to permit easier cutting of large format tile. The mounted cutter can still be used laid flat, and the stand also functions like a hand truck for easier cutter transport. Also included is a 1" wide supplemental straight cutting guide that gives additional tile support and protects the scales of the cutting guide on the cutter itself. This guide has a lens type scale and millimeter graduations with whole centimeter markings from 7 to 61 cm on the left side. Both the stand and cutting guide have all steel construction and a powder coat and/or plated finish. Weighs 30½ lbs.





No. 64-RMCG Rear Mount Cutting Guide

This all steel cutting guide mounts on the back end of the breaker rail and is a secondary cutting guide for easier and more accurate alignment of long cuts, such as baseboard cuts. Designed for use with all Masterpiuma 2 and 3 Series Tile Cutters, one side of the attachment bracket has a radiused area to allow mounting on other cutters, even those with round breaker rails. Maximum width is 6". Has a chrome plated finish for rust protection.





No. 449P Additional Splitting System

This heavy duty steel breaker foot is fixed over the breaker rail and the blue plastic breaker foot of the cutter handle acts over the wider steel breaker foot. This provides added breaking power on long or thick porcelain tiles up to $\frac{7}{8}$ " thick. Can be used with all Masterpiuma 2 and 3 Series Tile Cutters. The steel breaker foot portion is $\frac{4}{4}$ " wide x $\frac{3}{8}$ " thick and has a red powder coat finish.





No. 245T Titanium Carbide Wheel

This 14 mm diameter titanium coated carbide wheel is supplied with the Masterpiuma P3 Series Tile Cutters. It is also for use with the Piuma and Minipiuma Series Cutters. Supplied with an axle pin.





No. 515-5 Lubricating Oil for P3 Cutters

These soft plastic vials contain WD-40® lubricating oil for use when utting dense, highly textured tiles and glass tile to give better cutting performance. Simply lightly push on the flexible vial to direct oil onto the pipe cleaner type wick which then brushes oil onto the scoring wheel. For use with the Masterpiuma P3 Series Tile Cutters. Sold five vials (and two wicks) per package.





Minipiuma 'P' 'Push' Tile Cutters

The Minipiuma 'P' Series Tile Cutters are ideal for cutting smaller tiles such as in kitchens and bathrooms. Like the Masterpiuma P3 Series Tile Cutters, they feature the 'push' scoring action. They have a hard plastic blue breaker foot that won't mark tile, and is spring loaded for easy lowering when making angle cuts, or on mosaic tiles. Both cutters accept the optional No. 58-RM Rubber Mat for Mosaic Cutting (see the top of Page 2) which prevents mosaic tile from sliding and scratching the paint on the back of glass tiles. These cutters automatically adjust for height, cut tiles up to ¾" thick and are supplied with the No. 245T Titanium Carbide Wheel. Here are some more features of these cutters:

- Cutting guide extends to 5" on the left and 11" on the right. The cutting guide pivots from -60° to 45°, has a micro adjustment for an exact 0° setting and a locking lever to hold the set position.
- Lens type scales on the cutting guide have millimeter graduations with whole centimeter markings. A secondary scale with half centimeter graduations is used for making 45° angle cuts.
- A storage pocket with a snap cap is located at the front of the cutter for storing an extra carbide wheel.
- The handle has a port for applying lubricating oil (2 small containers of WD-40® are supplied) to the cutting wheel for use with dense, highly textured tile and glass tile.

- The base, handle and cutting guide are made from heavy duty die cast aluminum and have an attractive powder coat finish.
- Both of the two 3¾" wide x 9½" long spring loaded tables and the breaker rail are made of nickel plated steel.
- Has four each 3/4" diameter non skid rubber feet.
- A heavy duty blow molded plastic carrying case is supplied with the Nos. 26PB and 43PB Cutters. The case has two latches and the handle has a set of holes to accept a lock. The interior case top has a separate 7" wide x 10" long x 1" deep storage compartment with a snap lock lid.



| | | Tile Cuttin | ng Capacity | Net | | |
|----------|----------------------------------|-------------|-------------|------------------|------|----------|
| Item No. | Description | ‡ | | Weight (lbs.) | Case | Price |
| 26P | 14" Minipiuma Tile Cutter | 36 cm (14") | 25 cm (10") | 7.40 | No | \$270.50 |
| 26PB | 14" Minipiuma Tile Cutter w/Case | 36 cm (14") | 25 cm (10") | 13.15 | Yes | \$334.50 |
| 43P | 18" Minipiuma Tile Cutter | 45 cm (18") | 31 cm (12") | 8.00 | No | \$327.50 |
| 43PB | 18" Minipiuma Tile Cutter w/Case | 45 cm (18") | 31 cm (12") | 13.75 | Yes | \$391.50 |

No. S63 24" Combination Slalom Tile Cutter

The Combination Slalom Tile Cutter is a unique cutter capable of making curved cuts, either by following a free hand drawn line, or guided by a variable radius template. Straight and 45° cuts can also be made by locking the scoring handle in the central position so the cutter scores in a straight line. For both straight and curved cuts, the scored tile is moved to the far end of the cutter and positioned in the tile breaker mechanism. The large black knob of the tile breaker is then tightened until the tile separates through the force applied over the 31/2" wide non marking plastic breaker foot. The cutting guide and measurement square have millimeter graduations with whole centimeter markings. The right side of the 3/4" thick laminated hardwood table has a 91/2" long swing out angle bracket for additional tile support. Both the front and rear of the cutting table have a full width reinforcement bar to which four 1" diameter rubber feet are mounted to give a 3" table height for easy hand clearance in usage. Cutting capacity is 24" (90° Straight) and 17" (45° Diagonal) and up to 3/4" thick. Structural parts are steel and powder coated or plated. Supplied with a No. 242TS Titanium

No. SR000B Variable Radius Template

For use with he No. S63 Combination Slalom Cutter, this two-piece template system mounts on the cutter to permit curved cutting of the tile between 300 mm (11¾") to 3,000 mm (9' 10") radius. The system is comprised of a heavy duty plastic sheet that sits on the table of the cutter and an adjustable steel framework with a flexible guide bar that is set to the desired radius, this setting then secured in place by tightening five black knob screws. The plastic sheet has radius markings at 16 different radii, including the 300 mm minimum and the 3,000 mm maximum. The adjustable framework has a non skid rubber backing to prevent scratching of the cutter table. The flexible guide bar is made from two pieces of 1½" thick x 3½" tall plastic, and the structural components of the adjustable framework are powder coated or plated steel. Weighs 5½ lbs.


Carbide Wheel (20 mm diameter), an extra wheel can be stored in a recessed pocket with a snap cap top located near the tile breaker. Also included are complete usage instructions, including how to use the cutter with the No. SR000B Variable Radius Template. (See below, sold separately.) Weighs 41 lbs.

No. 242TS—20 mm Titanium Carbide Scoring Wheel with Holder
\$3895
\$91250
\$36250

Note: No. S63 Cutter and No. SR000B Template are sold separately.

No. 16-S Tile Lifter

The Tile Lifter can lift a large format tile directly from a carton or stack and set the tile onto the floor, needing only a minimum /8" grout joint for clearance. Once the tile is placed and the Tile Lifter is no longer under load, it is then easily released from the tile by rotating the handle 90° and lifting. The Tile Lifter is sturdily constructed of heavy gauge plated steel and can safely lift any thickness tile in sizes from 20" to 253/4". An open end 13 mm wrench is supplied for size adjustment. Sold each, but easy to use two at a time. Weighs 31/2 lbs.

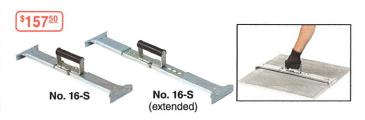


Parts for Masterpiuma P2, P3 and T2 Series Tile Cutters

General Notes for Montolit Cutters:

'P' Series Cutters are 'Push' type and 'T' Series Cutters are 'Pull' type. A numeral after the 'P' or 'T' indicates the version (evolution) level of the cutter. See also pages 1 and 2 for Masterpiuma

Cutters and related items. Other parts not shown below may also be available. Please contact us for assistance for such items.



| Code | Item No. | Description | Notes | Price |
|------|----------|-------------------|-------|----------|
| Α | 455P2 | 18" Cutting Guide | 1 | \$154.00 |
| В | 456P2 | 26" Cutting Guide | 2 | \$158.50 |
| C | 457P2 | 26" Cutting Guide | 3 | \$162.50 |
| D | 481P2 | Inch Scale Set | 4 | \$37.50 |

- 1. For Nos. 44P3 and 52P3 Cutters. Includes (D) (G).
- 2. For Nos. 63P3, 75P3 and 93P3 Cutters. Includes (□) (G).
- 3. For Nos. 125P3 and 155P3 Cutters. Includes (D) (G).
- 4. For Masterpiuma P2 and P3 Cutters. Five pieces per set. For use with (A), cut 26" label to about 18" long to fit.



| Code | Item No. | Description | Notes | Price |
|------|----------|---------------------------------|-------|---------|
| E | 428P2 | Measurement Square | 5 | \$37.50 |
| F | 459P | 6" Folding Guide | 6 | \$39.50 |
| G | 386P | Guide Connector Arch | 7 | \$33.00 |
| Н | 450P | Locking Lever for Cutting Guide | 8 | \$10.50 |

- 5. For Masterpiuma P2, P3 and T2 Cutters. Includes wing screw.
- For Masterpiuma P2, P3 and T2 Cutters. Includes wing screw and locknut.
- 7. For Masterpiuma P2, P3 and T2 Cutters. Includes 2 screws and 2 nuts.
- 8. For Masterpiuma P2 and P3 Cutters. Includes spring and cutting guide stop tab.

















| Code | Item No. | Description | Notes | Price |
|------|----------|------------------------------|-------|----------|
| - 1 | 505P3 | 7 mm Handle Assembly | 9 | \$125.00 |
| J | 506P3 | 12 mm Handle Assembly | 10 | \$133.00 |
| K | 507P3 | Breaker Foot and Hardware | 11 | \$33.00 |
| L | 510P3 | Handle Adjustment Roller Kit | 12 | \$33.00 |

- 9. For Nos. 44P3, 52P3 and 63P3 Cutters. Includes No. 245T Wheel, 1 vial of Lubricating Oil (1 of No. 515-5), (K) and (L).
- 10. For Nos. 75P3, 93P3, 125P3 and 155P3 Cutters. Includes No. 245T Wheel, 1 vial of Lubricating Oil (1 of No. 515-5), (K) and (L).
- 11. For Masterpiuma P3 Cutters. Includes 2 screws and spring.
- 12. For Masterpiuma P3 Cutters. Includes 2 rollers, screws and washers; and axle and housing.

| Code | Item No. | Description | Notes | Price |
|------|----------|-------------------------------------|-------|---------|
| M | 281P | Rubber Feet (5/set) | 13 | \$19.00 |
| N | 418P | Support Tables (2/set) | 14 | \$53.00 |
| 0 | 417P | Springs (4) and Pins (8) for Tables | 15 | \$12.95 |
| P | 430P3 | Axle and Wheels (2) | 16 | \$53.50 |

- 13. For Masterpiuma P2 and P3 Cutters.
- 14. For Masterpiuma P2. P3 and T3 Cutters. Includes (O).
- 15. For Masterpiuma P2. P3 and T3 Cutters.
- 16. For Nos. 125P3 and 155P3 Cutters. Includes 2 wheels and keepers; and axle.

Parts for Minipiuma 'P' and 'T' Series Tile Cutters















| Code | Item No. | Description | Notes | Price |
|------|----------|--------------------|-------|----------|
| Α | 452P | 11" Cutting Guide | 1 | \$TBD.00 |
| В | 458P | Inch Scale Set | 2 | \$TBD.00 |
| C | 429P | Measurement Square | 3 | \$TBD.00 |
| D | 264P | Handle Assembly | 4 | \$TBD.00 |

- 1. For Nos. 26P and 43P Cutters.
- 2. For Nos. 26P and 43P Cutters. Three pieces per set.
- 3. For Minipiuma 'P' (Push) and 'T' (Pull) Cutters. Includes wing screw.
- 4. For Nos. 26P and 43P Cutters. Includes No. 245T Wheel and (E).

| Code Item No. | | Description | Notes | Price | |
|---------------|------|------------------------|-------|----------|--|
| E | 448P | Breaker Foot Kit | 5 | \$TBD.00 | |
| F | 277P | Rubber Feet (5/set) | 6 | \$TBD.00 | |
| G | 280P | Support Tables (2/set) | 7 | \$TBD.00 | |

- 5. For Nos. 26P and 43P Cutters. Includes bolt, sleeve and locknut.
- 6. For Minipiuma 'P' (Push) and 'T' (Pull) Cutters.
- 7. For Minipiuma 'P' (Push) and 'T' (Pull) Cutters. Includes 4 springs and 2 pins.



product release

NPR-04

from

GUNDLACH

Montolit Diamond Drill Bits and Hole Saws

Small Diameter (%6" to ½") Diamond Drill Bits FAJ (Standard) and FTJ (Long Life) Series or Dry

These diamond drill bits can be used dry, or wet for increased speed and longer life. Both series can make holes in porcelain, ceramic and granite. The FAJ Series can also be used in marble and glass. Using a %" drill with a minimum 800 RPM (rotary only, no hammer action), holes from ¾6" to ½" diameter can be made up to 1%6" deep (FAJ) and 1¾6" (FTJ). Both series have a through hole for slug removal and three flats on the end to prevent slipping in a drill chuck. The FAJ Series has a diamond coated grit edge for fastest cutting. The FTJ Series has a diamond matrix that can be dressed and gives longer life. The FTJ Long Life Series gives about 50% increased life compared to the FAJ Standard Series. Best results are obtained by starting in a circular motion at 45° to the tile, then continuing the circular motion with a reduced angle, and using the No. M-PERFORMER Cooling Fluid shown at the top of Page 2. Drilling time and bit life depends on proper operator use, tile material and thickness, and bit cooling.





No. FTJ06 Long Life (Green)

FAJ Series shown

%" Drill 800 RPM Minimum (Rotary Only)

| Item No. (Standard) | Price | Diameter* | Price | Item No. (Long Life) |
|------------------------|---------|--------------|---------|-------------------------|
| FAJ05 | \$30.50 | 5 mm (¾16") | \$39.50 | FTJ05 |
| FAJ06 | \$30.50 | 6 mm (1/4") | \$42.50 | FTJ06 |
| FAJ08 | \$30.50 | 8 mm (5/16") | \$43.50 | FTJ08 |
| FAJ10 | \$30.50 | 10 mm (¾") | \$45.50 | FTJ10 |
| FAJ12 | \$33.75 | 12 mm (½") | \$57.00 | FTJ12 |

^{*}Diameters are true metric sizes with the approximate inch equivalent shown.

Large Diameter (34" to 434") Diamond Hole Saws

FS (Standard) and FT-S (Long Life) Series or Dry

These diamond hole saws can be used dry, or wet for increased speed and longer life. Both series can make holes in porcelain, ceramic and granite. The FS Standard Series can also be used in marble. Using a %-11 angle grinder with a minimum 11,000 RPM. holes from 3/4" to 43/4" (FS Standard Series, up to 13/4" deep) and made. The FS Standard Series has 5/16" tall diamond grit edge, while the FT-S Long Life Series has a 3/4" tall sector type diamond matrix for best cooling and that can be dressed for longer life. Both series have two through body slots (straight for the 3/4" diameter and V-shaped above 3/4") for slug removal, and also wrench flats on the hub. The FT-S Long Life Series gives about 50% increased life compared to the FS Standard Series. Best results are obtained by starting in a circular motion at 45° to the tile and then continuing the circular motion with a reduced angle. Drilling time and saw life depends on proper operator use, tile material and thickness, and saw cooling. With the No. ADPTR-AUFSIN Adapter, both series can be used with a %" drill (rotary only, no hammer action).



FS Standard



FT-S Long Life



FS Standard Series (Blue)



FT-S Long Life Series (Red)



| Item No. (Standard) | Price | Diameter* | Price | Item No. (Long Life) |
|------------------------|----------|---|----------|-------------------------|
| FS20IN | \$79.25 | 20 mm (¾") | \$143.50 | FT-S20IN |
| FS25IN | \$85.75 | 25 mm (1") | _ | _ |
| FS27IN | \$86.50 | 27 mm (11/16") | \$170.50 | FT-S27IN |
| FS30IN | \$86.75 | 30 mm (13/16") | _ | _ |
| FS35IN | \$90.95 | 35 mm (1%") | \$179.50 | FT-S35IN |
| FS40IN | \$98.50 | 40 mm (1½") | \$197.50 | FT-S40IN |
| _ | | 43 mm (111/16") | \$207.95 | FT-S43IN |
| FS45IN | \$106.50 | 45 mm (1¾") | _ | _ |
| FS50IN | \$114.50 | 50 mm (2") | \$225.95 | FT-S50IN |
| FS55IN | \$122.25 | 55 mm (23/16") | \$241.50 | FT-S55IN |
| FS60IN | \$130.25 | 60 mm (2¾") | \$249.50 | FT-S60IN |
| FS65IN | \$141.95 | 65 mm (2½") | \$263.50 | FT-S65IN |
| FS68IN | \$153.75 | 68 mm (2 ¹ 1/ ₁₆ ") | _ | |
| FS70IN | \$169.25 | 70 mm (2¾") | \$278.95 | FT-S70IN |
| FS75IN | \$174.95 | 75 mm (3") | _ | _ |
| FS100IN | \$279.50 | 100 mm (4") | _ | |
| FS120IN | \$323.95 | 120 mm (4¾") | _ | _ |

^{*}Diameters are true metric sizes with the approximate inch equivalent shown.



Beno J. Gundlach Company

No. M-PERFORMER Cooling Fluid

For small diameter FAJ/FTJ Bits

This cooling fluid is used with the small diameter (%6" to %") FAJ/FTJ Drill Bits to give longer bit life. To use, simply dip the stopped bit into the gel like cooling fluid for 2 seconds, repeating this about four to six times per %" deep hole. Supplied in a resealable jar and total weight is 3 oz.




No. M-PERFORMER

\$3175

FSB Series Diamond Hole Saws

Economical hole saws





No. FSB27IN 27 mm (11/16")



No. FSB35IN 35 mm (1%")

\$7695

Diamond Hole Saws for Glass

FAV Series (3/4" to 21/2")

These diamond matrix hole saws are for wet use only at low speed (not an angle grinder) on glass tile and can also be used on soft ceramic. Using the No. ADPTR-AUFA Adapter on a 3/8" drill (rotary only, no hammer action), holes from %" to 2%" diameter can be made up to 1%6" deep. Like the FT-S Series, these hole saws can be dressed. Each hole saw has a through hole for slug removal and wrench flats on the M16 x 2 mm threaded hub. Requires use of the No. ADPTR-AUFA M16 x 2 mm to %" Chuck Adapter, sold separately. For wet use only. For low speed use only. Not for use with high speed angle grinders.



Wer or Dry



FAV Series

| Item No. | Diameter* | Price |
|----------|----------------|----------|
| FAV20 | 20 mm (¾") | \$134.50 |
| FAV28 | 28 mm (11/16") | \$145.50 |
| FAV35 | 35 mm (1%") | \$153.75 |
| FAV51 | 51 mm (2") | \$178.50 |
| FAV65 | 65 mm (2½") | \$214.50 |

*Diameters are true metric sizes with the approximate inch equivalent shown.

Diamond Countersinks

Gives an attractive hole finish

Wer or Dry The FPS Series Countersinks are available in two sizes and are used to dress up the periphery of a drilled hole by removing the chipped edges. The FPS Series can be used on porcelain, ceramic, granite, marble and glass, either dry, or wet for increased life. Using a %-11 angle grinder with a minimum 11,000 RPM, holes from as little as %6" to as large as 3" can be countersunk. The solid steel body of both countersinks has a 120° angle, is diamond coated and has wrench flats on the hub. Tools cannot be dressed.





No. FPS35IN 3/16" to 13/8"

\$13450



No. FPS75IN 1%" to 3"

\$25195

Diamond Mill Bits

Enlarge and shape holes

The FPU Series Mill Bits are used to enlarge and shape holes in porcelain, ceramic, granite, marble and glass, either dry, or wet for increased life. Using a %-11 angle grinder with a minimum 11,000 RPM, holes as small as %" can be enlarged or shaped, and tile edges can also be shaped. For best life the entire 2" diamond coated height should be used. Tools cannot be dressed.







\$11195



No. FPU20IN 20 mm (3/4")

Adapters for Montolit Hole Saws

Permits use with %" drills and %-11 angle grinders

For those Montolit hole drilling systems with a metric thread, or when an accessory with an angle grinder thread is desired to be used with a %" (10 mm) drill, these adapters make it easy to do so. Adapters (A)-(C) have three flats on the shaft to prevent slipping in the drill chuck. All adapters are plated steel and have nexagonal wrench flats. Descriptions in the nearby table list the accessory internal thread first, followed by the tool (drill or grinder) attachment size/thread.










| Code | Item No. | Description | Price |
|------|--------------|-----------------------------------|---------|
| Α | ADPTR-AUFA | M16 x 2 mm to %" Chuck Adapter | \$22.75 |
| В | ADPTR-AUFS | M14 x 2 mm to %" Chuck Adapter | \$22.75 |
| C | ADPTR-AUFSIN | %-11 to %" Chuck Adapter | \$22.75 |
| D | ADPTR-188 | M14 x 2 mm to %-11 Thread Adapter | \$15.75 |



NPR-05

from

Montolit DIAMONDS NETWORK ARRANGEMENT Blades



The Diamonds Network Arrangement (DNA) is a revolutionary high technology system of arraying diamond particles for producing the Gold Line diamond tile blades by Montolit. The patented technology used to make these top of the line blades gives the perfect concentration and arrangement of the diamonds on the blade in a mass production process which was not possible with prior methods. The results of this DNA system are 30% faster cutting speed than the Silver Line ('Top'), 20% longer blade life than the Silver Line ('Top') and 50% longer blade life than the Red Line ('Professional') Montolit Series Blades for lower operational cost throughout the life of the blade.

SCX Series 'Segments' Rim Best selling blade for tile saws





SCX250

SCX300









These blades have 'segments' and are excellent for porcelain and granite, and also very good for marble. The 'segments' are slots in the blade that provide better cooling and cleaning for an improved cut. A No. SCX250 Blade is supplied with each Montolit F1 Series Tile Saw. For wet use only.



| ize | Arbor Sizes | Rim (HxW) | Price |
|-----|--------------------|--------------|----------|
| 7" | 5/8", 7/8", 1" | 8.0 x 2.2 mm | \$127.50 |
| | 5/8", 7/8", 13/16" | 8.0 x 2.2 mm | \$166.95 |
| 12" | 5/8", 7/8", 13/16" | 8.0 x 2.4 mm | \$200 50 |

The SCX Series is also known as ARIX™.

SCXS-T Series 'Segments' Rim Special SCX version for thick tiles















These blades are specially designed for cutting porcelain slabs and tiles up to 3/4" thick. The blades have a continuous rim with 'segments' and are excellent for porcelain and granite, and also very good for marble. The 'segments' are slots in the blade that provide better cooling and cleaning for an improved cut. When used for thick material, frequent use of a dressing stick is required to achieve maximum performance and life. For wet use only.

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|-----------|------|-------------------------------|--------------|----------|
| SCXS-T200 | | 5/8", 1", 13/ ₁₆ " | 9.0 x 2.0 mm | \$191.00 |
| SCXS-T250 | | 5/8", 1", 13/16" | 9.0 x 2.2 mm | \$234.50 |
| SCXS-T300 | 12" | 5/8", 1", 13/ ₁₆ " | 9.0 x 2.2 mm | \$261.00 |
| SCXS-T350 | 14" | 5/8", 1", 13/16" | 9.0 x 2.4 mm | \$344.00 |

The SCXS-T Series is also known as Silent-Top ARIX™.

CGX Series Continuous Rim Very thin kerf blades











These continuous rim blades are excellent for cutting porcelain and granite and are Montolit's best blades for use with angle grinders. They have a very thin kerf of 1.3 mm (.050") and give fast and accurate cuts on all tiles. All have a 2" diameter x .125" thick reinforced hub section for added blade rigidity and longer life.

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-------------|---------------|---------|
| CGX100 | 4" | 5/8", 7/8" | 11.0 x 1.3 mm | \$55.95 |
| CGX115 | 41/2" | 5/8", 7/8" | 11.0 x 1.3 mm | \$60.95 |
| CGX125 | 5" | 5/8", 7/8" | 11.0 x 1.3 mm | \$68.50 |

The CGX Series is also known as Freccia Oro.



Beno J. Gundlach Company

Montolit Diamond Tile Blades

CX Series Continuous Rim With 'Sandwich' technology





Item No.

CX250

CX300

CY250



12"



Rim (HxW)

10.0 x 2.0 mm

10.0 x 2.2 mm



\$158.95

\$184.95



These continuous rim blades have the 'Sandwich' technology design which has medium grain diamonds on the cutting edge for fast cutting, and fine grain diamonds on the sides to give a clean and perfect cut. The blades can be used on porcelain, granite and marble. For wet use only.

| CASSO | 14 | 78,1 | , 1716 | 10. | 0 X 2.2 111111 | \$245.95 |
|-----------|-------|------|--------|-----|----------------|----------|
| | | also | known | as | Diamond | Sandwich |
| Double G. | rain. | | | | | |

Arbor Sizes

5/8", 1", 13/16"

5/8", 1", 13/16"

CTX Series Continuous Rim For miter cuts with a very thin kerf











The special rim design of these continuous rim blades makes them excellent for miter cuts and helps clear dust from the cut tile. Excellent for porcelain and granite, and also good for marble, these blades have a very thin kerf of 1.3 mm (.050"). All have a 2" diameter x .200" thick reinforced hub section for added blade rigidity and longer life.

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-------------|---------------|---------|
| CTX100 | 4" | 5/8", 7/8" | 10.0 x 1.3 mm | \$50.50 |
| CTX115 | 41/2" | 5/8", 7/8" | 10.0 x 1.3 mm | \$55.50 |
| CTX125 | 5" | 5/8", 7/8" | 10.0 x 1.3 mm | \$71.50 |

The CTX Series is also known as Bistury 2.

TXH Series Turbo Rim For cuts up to 1" thick









The TXH Series blade is specially designed for cutting porcelain and granite, roof tiles and bricks and will also cut marble up to 1" thick. The rim height is effectively increased beyond 10.0 mm by the four M-shaped areas to permit easier deep cutting.

Item No. Size Arbor Sizes Rim (HxW) Price **TXH115** 41/2" 5/8", 7/8" 10.0 x 2.4 mm

The TXH Series is also known as ARIX™.

CM Series Continuous Rim For porcelain and glass mosaic









| These continuous rim blades have fine grain dia- |
|---|
| monds to give best cutting with porcelain and glass |
| mosaic tiles. These blades also cut aluminum |
| mounted in mosaic tiles. |

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-------------|---------------|---------|
| CM100 | 4" | 5/8", 7/8" | 10.0 x 1.2 mm | \$58.50 |
| CM115 | 41/2" | 5/8", 7/8" | 10.0 x 1.2 mm | \$61.50 |
| CM125 | 5" | 5/8", 7/8" | 10.0 x 1.2 mm | \$63.95 |

The CM Series is also known as Mosaic Cut 2.

TCS-R Series Turbo Rim Versatile blades with a thin kerf

RED LINE















No. TCS100R



No. TCS250R

These turbo rim blades are versatile and can be used to cut all types of tile, including porcelain, granite and marble. They have a thin kerf and the broadest size range, from the 3%" diameter No. TCS85 'Squardo' Blade used for electrical outlet cuts to the 14" diameter No. TCS350R Blade. All blades, except the No. TCS85 Blade, have a 2" diameter x .100" thick reinforced hub section for added blade rigidity and longer life. Because of its small diameter, the No. TCS85 Blade has no reinforced hub section. In order for the clamping flange of an angle grinder to fully tighten, a 11% OD x % ID x .036 thick brass shim is supplied with the No. TCS85 Blade. Holes in the body of the Nos. TCS85 (3%") TCS250R (10"), TCS300R (12") and TCS350R (14") Blades help keep these blades cool.

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-----------------|---------------|----------|
| TCS85 | 3%" | 5/8", 7/8" | 7.0 x 1.0 mm | \$34.95 |
| TCS100R | 4" | 5/8", 7/8" | 7.0 x 1.4 mm | \$35.95 |
| TCS115R | 41/2" | 5/8", 7/8" | 7.0 x 1.4 mm | \$48.50 |
| TCS125R | 5" | 5%", 7%" | 7.0 x 1.4 mm | \$52.25 |
| TCS250R | 10" | 5%", 1",13/16" | 7.0 x 1.65 mm | \$155.75 |
| TCS300R | 12" | 5/8", 1",13/16" | 7.0 x 1.8 mm | \$210.75 |
| TCS350R | 14" | 5%", 1",13⁄16" | 7.0 x 2.0 mm | \$247.25 |

The No. TCS85 is also known as Squadro. The other TCS-R Series Blades are also known as Bistury Turbo.

Montolit Diamond Tile Blades

CPH Series Continuous Rim Fastest cutting blades



RED LINE













These continuous rim blades have really fine grain diamonds for a very clean cut and are the fastest cutting blades. They are excellent for cutting porcelain and very good for granite and marble. For wet use only.

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|------|------------------|----------------|---------|
| CPH180 | 7" | 5/8", 7/8", 1" | 10.0 x 1.6 mm | \$61.95 |
| CPH200 | 8" | 5/8", 1", 13/16" | 10.0 x 1.6 mm | \$92.50 |
| CPH250 | 10" | 5/8", 1", 13/16" | 10.0 x 1.65 mm | \$95.95 |

The CPH Series is also known as Xamuray.

CPF Series Continuous Rim Gives a perfect factory cut edge



These continuous rim blades have fine grain diamonds and will give a perfect factory cut edge. They are excellent for cutting glass and porcelain, very good for marble and also good for granite. These blades also cut aluminum mounted in mosaic tiles. These blades require slow cutting by not forcing the tile into the blade. Frequent use of a dressing stick is required to achieve maximum performance and life. For wet use only.











| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|----------|------------------|---------------|-------|
| CPF180 | 7" | 5/8", 7/8", 1" | 10.0 x 2.0 mm | |
| CPF200 | 8" | 5/8", 1", 13/16" | 10.0 x 2.0 mm | |
| CPF250 | 27942000 | | 10.0 x 2.0 mm | |

The CPF Series is also known as Perfetto.

CPV Series Continuous Rim Specifically for glass with a thin kerf



These continuous rim blades are designed to give clean, chip-free cuts in glass tile. They have finest grain diamonds and a chisel point rim edge to give excellent results on glass mosaic tile and are also very good for porcelain mosaic tile. These blades require slow cutting by not forcing the tile into the blade. Frequent use of a dressing stick is required to achieve maximum performance and life. Not for use cutting aluminum mounted in mosaic tiles. For wet use only.











| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|------|-------------------------------|--------------|----------|
| CPV100 | 4" | 5/8", 7/8" | 7.0 x 1.4 mm | \$177.50 |
| CPV180 | 7" | 5/8", 7/8", 13/16" | 7.0 x 1.6 mm | \$251.95 |
| CPV200 | 8" | 5/8", 1", 13/ ₁₆ " | 7.0 x 1.6 mm | \$274.95 |
| CPV250 | 10" | 5/8", 1", 13/16" | 7.0 x 1.9 mm | \$308.95 |

The CPV Series is also known as CP Vetro.

ED Series Segmented Rim For marble and fiberglass



These segmented rim blades have a diamond grit edge and are excellent for cutting marble and fiberglass. The rim height is effectively increased beyond 3.0 mm by the four $\frac{1}{8}$ W x $\frac{1}{8}$ L diamond grit 'bars' to permit easier deep cutting.







| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-------------|--------------|---------|
| ED115 | 41/2" | 5/8", 7/8" | 3.0 x 2.5 mm | \$63.95 |
| ED125 | 5" | 5/8", 7/8" | 3.0 x 2.5 mm | \$69.50 |

The ED Series is also known as Electroplated.

CSE Series Continuous Rim Economical universal blade



SILVER LINE









The CSE Series blade is an economical blade, and is for universal use on all types of tiles.



The CSE Series is also known as Blu-Line.

CZ Series Continuous Rim Economical for thin tiles











These continuous rim blades are excellent for ceramic tile, very good for porcelain and are also good for granite and marble. They are economical, have a thin kerf and give their longest life on thin tiles.

These turbo rim blades are versatile and can be used to cut all types of tile. They are excellent for porcelain, good for granite and will cut marble. They are economical, have a thin kerf and give their longest life on thin tiles. Holes in the body help keep

| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-------------|--------------|---------|
| CZ100 | 4" | 5/8", 7/8" | 7.0 x 1.4 mm | \$20.75 |
| CZ115 | 41/2" | 5/8", 7/8" | 7.0 x 1.4 mm | \$21.15 |
| CZ125 | 5" | 5/8", 7/8" | 7.0 x 1.4 mm | \$25.50 |

The CZ Series is also known as Greenline.

TCS-E Series Turbo Rim Economical blades with a thin kerf









| Item No. | Size | Arbor Sizes | Rim (HxW) | Price |
|----------|-------|-------------|--------------|---------|
| TCS100E | 4" | 5%", 7%" | 7.0 x 1.4 mm | \$23.30 |
| TCS115E | 41/2" | 5%", 7%" | 7.0 x 1.4 mm | \$24.75 |
| TCS125E | 5" | 5/8", 7/8" | 7.0 x 1.4 mm | \$27.50 |

The TCS-E Series is also known as Greenline.

TUTORCUT Sawing Guides

Easily make perfect 90° cuts

The patented Tutorcut Sawing Guides have a guide wheel that mounts on an angle grinder spindle to give a perfect 90° cut. Available in two diameters, each has a 1/2" wide white nylon guide wheel with a hermetically sealed ball bearing. The guide wheel bears on the tile and rotates with the sawing progress over the tile, while the balls in the bearing rotate with the grinder revolutions. Not only are consistent depth cuts easily made, but the grinder weight now bears on the tile, and not supported by the user, for less fatigue. Blades also last longer as there is less binding caused when the cut angle is varied as can easily happen when freehand sawing.

the blade cool.




| Item No. | Size (OD x ID x Width) | Maximum Depth of Cut (for Blade Size) | Price |
|----------------|---------------------------|---|---------|
| TUTORCUT115-16 | 3" x 5%" x 3%" | 1/2" (4") | ¢00.05 |
| 1010HC01115-16 | 3 X 78 X 78 | 3/4" (41/2") | \$69.95 |
| TUTORCUT125-16 | 03/11 × 5/11 × 3/11 | 1/2" (41/2") | |
| 1010HC01125-16 | 3%" x %" x %" | 3⁄4" (5") | \$73.95 |



No. TUTORCUT125-16





STL Series Diamond Wheels

For grinding, cutting and polishing tiles

These STL Series Diamond Wheels have face and edge mounted diamond grains to grind, cut, bevel and polish tiles. The blades are for use on a 5/4-11 angle grinder and have wrench flats on the hub. Both the fine and medium grain blades can be used on all types of tile including porcelain, granite and marble. The medium grain can also be used on concrete, while the fine grain can also be used on glass. Holes in the face help keep the blade cool and allow the dust to escape.







| Item No. | Size | Grain | Hub Color | Price |
|------------|-------|--------|-----------|----------|
| STL115GFIN | 41/2" | Fine | Gray | \$127.95 |
| STL125GFIN | 5" | Fine | Gray | \$132.95 |
| STL115GGIN | 41/2" | Medium | Red | \$127.95 |
| STL125GGIN | 5" | Medium | Red | \$132.95 |



No. STL125GFIN



No. STL125GGIN

No. 395BJ Dressing Stick for Diamond Tools

This Montolit Dressing Stick is a white stone used to expose new diamond cutting edges on diamond drill bits, hole saws and tile blades. Stick is about $2" \times 3" \times 3''$ thick and can be used wet or dry.



Diamond Polishing Hand Pads

For smoothing cut tile edges

These diamond polishing hand pads are available in both a 60 grit (medium, blue) for porcelain and granite tiles, and a 200 grit (fine, red) for marble and glass. Single sided diamond surfaces are mounted on a dense sponge body with finger grooves along the 3" edge for easy gripping. Can be used wet or dry. For longest life and best results, use the entire diamond surface. Available individually and also as a package of one of each grit. Each pad is about 2" W x 3" L x 1" T.



No. DT060 — 60 Grit Medium Polishing Pad No. DT200 — 200 Grit Fine Polishing Pad

No. DT262 — 60 Grit (1) and 200 Grit (1) Polishing Pads (1 each/package)

Diamond Polishing Pads

For shaping and polishing cut tile edges

These 4" diameter diamond polishing pads are used to shape and polish cut edges on porcelain, granite, marble and glass tiles. The polishing pads are available in four grit ranges, and also the No. PDR-KIT Polishing Pad Kit, a set of one each of Nos. PDR-1, PDR-2 and PDR-3 Pads. Made of a hard plastic, the No. PDR-IN Rigid Plastic Backer Pad has a %-11 thread in a brass hub with wrench flats and a 'hook' face to attach to the 'loop' back of the pads. For use with an angle grinder between 2,500 to 4,000 RPM. To use any diamond polishing pad, a No. PDR-IN Backer Pad is required. The four diamond polishing pads, the No. PDR-KIT Polishing Pad Kit and the No. PDR-IN Backer Pad are sold separately.









| Item No. | | Grit | | | |
|----------|-----------|-------------|--------|---------|--|
| nem No. | No. | Description | Color | Price | |
| PDR-0 | 30-60 | Coarse | Purple | \$41.50 | |
| PDR-1 | 50-80 | | Green | \$41.50 | |
| PDR-2 | 400-600 | ↓ | Red | \$41.50 | |
| PDR-3 | 1000-1500 | Fine | Blue | \$41.50 | |










\$11750









Beno J. Gundlach Company
211 North 21st Street • P.O. Box 544
Belleville, IL 62222 • U.S.A.
TEL: 618 233-1781 • FAX: 618 233-3636
www.benojgundlachco.com



product release

NPR-06

from

GUNDLACH

Montolit Gauged Porcelain Tile and Panel/Slab Tools

No. 300-FL Flash Line Cutting System

Easily and accurately cuts without suction cups


The Montolit Flash Line System is the best way to easily and accurately cut gauged porcelain tiles and panels/slabs. A spring loaded trolley with a 7 mm diameter titanium coated carbide wheel rides over three 120 cm (47¼", 48" nominal) long interlocking aluminum rail bars to score the tile. The small diameter of the wheel gives the best possible score on textured tiles, helping to ensure a clean, straight cut. The wheel can be lubricated by removing a small set screw on the top of the wheel holder of the trolley. The tile is then easily cut with an adjustable cutting pliers.


Other features include:

- The 4" wide aluminum rail bars are securely held in position by three rows of replaceable rubber gripper beads that run the entire 48" length of each rail bar. The rail bars latch together and are easily moved, then securely held in their desired position with the pressure applied during the scoring process.
- Supplied with the No. 240T Titanium Carbide Wheel mounted on the scoring trolley, 3 each 48" long aluminum rail bars, No. 56RJ 10 mm (%") Cutting Pliers, No. 300-FL-01 Storage Bag with shoulder strap and usage instructions. Weighs 20 lbs.
- · Parts and available accessories are shown below.
- Must be used on a well supported surface like the No. 300-15 Tile/Slab Bench.






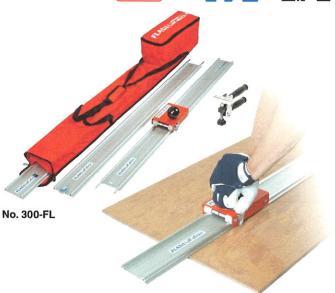

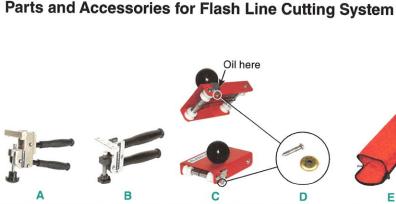

| Code | Item No. | Description | Notes | Price |
|------|-----------|------------------------------|-------|----------|
| Α | 56RJ | 10 mm (%") Cutting Pliers | 1 | \$149.95 |
| В | 56R | 20 mm (¾") Cutting Pliers | 2 | \$198.50 |
| C | 300-FL-03 | Scoring Trolley w/240T Wheel | 3 | \$173.50 |
| D | 240T | Titanium Carbide Wheel | 4 | \$12.75 |

- 1. Supplied with the No. 300-FL Flash Line.
- 2. Optional Cutting Pliers for tile up to 20 mm (¾") thick.
- 3. Supplied with the No. 300-FL Flash Line. Includes (D).
- 4. Supplied with (C). Includes the axle pin.

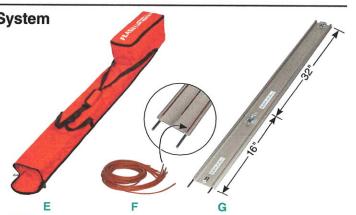

| Code | Item No. | Description | Notes | Price |
|------|-----------|-----------------------------|-------|----------|
| E | 300-FL-01 | Bag for 300-FL Flash Line | 5 | \$83.00 |
| F | 300-FL-02 | Gripper Bead for Flash Line | 6 | \$56.50 |
| G | 300-FL-08 | 2-Piece Extension (300-FL) | 7 | \$226.50 |

- 5. Supplied with the No. 300-FL Flash Line.
- 6. Replacement Gripper Bead for Flash Line Aluminum Rail Bars (9 pieces at 48" long each).
- 7. 2-Piece Aluminum Rail Bar Extensions, 40 cm and 80 cm long (15¾" and 31½", 16" and 32" nominal).



Beno J. Gundlach Company

No. MOTO-300-FL 'Moto' Flash Line Sawing System

Easily dry saw porcelain and stone

The Montolit 'Moto' Flash Line System easily dry saws porcelain, granite and marble on the job site with the benefit of dust collection. Using three 120 cm (471/4", 48" nominal) long interlocking aluminum rail bars, cuts up to 134" long and 3/4" thick can be made. The 'Moto' Flash Line can also make internal rectangles, or any other combination of straight line cuts. The 115v saw unit uses a 6" diameter blade and operates at 1,600 watts (2.1 HP) at 5,000 RPM counterclockwise through a 6% 16/2 cord and is double insulated for safety. The saw has a die cast aluminum blade cover and also a spring loaded retractable blade guard. The depth of cut is adjustable up to 3/4" by turning a knob screw at the back of the saw. The saw is supplied with the No. TCS150MFL Blade with a $30\,\text{mm}\,(1\%\text{e}^{\text{"}})$ arbor hole and has a 7.0 mm rim height and a 1.4 mm rim thickness. This blade is a turbo rim style with cooling holes, in the line of the TCS-R Series Blades shown on Page 2 of NPR-05. The dust port on the saw accepts the No. 3-13-45-079-010 Step Adapter shown on Page 67 of Catalog No. 128.

- Supplied in two cartons, the saw unit includes a 6 mm hex key wrench for blade changing, and also a padded fabric storage bag with both strap handles and a shoulder strap.
- The saw unit bag also holds the wire cradle that mounts in a plain end of an aluminum rail bar to hold the saw at the start or end of the cut, also applying pressure to fix the aluminum rail bar end in position.
- The three aluminum rail bars are supplied in a fabric storage bag with a shoulder strap. Illustrated usage instructions are included. The saw unit in its bag weighs 141/4 lbs., and the aluminum rail bars in their bag weigh 12¾ lbs.
- Parts and available accessories are shown below.
- Must be used on a well supported surface like the No. 300-15 Tile/Slab Bench.




Blades and Accessories for 'Moto' Flash Line Sawing System

Thin Porcelain

\$146.00



10.0 x 2.4 mm Thick Porcelain, Granite The No. TCS150MFL Blade (f A) is supplied with the No. MOTO-300-FL Flash Line System. All three blades have a 6" diameter, are the Montolit Red Line 'Professional' Series with arbor sizes of 1/6" and 11/6", and are suitable for dry use. The Nos. TCS150MFL (f A) and TBH150 (f C) Blades are a Turbo Rim type. The No. CS150MFL (B) Blade is a Continuous Rim type.

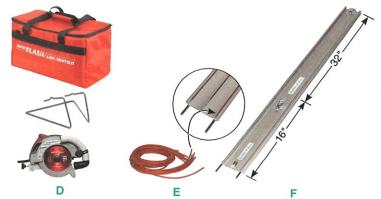


| Code | Item No. | Description | Notes | Price |
|------|----------------|-------------------|-------|------------|
| D | MOTO-300-FL-PU | Power Unit Only | 1 | \$1,276,50 |
| E | 300-FL-02 | Gripper Bead | 2 | \$56.50 |
| F | 300-FL-08 | 2-Piece Extension | 3 | \$226.50 |

- 1. Supplied with the No. MOTO-300-FL Moto Flash Line. Includes the 115v saw unit, No. TCS150MFL Blade, wire cradle, wrench, padded fabric storage bag and instructions. Can be used with the No. 300-FL Flash Line Cutting System.
- 2. Replacement Gripper Bead for Flash Line Aluminum Rail Bars (9 pieces at 48" long each).
- 3. 2-Piece Aluminum Rail Bar Extensions, 40 cm and 80 cm long (15 3/4" and 311/2", 16" and 32" nominal).

C

TBH150

Montolit Gauged Porcelain and Panel/Slab Handling Tools

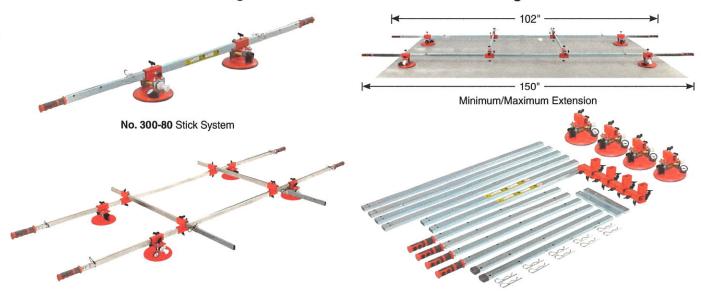

No. 300-70 Superstick System

The Montolit Stick and Superstick units are a safe and secure method for handling gauged porcelain tiles and panels/slabs. Both units utilize 8" diameter suction cups to safely hold tiles and have an adjustment range from 102" to 150". All structural components are plated tubular steel to best resist flexing with resultant load loss, an issue for more flexible systems with aluminum construction. Four overall length adjustments can be made from 102", 114", 129" up to 150" on each unit. These adjustments are fixed in place with heavy duty hairpin cotter pins that eliminate the possibility of unexpected slipping, or even dropping. The No. 300-70 Superstick also comes with two cross bars with adjustable (6", 13½" and 24¼"

additional extension) kickstand legs for leaning the held tile against

a wall without resting on the lower edge of the tile. Each suction

Components for No. 300-70 Superstick (Longest pieces are 48")

cup is securely fastened in position to its tubular steel member through a powder coated steel bracket by tightening two large know screws. These 8" suction cups have a gauge showing the vacuum in cm Hg with a red (danger) zone below the 44 cm Hg reading. Correlating with this 44 cm Hg reading is an easily visible 1%" wide band that runs around the white plunger body. If this red band is visible, then either the suction cup is losing vacuum, or sufficient vacuum has not yet been achieved. Each suction cup has a shielded release trigger to prevent accidental loss of the vacuum. Each handle of both units easily assembles with only two socket flat head screws with a provided 4 mm hex key wrench. Structural members and brackets fit into a 48" long carton, while suction cups are packaged 2 each per carton.

| Item No. | Description | Suction Cups | Capacity | Weight | Price |
|----------|-------------------|--------------|----------------|------------|------------|
| 300-80 | Stick System | 2 | 40 kg/88 lbs. | 201/2 lbs. | \$1,015.95 |
| 300-70 | Superstick System | 4 | 80 kg/176 lbs. | 71 lbs. | \$2,345.00 |

^{*2} each or 4 each No. 300-71 Suction Cups are supplied as shown. For the No. 300-70 Superstick, we recommend purchasing an additional 2 each for a total of 6 each.

Parts and Accessories for Stick and Superstick



| Code | Item No. | em No. Description | | Price |
|------|----------|----------------------------------|---|----------|
| Α | 300-77 | Safety Hooks for Rough Surfaces | 1 | \$358.50 |
| В | 300-71 | Suction Cup for Stick/Superstick | 2 | \$425.50 |
| C | 300-76 | Suction Cup | 3 | \$262.95 |
| D | 300-76C | Snap-on Cap for 300-71/300-76 | 4 | \$18.50 |
| E | 300-71P | Fabric Cover for 300-71/300-76 | 5 | \$10.50 |

- Optional Safety Hooks for use with rough slabs. Can be used with both the Nos. 300-80 Stick and 300-70 Superstick. Sold 4 per set.
- 2. Supplied with the Nos. 300-80 Stick and 300-70 Superstick.
- Optional 8" Suction Cup. Same as the No. 300-71 Suction Cup, but without the Stick/Superstick attachment bracket and hardware to permit hand use.
- This red flexible plastic cap is supplied with the Nos. 300-71 and 300-76 Suction Cups.
- This black fabric cover is supplied with the Nos. 300-71 and 300-76 Suction Cups.

| | | \sim | | |
|---|---|--------|---|---|
| F | G | н | 1 | J |

| Code | Item No. | Description | Notes | Price |
|------|-----------|------------------------|-------|---------|
| F | 30942 | Wing Screw | 6 | \$2.95 |
| G | 30943 | Knob Screw | 7 | \$2.95 |
| H | 30901 | Hairpin Cotter Pin | 8 | \$2.95 |
| -1 | 44272 | Black End Cap | 9 | \$2.95 |
| J | 300-70-AF | Adjustable Feet (2/st) | 10 | \$69.95 |

- Wing Screw for Nos. 300-80 Stick, 300-70 Superstick and 300-71 Suction Cup (top).
- 7. Knob Screw for Nos.300-71 Suction Cup/300-77 Safety Hooks (sides).
- 8. Hairpin Cotter Pin for Nos. 300-80 Stick and 300-70 Superstick.
- Black plastic end cap is supplied with each Cross Bar of the No. 300-70 Superstick.
- 10. Optional Adjustable Feet allow small adjustments of .042" per revolution over an approximate 2" range. A 1/4" x 3 3/4" long turning assist bar is included. Sold 2 per set.

Note: Other parts not shown above are also available.




No. 300-15 Large Format Tile and Slab Bench

Provides excellent support for cutting and sawing large tiles, panels and slabs

Easily assembled without tools, this bench provides excellent support for cutting and sawing large gauged porcelain panel tiles and slabs. The bench is an open style table composed of six extruded aluminum support rails, each rail about 71" long x 2½" wide with an approximate 4" space between rails. The support rails attach to the heavy duty formed steel cross bars with screws mounted on the underside of the support rails, using a hand tightened small black knob to secure. Each cross bar also has two leg sockets to accept the tubular steel legs, each with a 11%" diameter swiveling, height adjustable and lockable rubber foot pad for solid support. The legs fasten to the cross bar with a carriage bolt and a large black knob.

Other features include:

- The position of the screws on the underside of the support rails can be adjusted anywhere along the length of the support rail to adjust the spacing between the cross bars and legs.
- The second support rail in from each side can also be adjusted across the cross bar to increase the space between the second and third rails up to 7½" for saw blade clearance.

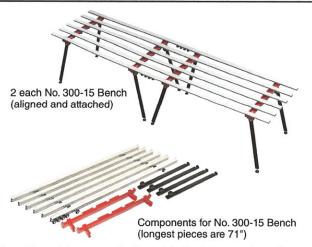

- The minimum vertical saw blade clearance from the top of the support rails is ½" to the top of the cross bars, and increases to 1½" over both sides of the adjustable 'second' rails.
- The topside of each support rail has a T-Slot that accepts a No. 10 (hex or square) nut to allow mounting of a rip fence along a support rail, or a stop across multiple support rails.
- Each bench is also supplied with an 8" long splice assembly that attaches to the underside of a support rail and permits two or more benches to align and lock together.
- The aluminum support rails have an anodized finish, the steel cross bars have a red powder coat finish and the steel legs have a black powder coat finish.
- The assembled bench measures 70%" L x 35%" W x 32%" H, has a load capacity of 330 lbs. and weighs 64 lbs. Supplied in two cartons, the six support rails are in one carton and the remaining items are in the other.

No. 300-15EXT 12" Extensions for No. 300-15 Bench

These heavy duty formed steel extensions can be mounted to any cross bar end of the No. 300-15 Bench. Each extension is 3" wide and extends the bench width by 12". They attach using existing hardware supplied with the bench, and have a $2^{3/4}$ " W x 6" L foam pad affixed to the top. Sold as a set of two. Weighs $4^{1/2}$ lbs. per set.





No. 300-85 Cart for Tile Panels and Slabs

Safely transports gauged porcelain tile panels and slabs

This heavy duty cart will safely transport gauged porcelain panels and slabs, either loose stacked, or with the Montolit Stick or Superstick Tile Handling Tools attached. The upright cradle is easily fixed into two positions by two knob screws. In one position, loose stacked panels/slabs rest against the foam padded member of the upright cradle on the composite wood support (55½" wide 11¾" deep), restrained from sliding by two ½" diameter x 1½" tall hard plastic stops. In the other position, the foam padded hooks allow the No. 300-70 Superstick, or the No. 300-80 Stick, Handling Systems to be moved with an attached panel/slab.

Other features include:

- The cart is constructed of tubular steel, has a red powder coated finish and moves easily on four ½" wide x 6" diameter swiveling casters with hard rubber wheels. Two of the four casters have easily operated foot lock/unlock tabs.
- Shipped knocked down, the entire cart has only 12 threaded fasteners, and easily assembles in 15 minutes without the need for any foul language! Supplied with illustrated assembly instructions and a 17 mm open wrench.
- The assembled cart is 60½" L x 27½" W x 59½" H, has a load capacity of 572 lbs. and weighs 73½ lbs.





ProWedge Leveling System











No. PRLW-3

ProLeveling System









No. PRST







| Item No. | Description | List Price | U/M | NWt |
|----------|---------------------------------|------------|-----|------|
| PRLW | Universal ProWedge (100/bag) | \$13.60 | bg | 1.78 |
| PRLW-1.5 | 1.5 mm Yellow Leveler (200/bag) | \$20.00 | bg | 1.32 |
| PRLW-3 | 3 mm Gray Leveler (200/bag) | \$20.00 | bg | 1.46 |
| PRLWP | ProWedge Level System Pliers | \$36.95 | ea | .77 |
| PRSC-1 | 1 mm Cross Levelers (100/bag) | \$37.00 | bg | .77 |
| PRSC-2 | 2 mm Cross Levelers (100/bag) | \$37.00 | bg | .83 |
| PRSC-3 | 3 mm Cross Levelers (100/bag) | \$37.00 | bg | .86 |
| PRSC-5 | 5 mm Cross Levelers (100/bag) | \$37.00 | bg | .86 |
| PRSL-1 | 1 mm Linear Levelers (100/bag) | \$27.50 | bg | .66 |
| PRSL-2 | 2 mm Linear Levelers (100/bag) | \$37.00 | bg | .72 |
| PRSL-3 | 3 mm Linear Levelers (100/bag) | \$37.00 | bg | .77 |
| PRSL-5 | 5 mm Linear Levelers (100/bag) | \$37.00 | bg | .74 |
| PRSPC | Red Protection Cup (50/bag) | \$64.75 | bg | .40 |
| PRSSV | Red Removal Cap (2/bag) | \$4.45 | bg | .05 |
| PRST-1 | 1 mm "T" Levelers (100/bag) | \$37.00 | bg | .71 |
| PRST-2 | 2 mm "T" Levelers (100/bag) | \$37.00 | bg | .78 |
| PRST-3 | 3 mm "T" Levelers (100/bag) | \$37.00 | bg | .77 |
| PRST-5 | 5 mm "T" Levelers (100/bag) | \$37.00 | bg | .77 |
| PRST | Blue Leveler Cap (50/bag) | \$64.75 | bg | 1.56 |
| PRSTT | Clear Leveler Cap (50/bag) | \$83.95 | bg | 1.03 |



The MLT System is a patented lippage tuning system for the installation of floor and wall tiles.

No. MLT-CAP Reusable Cap











| Item No. | Description | List Price | U/M | N Wt |
|----------|--|------------|-----|-------|
| MLT-CAP | Tensioning Cap (250/bx) | \$155.00 | bx | 11.08 |
| MLT-T1 | Slim Line Strap (125/bg) | \$90.00 | bg | 1.00 |
| MLT-P1 | Bottom Plate (Tile 3 - 6 mm) (250/bg) | \$47.50 | bg | .65 |
| MLT-P2 | Bottom Plate (Tile 8 - 15 mm) (250/bg) | \$47.50 | bg | .99 |
| MLT-P3 | Bottom Plate (Stone & Marble) (250/bg) | \$47.50 | bg | 1.53 |
| MLT-SLK | Slim Line Starter Kit w/Gun | \$349.95 | kt | 8 53 |



No. MLT-SLK Slim Line Starter Kit w/Gun

Bottom Plates



No. MLT-P1



No. MLT-P2




No. MLT-P3







No. MLT-GUN Tensioning Gun





No. MLT-G1 Rubber Foot



Insert for Cap



No. MLT-T2 Ready Line Strap



No. MLT-RLK Ready Line Starter Kit w/Gun

Product Highlights



No. 55-RU Red Urethane Grout Float

This grout float has a 100% pure urethane float bottom with a molded in plastic backing plate. Best for use with textured tile and stone. Has a nonslip comfort grip handle and pad measures 3-1/2" wide x 9-1/2" long x 1/2" thick.



Heavy Duty Blue Tempered Slotted Razor Blades

These 'carpet' blades are .017" thick blue tempered steel for long life. Available in dispenser packs of 100 each or 20 each. **No. 308-20** Round Corner Slotted Blades (20/pack)

No. 308-C Round Corner Slotted Blades (100/pack)



No. RS-100 RetroShelf Tile Ready Kit

RetroShelf makes it easy to install a tiled shelf in a new or existing shower in minutes. The ready-for-tile shelf allows for any tile to be installed on it prior to mounting. Tiles can be applied to RetroShelf using thin set or silicone and grooves on the shelf help to increase the tile bond. Once the shelf is tiled, mounting takes about five minutes with no tools required and no penetration of the tile or waterproof membrane. RetroShelf holds over 100 lbs., and can be placed anywhere in the shower. Made of PVC, RetroShelf is strong and waterproof. Each Kit includes a RetroShelf, mounting board with 4 each sticky pads, 2 each mounting guide rails, adhesive, (Super Glue® Future Glue for mounting guide rails to tile surface and Super Glue® Silicone for mounting shelf over the guide rails), one each alcohol cleaning wipe and installation instructions.

RetroShelf is 14%" W x 73/16" D x 1" thick and weighs 1 lb.



No. SVH-400 157" Flooring Strap Clamp w/Spacer (13' 1") No. SVH-760 300" Flooring Strap Clamp w/Spacer (25') Used for installing parquet, plank hardwood, laminate and other tongue and groove flooring. The ratchet action of the clamp pulls boards together and keeps them tight, providing up to 220 lbs. of clamping pressure. Each Clamp has 15/16" wide high strength polyester strap, spacer and galvanized or painted parts to resist rust. Clamp plate is 43/4" wide x 31/2" deep.



No. 2WB-MB 2" Cotton Web Tool Belt w/Metal Buckle
Designed for use with tool pouches, this belt has a natural
tan color and is made from cotton web material. Belt is 2-1/4"
wide and can be adjusted to fit waist sizes from 29" to 42".
(No. 700 Multi Pocket Tool Pouch not included.)



Hydrophilic Sponges

Used for grout cleanup work, these Hydrophilic Sponges are super absorbent. Sponges are rectangularly shaped with rounded corners and edges to prevent grout loss when wiping across joints. TAII sponges are supplied in individual contractor pack mesh bags of 25 each within the compressed bale.

No. GS-5-BALE Small Sponge (1,000/Bale)

No. GS-6-BALE Medium Sponge (800/Bale)

No. GS-7-BALE Large Sponge (650/Bale)

No. GS-8-BALE Extra Large Sponge (450/Bale)



No. 209-XL-C Super-Soft XL Camo Knee Pads

These desert camouflage knee pads are made from 100% washable neoprene and have a heavy duty super-soft contoured foam pad insert for greater comfort. The front of the knee pad has a polyurethane coating for increased durability and water resistance and will not mark or scratch floors. Quick and easy on/off using the single 3" wide front fastening Velcro® strap. The strap sits below the knee leaving a "clear zone" so there is no pinching or bunching. Great for wearing with shorts. Each knee pad is 7" wide x 8-1/2" long.

US Patent No. D464,177S International Patent 2001-2935



No. 3 Economy Notched Trowels

This economy trowel has a 4½" wide x 11" long tempered carbon steel blade riveted to an aluminum shank with a molded rubber cushion 'California Handle' style handle. Available in all notches (except DGR, KBC, KTA, MFT, PC and PNK). The Nos. 3ACT, 3AVF, 3DGD, 3FCA, 3FFA, 3FOW, 3RCA and 3WHA have a 7° angled leading edge.



VERSAFLOAT[™] Grout Handle and Pads

This lightweight system uses an injection molded plastic handle and rubber pads for grouting. These rubber pads fit over the bottom plate of the **No. 781-FH** Versafloat Handle. Pads stay firmly in place during use and easily peel off for cleaning or replacement. Pads measure 3%" wide x 95%" long x ½" thick. Handle and Pads are sold separately.

No. ME-3332 Mosaic Expert Trowel Gauge

The Mosaic Expert™ Professional Square Notch Trowel is ideal for laying mosaic floor or mosaic wall tile. Used to spread adhesive on the base surface before laying the mosaic, it perfectly measures the thickness of the mosaic border so when it's laid in place, it sits perfectly flush to the surrounding ceramic tiles. The notch style and measuring feature help to control depth and amount of adhesive applied. Can be used for mosaic borders ranging from 2" up to 61/4".





Tool Side

Adjust Side







- Measures and spreads adhesive before laying mosaic border
- Plastic resin composite base and adjustable 4 sided trowel (1/8" x 1/8" square notch)
- Ergonomic design provides a soft feel, reduces fatigue and offers excellent durability

No. BDT-200-1 2" x 180' Blue Painter's Tape

No. BDT-200-3 2" x 180' Blue Painter's Tape (3/pk)

Blue Painter's Tape is commonly used during installation of hard-wood flooring and the setting of tile and fixtures, natural stone and fixtures, porcelain tile, glass tile and more. The high quality crepe paper provides excellent conformability with strong holding power while the adhesive or thinset cures. For interior use only. Roll is 1.88" wide x 60 yards long.

Features and benifits:

- Multi-surface application
- Quality crepe paper
- · Solvent-free adhesive formula
- 14 day residue free removal
- Medium tack adhesive
- UV resistant







No. 150 24" Steel Tool Box

This economical all steel tool box has two side latches with a center hasp for a padlock and a smooth black powder coat finish throughout. Weighs 12 lbs.

Inside dimensions (beneath the tray) are: 24" long x 7%" wide x 55%" high.

No. PPFV Extra Heavy Duty Suction Cup

This 4½" diameter Suction Cup has an additional 3/8" wide foam ring that provides superior suction on textured tiles, holding up to 110 lbs. The 5" square molded plastic base prevents 'rocking' in use.



No. 158 24" Heavy Duty Steel Tool Box

This all steel tool box features side handles, three latches (center latch has a hasp for a padlock) and a wrinkle black powder coat finish throughout. Weighs 171/4 lbs.

Inside dimensions (beneath the tray) are: 24" long x 97%" wide x 6" high.



No. WSG-7 41/2" Compact Angle Grinder

This powerful Grinder boasts a 760 Watt motor for maximum speed and torque under load. The smaller grip size and light weight allows for minimal fatigue even after prolonged use. The gear head is solid metal and can rotate every 90° for optimal working position. Grinder has long lasting brushes and electronics dust protection to ensure a long working life. The handle can be mounted on the left or right side and is angled slightly forward for improved control and comfort. Has a 'lock on' power switch and is covered with a standard 1 year warranty and an additional 2 years with product registration.





Beno J. Gundlach Company



product release

NPR-1

from

GUNDLACH

No. 55-RU Red Urethane Grout Float

This grout float has a 100% pure urethane float bottom with a molded in plastic backing plate. Best for use with textured tile and stone. Can be used with sanded and unsanded grout and will not mar or scratch tile. Has a nonslip comfort grip handle and pad measures 3½" wide x 9½" long x ½" thick.



No. ESS-224 24" Edge Strip Sticks

Edge Strip Sticks provide a barrier to contain liquid self-leveling underlayment from escaping into adjacent areas, doorways, heat registers and under drywall. Edge Strip Sticks have a pressure sensitive adhesive applied for fast installation, and cut easily with a utility knife. They provide a 5%6" thick soft joint perimeter for tile and stone installations. Made from synthetic cork, they will not rot or support the growth of mold. Each stick measures %6" thick x 24" long x 2" high. Sticks are sold 12 per package.







Creates a perimeter border to contain liquid self-leveling underlayment as shown above.

No. 575 Multi-Undercut Saw Kit

Light duty saw fully undercuts inside corners

This saw undercuts walls, door jambs, toe spaces and will also fully undercut inside corners up to $\frac{1}{4}$ " deep. The height of cut is easily adjustable from flush to 1" above the floor in $\frac{3}{2}$ " increments. The large flat base helps prevent tipping and assures accurate, level cutting. Has a dual angle depth gauge which allows undercutting at a 'straight on' or 45° angle. An adjustment scale provides precision depth control in $\frac{1}{4}$ " increments. Maximum depth of cut is $\frac{1}{4}$ ". Saw has a 7' $\frac{18}{2}$ cord and is double insulated for safety. Each Saw Kit includes a No. 556 Carbide Tipped Steel Blade, saw, plastic carrying case, hex wrench for blade removal and instructions. Guaranteed for six months, not including the motor or motor brushes.

Caution: Depth of undercut should not exceed wallboard thickness (generally ½") to avoid structural weakening caused by cutting nails, wall studs or sill plates, and to avoid blade damage by hitting nails



| Specifications | | | | |
|-----------------------|---------------|--|--|--|
| Motor | 120v 8a 60 Hz | | | |
| Blade Shaft RPM | 10,000 RPM | | | |
| Weight (with No. 556) | 6¾ lbs. | | | |

Note: The No. 575 Multi-Undercut Saw Kit replaces the No. 545 Multi-Undercut Saw Kit shown on Page 13 in Catalog 128.



Undercut — Inside Corner




Undercut — Toe Space



Beno J. Gundlach Company

No. 3 Series Notched Trowels

This trowel has a 4½" wide x 11" long tempered carbon steel blade with a molded rubber cushion 'California Handle' style handle. Available in the notches shown below.

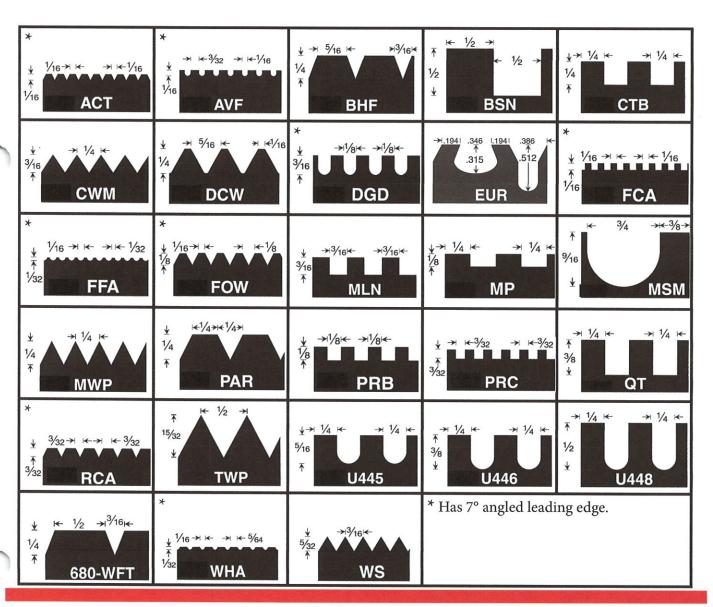

Product Highlight

No. 209-XL-C Super-Soft XL Camo Knee Pads



These camouflage knee pads are made from 100% washable neoprene and have a heavy duty super-soft contoured foam pad insert for greater comfort. The front of the knee pad has a polyurethane coating for increased durability and water resistance and will not mark or scratch floors. Quick and easy on/off using the single 3" wide front fastening Velcro® strap. The strap sits below the knee leaving a clear zone so there is no pinching or bunching. Great for wearing with shorts. Each knee pad is 7" wide x 81/2" long.

The other Knee Pads in the "Super-Soft" family of knee pads —



No. 209



No. 209-XL



No. 209-XL-L



Beno J. Gundlach Company 211 North 21st Street • P.O. Box 544 Belleville, IL 62222 • U.S.A. TEL: 618 233-1781 • FAX: 618 233-3636 www.benojgundlachco.com