

janser

FITTING

Welcome to the new edition Janser Basics Catalogue

Janser U.K. is pleased to present our new 'Janser Basics' product catalogue, a supplement to our full catalogue.

The concept of this brochure is to present a range of popular core products from our main catalogue in a clear, attractive manner. The range illustrated provides all the key products for the preparation and installation of most flooring materials.

To order from this catalogue simply quote the order number in the orange code boxes next to the product...

Should you require our full catalogue or further information please contact our helpline on.



© Copyright:- The copyright of this catalogue is owned by Janser UK Ltd. and may not be reproduced in any way or form without the express permission Janser U.K. Ltd.

Trade Marks:- 'Janser', 'Dolphin', the symbol of the leaping dolphin above waves, 'maestri by Janser' are registered trade marks of Janser and may not be reproduced or used in any form without the written permission of this company.

Products:- Janser U.K. Ltd. reserve the right to change the specification of any product contained in this catalogue without notice. All descriptions of products are for guidance only.

CONTENTS

VINYL GROOVING & CUTTING

1-25

- Columbus Vacuums Strippers
- Scrapers Claws Grind Stones Aeration Rollers
- Trowels Protimeter Moisture Indicators

BLADES. KNIVES & CUTTERS

26-33

- · Green box Titan Stanley Knives
- Cutters
 Shears
 Gripper Shears
 Metal Shears
- Cookie Cutters
 Syringes
 Repair Tools

VINYL GROOVING & CUTTING

34-47

- Auto-Groovers
 Hand Groovers
- Leister
 Welding
 Hand Rollers
 Hot-Jet Nozzles
- Spatulas Mozart Trimming Tools Cold Weld
- Scribers
 Dividers

RULES & ROLLERS

48-49

- Roll-up Rulers Door Rulers
- Invisiseamer T-Rule Hand-Rollers Lino Rollers
- Wall Rollers
 Tile Cutters

FLOOR TILE CUTTERS

50-51

• Tile Cutters • LVT Cutters

CARPET FITTING

52-64

- Tapes Disto Kickers
- Chalk Line & Chalk Stair Tools Hammers Drive Bars
- Kneepads Irons Heat Tape Seam Rollers
- Glu-Guns Staplers Spotnailers Compressors

WOOD & LAMINATE FLOORING

65-72

- · Door Trimmers · Jamb Saws
- Hand Saws Templates Sharpeners Fein Multimaster
- Spacers Shunters Tapping Blocks Wax Kits
- Laminate Guillotines Portanailers Sanding Abrasives

MISCELLANEOUS PRODUCTS

73-83

- Tapes Rollers & Frames Skeleton
- Nails Drill Bits Gimps Tap-its Rawl Plugs
- Spray Adhesive
 Handling & Lifting
 Work Clothing
- Tool Boxes Packaging Whipping & Cutting

COLUMBUS single-disc buffing & levelling machine

Mod.135 SH

TECHNICAL SPECIFICATIONS

Power supply 230V or 110V 1200 Watt (1.5HP) Motor power Ø375mm (14 1/4") Working width Speed 42kg (93lbs) Weight

Mod. 135 SH

240V 120V 112 455 000

112 455 600



This machine will mill, grind and sand your floor surface whilst creating a minimum of dust - thus helping to maintain a healthier working environment, All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

On parquet floors the Columbus is ideal for sanding immediately before and between sealing and varnishing coats. It can then be used for surface cleaning, polishing and the applying of sealing wax.



MIHITIME

Multi Vac III Dust Extraction Ring

Multi-Vac III can remain fixed to machine after installation.



Pot Brush Disc

For removing the metallic layer that builds up between anhydrite and magnesite screed materials. Also for the removal of residual foam backing, plaster splatter, residual paint coatings, adhered underlay, etc.

For grinding screed, hard plaster, asphalt and concrete. Good grinding

Ø375mm (14 ¾") Pot Brush 112 322 000

Replacement pot - 1 piece 112 321 003



Universal Plate

For accepting sandpaper discs, sanding gauze discs and abrasive pads. For model 135/145/155



Removes unevenness, soft spots, coatings and residual filling plaster. Ø375mm (14 ¾") Stone Disc

112 346 000

Replacement stone - 1 piece

112 346 001

112 334 000

Universal Plate with Distance Ring

For accepting sandpaper discs, sanding gauze discs and abrasive pads. For model 135/145/155



Diamond Disc with 5 Segments

Conical Stone Disc - 16 Grit

rate due to high area edge width of hollow conical stones.

With especially designed high quality diamond grinding segments to increase the capacity and efficiency of your Columbus Machine in terms of subfloor preparation.

Grinding of screed, removing sinter surfaces (anhydrite), adhesive residue, levelling compounds, thin coatings and painted surfaces.



Spare segment - 1 Piece

112 381 050



112 334 100

Grinding Plate - Grit 20

With 6 rectangular grinding stones, replaceable

75 x 90mm (3 x 3 ½") For grinding of plaster and levelling compound, removal of residual paint and gypsum, smoothing of slight unevenness. For model 145/155



Grinding Plate

Spare Stone 161 515 003

Steel Brush

Wire length 45mm (1 ¾")
For removal of foam backing, adhered residual underlay and carpet backing for industrial floor cleaning.
For model 145/155



112 319 000

Grinding Plate Rubber

Thick rubber based plate for carrying sandpaper, gauzes etc.



Rubber Plate 112 306 000

DIMMABRUSH

Fit most levelling machines

Sanding Plate S 16



Grinding Plate K 6

For residual adhesive/surface finishes.

Ø 400mm disc, with 25 grit inserts
Grinding Plate 112 388 000

Spare inserts, 25 grit (6 pieces)

Spare inserts 112 388 025

with 16 diamond wings.

For removing and levelling of spackling compound and screed.

Ø 400 (15¾") Grit 25

Sanding Plate 112 389 000

Spare diamond inserts 16pcs. Grit 25.

Spare inserts 112 389 025



CLEANING MAINTENANCE PADS

25mm thick. Ø410mm

Pad BLACK

For fixing grinding gauze and cleaning old wax etc. and ceramics

783 000 360



For removing stubborn dirt/stains from resilient flooring

Brown 783 000 370



For cleaning most surfaces.

783 000 380



For cleaning and polishing (medium) & wet cleaning of tiles.

Green 783 000 350

Pad RED

For cleaning and general maintenance.

Red 783 000 390



For polishing and oiling - high gloss.

White **783 000 400**

GRINDING GAUZES

Ø 410 (16 $\frac{1}{8}$) for model 135 / 145 / 155

40	
Grit 60	783 000 045
Grit 80	783 000 047
Grit 100	783 000 050
Grit 120	783 000 055
Grit 150	783 000 057
Grit 180	783 000 060
Grit 220	783 000 062
Grit 320	783 000 064



SANDING MATS

Gr. 40 coarse - for sanding wood

Gr. 80 medium - for "between treatment" sanding
Gr. 280 fine - for cutting sealing floor surfaces

For Models 135 / 145 / 155

Grit 40 783 000 140 783 000 180 783 000 280 783 000 280



SPECIAL MAT (not illustrated)

For parquet intermediate sanding and for removing wax residue and oil.

783 000 022

16"

SANDING MACHINES & ACCESSORIES

Sandpaper, Double-sided

Disc Ø = 375mm

For Columbus Machines

Double-sided diameter of the boring is 40mm

Grit 12	Coarse	112 309 000
Grit 16	Coarse	112 311 000
Grit 24	Coarse	112 312 000
Grit 30	Medium	112 313 000
Grit 40	Medium	112 314 000
Grit 60	Medium	112 315 000
Grit 80	Fine	112 316 000
Grit 100	Fine	112 317 000
Grit 120	Fine	112 318 000

Disc Ø = 400mm

For Non Columbus Machines

Grit 16	Coarse	112511000
Grit 24	Coarse	112 512 000
Grit 30	Medium	112 513 000
Grit 40	Medium	112 514 000
Grit 60	Medium	112 515 000
Grit 80	Fine	112 516 000
Grit 100	Fine	112 517 000
Grit 120	Fine	112 518 000
	Grit 24 Grit 30 Grit 40 Grit 60 Grit 80 Grit 100	Grit 24 Coarse Grit 30 Medium Grit 40 Medium Grit 60 Medium Grit 80 Fine Grit 100 Fine

Disc Ø = 430mm

: 430mm 17"

For Non Columbus Machines

Grit 16	Coarse	112 611 000
Grit 24	Coarse	112 612 000
Grit 30	Medium	112 613 000
Grit 40	Medium	112 614 000
Grit 60	Medium	112 615 000
Grit 80	Fine	112 616 000
Grit 100	Fine	112 617 000
Grit 120	Fine	112 618 000

ABRASIVE DISCS (Double-sided)

A thin steel disc with randomly scattered red hardmetal fragments welded to the surface. For roughing the surface of anhydrite and screed. Also suitable for levelling off surfaces.

15"

DiscØ = 375mm

For Columbus Machines

Grit 14	Coarse	112 308 000
Grit 24	Medium	112 308 024
Grit 36	Fine	112 308 036

Disc Ø = 400mm 16"

For Non Columbus Machines


Grit 14	Coarse	112 520 000
Grit 24	Medium	112 520 024
Grit 36	Fine	112 520 036

Disc Ø = 430mm 17"

For Non Columbus Machines

Grit 14	Coarse	112 815 000
Grit 36	Fine	112 815 036

METAL FRAGMENTS

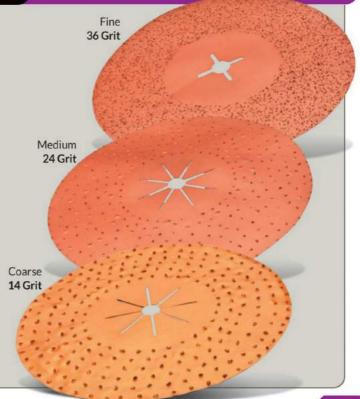

DUST EXTRACTION

COLUMBUS - 3 PLATE STARTER KIT

TECHNICAL SPECIFICATIONS

230V or 110V Power supply 1200 Watt (1.5HP) Motor power Working width Ø375mm (14 ¾") Speed 140rpm Weight 42kg (93lbs)

Start-up Kit comprising:

- · Columbus machine
- Grinding plate
- 1 x Universal plate
- 1 x Abrasive plate

The 3-gear planetary transmission is designed to cope with the toughest tasks.



Mod. 135 SH - 1200W

240V Columbus Kit 120V Columbus Kit

112 455 900

112 455 800

Completely eliminates all unwanted material adhered to your subfloor!

This machine will mill, grind and sand your floor surface while creating a minimum of dust - thus helping to maintain a healthier working environment.

The robust design and construction of the Columbus ensures long life and good reliability.

By raising and lowering of the lever, the machine glides across the surface in semicircles. All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

With a wide range of working plate options to suit all types of floor surfaces, the machine is unsurpassed in saving you time and effort. Working plates, discs and brushes can be changed in seconds

All Columbus-Models are delivered without grinding plate and without dust extractor.



COLUMBUS and JANVAC 1600 H KIT

This machine will mill, grind and sand your floor surface while creating a minimum of dust, helping to maintain a healthier working environment.

The strong design and well-built construction of the Columbus ensures long machine life and good reliability.

By raising and lowering the lever, the machine glides across the surface in semicircles. All types of plaster, screed, asphalt and adhesive along with small surface irregularities can be removed from the subfloor with ease.

The wide range of sanding plates make the Columbus suitable for all types of floor surfaces. The machine isunsurpassed in saving time and effort, with sanding plates, discs and brushes changeable in seconds.

The 3-gear planetary transmission is designed to cope with the toughest tasks.

Included with Model 135

Work in a nearly dust-free environment with the MULTI-VAC dust extractionring and JANVAC 1600 dust extractor.



Manney Ma

Pictured is the Columbus with MULT-VAC I dust extraction ring and JANVAC 1600-H dust extractor.

With the Dust Extraction System MULTI-VAC in combination with a strong vacuum cleaner like the JANVAC, grinding or sanding can be done in a nearly dust-free environment.

H is the highest category for dust removal.

240V KIT	112 456 000
120V KIT	112 456 900

DUST EXTRACTION

JANVAC 1600-H

Power Dust Extractor

Improved version of our successful model JANVAC 1600-H

Dust extractors are well suited for extracting sanding dust, cleaning building sites and vacuuming tools such as grinding machines and hand grinders. Advantages of all JANVAC models:

- self-cleaning Teflon-coated tube filter
- main filter BIA Dust category M
- micro filter BIA Dust category H14
- · continuous high suction
- · filter cleans itself during operation
- low noise level
- additional socket for machines with tracking and automatic power on
- · trolley frame with large wheels

IMPROVED features

- new 5 m elastic hose
- new 1450W motor with improved vacuum (3100 mm H 2 O)
- · Purging ring and adapter ring modified for better airflow
- · reinforced HEPA filter attachment
- · new bayonet coupling
- · practical bag holder
- · new synthetic collection bag
- · Plug for boiler sealing

TECHNICAL SPECIFICATIONS

120V or 240V Power Supply: Motor Power 1100Watt (1.5HP) Working width: 425mm (1 1/2") Weight:

115 095 260 15kg (33lbs) ianser

STANDARD ACCESSORIES:

120V

240V

5 m grey suction hose Ø 38 mm (1 3/8") rolling floor nozzle 45 cm (1 %") suction pipe, suction nozzle for joints

JANVAC 1600-H

Dust Collection Bag, synthetic

115 095 500

115 095 000

ACCESSORIES: there are a large range of accessories available, please see page 34 of our main catalogue.

JANVAC Separator

The new JANVAC Separator can be used in all environments where vacuum cleaners are at home.

Connected to a sanding machine, saw, portable machine or simply to the suction tube with floor suction nozzle, the JANVAC Separator increases the suction volume significantly.

High separation efficiency only allows the finest dust particles to be picked up by the dust extractor. You save time and protect the filters!

SPECIAL features

- tried and tested JANVAC quality
- · can be used with or without dust bag
- · standard connectors for JANVAC dust extractors
- · cyclone separator integrated in machine
- · your suction volume is significantly increased for longer service life of the dust extraction filters
- · connects to all usual dust extractor models
- simple operation

TECHNICAL SPECIFICATIONS

Dimensions: 79 x 43x 43cm (31 % x 16 % x 16 %")

Weight: only 9kg (20lbs) Inlet: Ø 50mm (2") Volume 501

Hose lenght: 3.5m (10') (including hose couplings)

INCLUDED IN DELIVERY:

1x hose 3.5 m (10') with hose couplings 1x dust bag 50 L incl. cable ties 1x cardboard tube

1x 90° connection adaptor Earthing feature as standard

JANVAC Separator

115 101 000

Dust Bags (x10)

Plastic 50L incl. fastener 115 101 010



Separator showing use with JANVAC





Separator showing use with COLUMBUS and JANVAC

DUST EXTRACTION

JANVAC LP - Series

Single-phase industrial vacuum cleaners, suitable for safe operation in any environment or application where large quantities of dust to be vacuumed. H class filters in series and a fully automatic filter cleaning system, are key arguments.

The disposal of the vacuumed material is facilitated by the use of collection bags that, once sealed, prevent contamination of the work environment during disposal and provide additional safety for the health of the operator.

AUTOMATIC CLEANING OF FILTERS

The cleaning system guarantee constant suction, ensuring the cleanliness of the filters without any intervention from the operator and without interrupting operation as the filters are periodically cleaned by the vibrating action. These models have been designed to meet the requirements of continuous and extended vacuum cleaning, being particularly suitable when they are coupled with machines in operation.

The cleaning system allows an automatic filter cleaning without ever interrupting the vacuum cleaning process ensuring a constant and efficient suction power. Each of the fitted filters is periodically cleaned by the vibrating action,

Unique (22m) continuous bag system. Simply cut and seal - the next section is ready for use. No delay or mess!

FILTERING SYSTEM

The external part of the filter is made using conductive material, a property that allows discharge of the electrostatic current generated during vacuum cleaning. The internal part, thanks to the use of the HEPA filter, is able to filter 99.995% of dust with 0.3 u particles, making the work environment safer and free

The filters are contained in stainless steel cylinders that serve as protection against sucked materials that might be corrosive or abrasive.

- suction hose Ø 38 mm 5 m (13/8" 16' 5") complete with connectors
- rolling floor nozzle 45 cm (1' 5 %"),
- handpipe Ø 38 mm (1 3/8"),

STANDARD ACCESSORIES:

- suction nozzle for joints,
- 1 x longopack 22 m (72')

JANVAC 340 LP

240V 115 021 000 120V 115 021 500

Longopac Spare bags

4 x 22m (24vd)

115 097 720

SPECIAL features

- · HEPA filter with PTFE membrane
- · Patented filter cleaning system
- · Filter Cleaning during operation
- · Robust metal frame with large wheels for easy transportation and best job site management
- Anti-static discharge set up

FLEX HF 150P Contract Grinder

For accessing areas which are difficult to reach such as doorways and perimeters.

Suitable for removing:

- · irregularities complete with dust extraction
- · residual adhesive housing with diamond studded disc
- · markings, especially epoxy with or without guartz content
- · Laitance from anhydrite screed

Cover can be removed to ensure easy access to edges.

With suction port for dust extractors.



240V KIT

114 106 000

Complete with case and dust extraction cover (extraction hose and sanding disc not included)

TECHNICAL SPECIFICATIONS

Power supply 240V 2000 Watt (2.5HP) Motor power Ø125mm (4 %") Grinding plate

Speed 6500rpm Weight without case 8kg (17.6lbs) Weight with case 14kg (30.9lbs)

SPARE / OPTIONAL ACCESSORIES

Diamond Grinding Plate Raptor Ø 125mm (5")

Effective grinding with angled and self sharpening diamond segments. Removes tough coatings on concrete (acrylic resin paint, latex, epoxy resin, epoxy with sand, bitumen).



PCD Grinding Disc Randfix

This very aggressive PCD grinding disc with slightly protruding PCD inserts reaches right up to stop profiles. threshold profiles or walls.

Highly suited for coatings, bitume residues, spackling compounds and all other edge milling tasks.

114 101 300

PCD Head Disc

This new PCD head disc can be used with the HF-150 P (with clear plastic dust-cowl) as well as the HF-150 (with metal dust-cowl)

The height of both dust-cowls can be adjusted for best possible dust collection.

114 101 200

Diamond Grinding Plate



Diamond Grinding Plate



114 103 000

SITE DEMO AVAILABLE

COLIBRI Grinding Machine



TECHNICAL SPECIFICATIONS

Mains Supply: 240v 2200 watt Motor: Working Width: 300mm Speed: 2600rpm 35kg Weight: Extractor Connection: 50/76 mm

Colibri Grinding Machine

112 979 000

SPECIAL features

- · light machine, only 35kg
- · high performance of 2600 rpm

janser

- high torque of 43 Nm
- easy tool change
- high surface performance
- foldable
- competitively priced





free operation



Water level for setting



Accessories for Colibri

Additional weight 10kg

For increased pressure and additional grinding performance

10kg weight

112 979 900

Universal disc - Green

With very high and even grinding performance for cement underflooring and anhydrite floors

Green disc



112 979 620

PCD disc Piranha - Pink

with strong grinding performance for tough adhesives, coatings or carpet residues

Pink disc



112 979 610

SITE DEMO AVAILABLE

GRINDING MACHINE - BS-330

1 machine - 2 applications as surface and edge grinding machine

The BS-330 is a robust grinding machine, which finds its application in both, surface and edge treatment.

The powerful motor generates enormous grinding performance on small and medium surfaces.

In addition, the machine can be converted without tools and in seconds to a perfectly matched edging machine.

The grinding head can be adjusted with a clever locking system in both directions. Thus, both the right and the left side of the machine, can be used for edge treatment, simplyfying grinding work in the edge region enormously.

Our proven, high-quality diamond grinding tools can be used with this machine.

Machine supplied with Quick Change Base Plate - no grinding segments included - please see below segment options



TECHNICAL SPECIFICATIONS

110V/230 V Power supply 1500 W (1,6 hp) Motor power Working width 330 mm (13") 600 rpm Speed Weight 65 kg (143 lbs)



BS-330 230V

112 986 000

BS-330 110V

112 986 200

Quick Change Base Plate

can be used with 3 or 6 OUICK CHANGE Segments

10kg weight



112 986 815

PCD 4-trapezoid



DUO 2x PCD, 2x bar

112 380 060

QUICK - CHANGE segments PCD



112 380 020

Trapezoid Grit 14/18





For segment application recommendation please see MAIN Catalogue page 30

STRIPPERS

SITE DEMO

AVAILABLE

MASTER MOBIL HYDRAULIC II

MASTER MOBIL II - 230V

MASTER MOBIL II - 110V

The powerful motor combined with the revised HYDRAULIC-DIRECT-DRIVE system ensures high output with an extremely low

noise level.

The MASTER-MOBILII is self-propelled (forward and reverse) with unparalleled perfomance due to it's high torque German designed electric motor.

Adjustable guide handle in six positions allows ergonomic operation depending on body size or preferred working position.

Weights can be easily removed for transportation, reducing the netweight of the machine.

TECHNICAL SPECIFICATIONS

Power supply 230V or 120V

Motor power 0.75 kW (1 HP)

Weight 75kg (174lbs)

Weight incl. front weight 105kg (205lbs)

Additional Weight

Fast and easy mounting 27kg (59.5lbs)



Weight for MASTER MOBILE

Blade #104

Especially for linoleum.



152 x 102 x 1.6mm (6 x 4 x 0.062") 111 800 104

Impact Design - Lightweight - Great Manoeuvrability



111 801 420

Blade #103

Ultra high quality spring steel for long blade life between sharpening. Works for all glued down floors.



254 x 76 x 1.6mm (10 x 3 x 0.062") 111 800 103

Blade #101

Self-scoring blade for vinyl, carpet, linoleum, cork and other floors.



152 x 102 x 1.6mm (6 x 4 x 0.062")

111 800 101

Blade #102

Transport positions

111 801 000

111 801 500

Adjustable working positions

Small for hard to remove surfaces eg. epoxy, parquet, tough coatings.



152 x 127 x 1.6mm (6 x 5 x 0.062")

111 700 102

STRATO-MOBIL III

Angle of the handle is adjustable to six different positions in order to match the individual height of the operator or preferred working position.

Hyraulic driven turning handle control with adjustable comfort grips for easier operation. Increased power through modified hydraulic technology.

Adjustable blade holder which allows to adjust the angle of the blade according to the removal conditions in order to ensure best possible removal rates.

Proven benefits:

- · Extremely quiet operation.
- Easy release side weights on the side of the machine to allow a perfect weight balance according to the job condition.
- · Rounded front weight which ensures the removed materials slide away smoothly without impeding the machine's forward movement.



POWER STRIPPER

Note: Power Stripper comes complete with 2 blades and without carrying case.

The Power-Stripper was developed for continuous use with the following features:

- Heavy duty 3 HP original Flex motor 2000 watt
- Lightweight and compact for removal of all types of floor covering from concrete or wood floors.
- Adjustable handle length for maximum user comfort.
- Padded shoulder support to give more push.
- · Metal carrying case optional extra.
- · Wheels optional extra.
- All spares stocked in the U.K. = a fast turnaround in-house service/repair facility.

TECHNICAL SPECIFICATIONS

 Power Supply:
 120V or 240V

 Motor Power:
 2000Watt (3HP)

 Working width:
 210mm (8 ¾²)

 Weight:
 14.4kg (31.8lbs)

Optional Extras



Carrying Case



Transport Wheels



111 095 000

Power Stripper

240V

POWER STRIPPER BLADES (also suitable for DURO-Stripper)

Power Stripper

120V

111 093 000





210 x 60 x 1mm (8 ½ x 2 ½ x 1 ½") 111 080 001

130mm Blade



210 x 130 x 1mm (8 ¼ x 5 ½ x 1 ½")

Serrated Blade HD

- Removes floor coverings with felt/fleece backing
- · Serrated edge cuts off fibres
- Teflon coating keeps adhesive away from blade



210 x 60 x 1mm (8 ½ x 2 ½ x 1 ½") 111 095 400

COSMO IV Stripper

Cosmo - a powerful floor stripper for small and medium sized areas.

- · quiet in operation
- adjustable handle
- guide handle can be folded for compact transport
- 750 watt motor, 45kg weight



350 x 120 x 1 0mm 350 x 120 x 1 5m

350 x 120 x 1.0mm 111 600 003 350 x 120 x 1.5mm 111 600 001

SCRAPERS



SCRAPERS



Sanding block only

161 519 000

Grit 24

Grit 36

161 529 000

161 529 020

161 529 030

161 519 030

COLLOMIX - Hand Held Mixers



Collomix Xo-Series

The Xo machines are attractive to look at due to their revolutionary design. High quality components and materials ensure long-term safe use.

Hand Mixer - Xo1 HF

Compact 1-speed machine for a wide range of mixing jobs with a capacity of up to 40 litres.

Very easy to use, featuring the very latest ergonomic design. Excellent gearbox ratio and electronic speed control.

TECHNICAL SPECIFICATIONS

230V Power Supply 1010W Motor Power Gears Speed 680rpm 40 litres Mixing volume Weight 5.3kg

Xo1 - 230V

111 237 000

Xo1 - 120V

111 237 500

Particular advantages over previous models:

- improved ergonomic handles
- very stable and robust handle construction
- very long life carbon brushes
- significant noise reduction

All Xo-mixers are equipped with the HEXAFIX clutch.

Hand Mixer - Xo4 HF

Very powerful, 2-speed mixer for universal mixing jobs with excellent ergonomics.

High torques provide sufficient power and speed even for high viscosity material; ideal quantity per mix - 65 litres.

TECHNICAL SPECIFICATIONS

230V Power Supply Motor Power 1300W Gears Speed 1. Gear 450rpm 2. Gear 620rpm Mixing volume 65 litres

Weight 6.3kg Xo4 - 230V

> Xo4 - 120V 111 238 500

> > Cordless Xo10

111 238 000



Hand Mixer Xo55 DUO Easy operation and less effort through

Including

mixing tool

WK 120 HF

counter-rotating mixing tools

Forced-action mixing effect.

For mixing all types of materials, including viscous and heavy materials, quickly and thoroughly.

Electronic speed control. Variable speed for smooth power transmission

TECHNICAL SPECIFICATIONS

Power Supply 230V or 110V Motor 1450w No. of gears Speed (no load) 0-470rpm Mixing Volume 90 litres Weight 9.1kg

Xo55 DUO options

230V Xo55 DUO 111 239 000 120V Xo55 DUO 111 239 500

 Powerful 18v - 5.2Ah battery · Ideal working height Reliable precision gearbox Safety swith with acceleration function Powerful drive motor · Hexafix, quick change coupling 40 litre mixing capacity **BATTERY INCLUDED TECHNICAL SPECIFICATIONS** 18 V, 5.2 Ah Li-ion Power Supply Load speed -640rnm Mixing Paddle Ø120mm Max. mix quantity 40L Approx. 100min Charging time Xo10 Cordless 111 201 500 Spare Battery 111 201 510

STIRRING

SMART - STIRRING STATION

Uniquely adjustable and apply up to 100kg of screed in one operation!

Weight - 18.5kg

- Suitable for most stirring machines
- The solid front wheels in combination with the castor wheel allows ideal handling
- Unique 100L mixing capacity option
- Easily moved on site
- Robust construction for long life
- Manufactured to exacting standards by Janser
- Delivered complete with 50L mixing bucket!

SMART Stirring station

111 215 000

Quick screw for fixing the stirrer.

> New! Reinforced lateral holder

Adjustable in height for optimising fixation of the bucket and depth adjustment of the stirrer.

Adjustable to hold 50 or 100 Litre bucket.

PROFESSIONAL STIRRING STATION Mix and apply up to 75kg of screed in one operation!



The solid construction of the trolley base guarantees a stable and secure stirring. The handle is easily adjusted in height giving you the best possible working position. It can effortlessly be turned or even removed completely when you need to put a stirring station back in your car. The tripod is quickly and without difficulty attached to the edge of the barrel. Its robust construction makes it keep even the most powerful stirring machines steady.

Trolley Base Turbo Stirrer 111 214 200

Mixing Barrel - 75L

Hose Holder

Drill Support

111 214 100



Kit Complete 111 214 000

Trolley base, Tripod Stirrer, 75L Barrel, Hose Holder (stirring machine not included)

Trolley (Tiltable)



Simplifies application of adhesive and levelling compounds.

for 30L bucket (without bucket)

111 214 500



110V FloorMix

111 251 500

Special mixing paddle

111 251 200

Mixing bucket 110L

111 251 100

FloorMix 2300

The mobile mixer for effective working due to short mixing times and high output.

TECHNICAL SPECIFICATIONS

110V or 230V Power Motor Power 2300W Speed 70/130/160/280rpm

M16 Tool holder Weight 48kg Container size 110L

Homogenous and lump free mixing of float screed, levelling fillers, fibre-reinforced fillers, coloured coatings, liquid plastics

- Large mixing volume up to 150kg for large area capacity
- Robust, powerful 2300W motor very high torque
- Four speed settings by 2-speed gearbox and two electronic speed levels - optimal mixing results



SUBFLOOR PREPARATION

ECONOMY POWER MIXERS

- · Lightweight for comfortable handling and carrying
- Adjustable speed control
- · Lockable speed control for continuous operation
- Metal handle acts as a rest when placing down protecting the mixer head
- Easy change brushes for increased motor life and easier servicing (available separately)

TECHNICAL SPECIFICATIONS

Power Supply Motor No. of gears Speed (no load) Mixing Paddle

MIX850 230V / 50Hz 850w 0-550rpm Ø120mm



850W Power Mixer

Economy Power Mixer 230V **Economy Power Mixer 110V**

MIX 850 MIX 850 110

- Specially designed powerful motors
- · 2 Gears for high performance
- · Electronically controlled variable speed
- · Lockable speed control for continuous operation
- Supplied in storage case



TECHNICAL SPECIFICATIONS

MIX1400 Power Supply 230V / 50Hz Motor 1400w No. of gears Speed (no load) 300-700rpm Mixing Paddle Ø140mm

MIX1400IND 110V / 50Hz 1400w 300-700rpm Ø140mm



1400W Power Mixer - Twin Gear

1400W Mixer - 230V 1400W Mixer -110V

MIX 1400 MIX 1400 110

LEVELLING PINS

Save time and costs when levelling floors



and attach to floor



- NO MORE GUESSING!
 - Now you can level with precision, achieve better results and use less material.
- Thanks to the integrated millimetre scale, the poles can be cut to the desired height.
- The strong adhesive tape ensures they can be fixed to all surfaces
- The yellow pins are easily identifiable.

100 pieces 161 855 500

Heavy Duty Mixing Tubs



Mix 2 bags of screed



Mix 3 bags of screed

111 208 915



Mix 4 bags of screed

100L 111 208 920 Heavy Gauge Plastic for rigidity. Suitable for most compounds such as mortar, epoxy etc.

- Use with most mixing stations.
- Side Handles for ease of use.

Calibrated Mixing Bucket 30L

111 208 905

Black, polyethylene with metal handle, high-strength material, ideal for spackling compound etc

111 285 000



Black, high-strength material, non-tearable handles.

111 260 000

Special Mortar Bucket 65L Collomix

Mixing Bucket HD



Spiked Soles



Complete with fixing straps. Solvent resistant threaded steel spikes for walking on fresh screed and adhesives. Prevents disturbance to laid surface.

Long spikes 2" 171 805 000 171 805 100 Short spikes 1"

"Shoe-In" Slip On Shoes



Shoes are made from high quality, long lasting Elastomer.

Height of nails: 21mm - delivered as a pair

(e.g. for damp proof membrane)

42 (8) and smalle

42 (8) - 44 (10)

XL for shoe size 44 (10) - 48 (15)

STIRRING

Adapters for mixing tools

Paddle connecting types

HEXAFIX® for changing tools - fast, no additional tools needed.

Adapter for upgrading hand held stirring tools with M14 thread to HEXAFIX®

For an upgrade you simply need to screw the adapter onto the M14 thread of your machine.

Retrofit Adapter 111 233 100

Combi-adapter for upgrading hand held stirring machines with HEXAFIX® to M14 thread.

Screw the combi-adapter onto the 5/8 thread of the hand held stirring machine instead of the HEXAFIX® coupling.

Combi Adapter 111 233 200



HEXAFIX®

M14 Screw-in Threaded Metric

S - Standard

Overview of mixing

MK

WK

MM

KR

Paddles by Collomix - for the perfect mix



Rugged professional mixing tool with three mixing blades, clockwise rotating, for heavy viscous materials such as concrete, mortar, plaster, epoxy mortar, etc.

ines.	load	- 5	as ingani	chuck	type	in watts	
MK 120 HF	15-25kg	120mm	590mm	16mm	HEXAFIX®	900	161 605 900
MK 140 HF	25-40kg	135mm	590mm	16mm	HEXAFIX*	1000	161 616 900
MK 120	15-25kg	120mm	590mm		M14	900	161 604 000
MK 140	25-40kg	135mm	590mm		M14	1000	161 616 000

Versatile mixing tool with good material guidance, clockwise rotating, with two mixing blades for lower loading of the drive, for sticky and plastic materials such as tile cement, ready-mixed mortar, ready-mixed plaster, screed filler

WK 90 S	7-10kg	90mm	400mm	10mm	Push-in	500	161 606 000
WK 120 S	10-15kg	120mm	590mm	13mm	Push-in	700	161 607 000
WK 120 HF	10-15kg	120mm	590mm	16mm	HEXAFIX®	900	161 608 900
WK 140 HF	15-30kg	135mm	590mm	16mm	HEXAFIX®	1000	161 615 900
WK120	10-15kg	120mm	590mm	16mm	M14	900	161 608 000
WK 140	15-30kg	135mm	590mm	16mm	M14	1000	161 615 000

Mixing tool for small volumes of tile cement, ready-mixed mortar and pointing mortar: ideal for power drill, clockwise rotating.

MM85 S	7-10kg	85mm	400mm	10mm	Push-in	500	161 611 000
MM 115 S	10-15kg	105mm	590mm	13mm	Push-in	700	161 612 000
MM 115	10-15kg	105mm	590mm		M14	750	161 613 000



Mixing tool with high shear forces, prevents the formation of lumps, ideal for self-levelling materials, adhesives and sealants, bitumen coverings, fillers and epoxy mixes; easy to clean.

KR 90 S	5-15kg	90mm	590mm	13mm	Push-in	750	161 620 000
KR 120 S	15-25kg	120mm	590mm	13mm	Push-in	900	161 621 000
KR 120 HF	15-25kg	120mm	590mm	16mm	HEXAFIX [®]	900	161 623 900
KR 120	15-25kg	120mm	590mm	16mm	M14	900	161 623 000



DLX Levelling screeds, slurry paint. epoxy fillers and fibrous materials. High shear forces.

NEV

		- 1	
		- 1	
		- 1	
	v	- 1	
M	ı.	- 1	
24		- 1	
10	F	- 1	
	,	- 1	
		- 1	

DLX 152	40-65kg	Ø152mm	590mm	16mm	HEXAFIX ⁸	1200	161
DLX 152	40-65kg	Ø152mm	590mm	16mm	M14	1200	161

Turbo Paddle H.D.

Flat base eliminates bucket damage



Universal Paddle Stirring Part HD

A mixing paddle for everything! Fast clean 100% consistency. Angular for 540mm standard drills. Zinc plated steel, 10mm shaft diameter, basket diameter 125mm.



Economy Stirrer 100 x 580mm 120 x 735mm



625 900

625 000

SUBFLOOR PREPARATION

POLYPLAN Spiked Aeration Roller

With splash guard and telescopic handle.

Aids air-flow and aerates smoothing compounds. Available in 12mm and 31mm spikes.













Features:

- Aluminium frame and stainless steel blades
- · Stainless steel pins
- Adjustable 1-20mm
- Suitable for epoxy coatings, latex pumped screed and self-levellers
- · Replaceable pin-bar
- Complete with wooden handle

Janser pin leveller







iTOOLS - by Janser

Screed and Adhesive **Upright Trowels**

This complete upright trowel system allows for quick and efficient application of all types of screeds and adhesives.

iTOOLS upright screed and adhesive trowel kit is ergonomically adjustable, allowing for a correct working posture.

iTOOLS upright screed and adhesive trowel kit gives you the following advantages...

- Much faster spread of screeds and adhesives
- Ergonomically correct posture, facilitating the workload
- The unique, groove-free design of the blade holder makes it easier to clean
- It is possible to use the trowel while standing and without making "whirls"
- The tools are durable and will last many years due to high quality workmanship and materials

Why kneel when you can stand? This system is seriously fast! Adhesive fumes kept at a distance at arms length

Adhesive Trowel Kit

(without insert)

28cm inserts required see page 21



28cm (11")

Replacement notch holder For adhesive trowel

28cm (11")

262 361 600





Screed Trowel Kit

(complete with insert) R1

Kit complete with telescopic handle.

Kit - 56cm (23 ½")

262 361 700

10 pieces R1 Insert 10 pieces R2 Insert

262 345 800 262 345 900

Pin Leveller

For application of thick layers of screed with fibres.



handle - 60cm (23 ½")

262 361 430

Pins - Set of 2 pieces

262 361 450

STATIC CONTROL

Copper Tape

Conducts static charge to earth



50m (55yds) roll

161 240 000 161 245 000 200m (297yds) roll

SUB FLOOR REPAIR

Corrugated Connector

For bridging cracks & grooves in screed



161 212 100

70 x 6mm (2 1/32" x 15/64")

AQUAFOX Tap Adapter

NEW



Especially suited for work with levelling compound or fillers when the measuring bucket doesn't fit under the tap.

Fits almost all single-lever mixers and bath tub fittings!

Complete with hose adapter and 1m length of hose.

Tap Adapter 111 214 111



TROWELS - SCREED/SMOOTHING





THE FEEL-GOOD FACTOR

NEW Range with edge guards and soft-grip handles























TROWELS



161 782 000



Trowel Blade - A2

161 783 000



161 784 000



ADHESIVE SPREADERS

With wooden handle & fixed blade. For all notch style options see our main catalogue.
























for use with notched inserts

see page 21 for inserts



With wooden handle.



Use inserts - see page 16

18cm (7") 262 310 000

Thriftline Trowel - 21cm (8 ½ ")

With wooden handle.



21cm (8 ½ ") 262 311 000

Thriftline Trowel - 28cm (11") With wooden handle.



28cm (11") 262 312 000

For inserts for all trowels see page 21

Spread Trowel - 28cm (11")

Without insert. Traditional handle of lacquered wood. Spring steel blade.



Spread Trowel - 28cm (11") 262 340 000

Fan Trowel - 28cm (11")

Without insert Shaped plastic handle for comfortable grip. Spring steel blade without rivets.



Use 28cm inserts

Fan Trowel - 18cm (7") Fan Trowel - 28cm (11") 262 310 300 262 312 300

Coloquick Spreaders

Spreaders with comfortable rolled grip. Made of aluminium for use with interchangeable inserts.



Use inserts - see page 21

Coloquick - 18cm (7") Coloquick - 28cm (11")

BIG AREA TROWELS - 560mm (22")

for self levelling compounds

560mm



With handle and with notch profile R2

Hardened and polished spring steel blade and blade clamp. Metal pole socket.

Use 2 x 28cm or 1 x 56cm blade.

560mm Big Area Trowel 161 760 000



With handle and with notch profile R2

2 adjustable stainless steel levelling pins for precise application. Includes R2 insert.

560mm with pins 161 762 000

Inserts for Big Area Trowels



262 345 000 28cm (11") 10 pieces 262 345 800 56cm (22") 10 pieces



262 345 700 28cm (11") 10 pieces 56cm (22") 262 345 900



SUBFLOOR & SURFACE TREATMENT

Notch depth mm A
Notch width mm B
Tooth width mm C A
Notch angle ° D

Inserts now supplied in solid plastic sleeves for safety & protection.

Insert profiles to actual scale

		miscrepi	offies to act	dai scarc
Notch Profiles Double-sided notch	Drawings at actual scale	18cm (7") 10 pieces	21cm (8 1/4") 10 pieces	28cm (11") 10 pieces
Notch depth mm Notch width mm Tooth width mm Notch angle	1.1 1.5 0.5 55°	262 316 000	262 320 000	262 324 000
A2 Notch depth mm Notch width mm Tooth width mm Notch angle	1.4 1.7 1.3 55°	262 315 000	262 319 000	262 323 000
A3 Notch depth mm Notch width mm Tooth width mm Notch angle	1.5 1.6 0.4 45°	262 330 000	262 334 000	262 337 000
Notch depth mm Notch width mm Tooth width mm Notch angle	0.75 1.1 0.4 55°	262 332 000	262 335 000	262 338 000
A5 Notch depth mm Notch width mm Tooth width mm Notch angle	1.0 1.35 1.45 55°	262 333 000	262 336 000	262 339 000
Notch depth mm Notch width mm Tooth width mm Notch angle	2.0 6.0 2.6 55°	262 314 000	262 318 000	262 322 000
B2 Notch depth mm Notch width mm Tooth width mm Notch angle	2.55 3.0 2.0 55°	262 313 000	262 317 000	262 321 000
Notch depth mm Notch width mm Tooth width mm Notch angle	3.25 3.7 3.3 55°	262 326 000	262 327 000	262 328 000
B5 Notch depth mm Notch width mm Tooth width mm Notch angle	5.15 5.7 14.3 55°	262 325 000	262 325 200	262 325 300
B6 Notch depth mm Notch width mm Tooth width mm Notch angle	3.6 4.1 4.9 5.5°	262 326 700	262 327 700	262 328 900
Notch depth mm Notch width mm Tooth width mm Notch angle	5.0 6.1 7.9 60°	262 326 600	262 327 600	262 328 600
B15 Notch depth mm Notch width mm Tooth width mm Notch angle	6.3 5.6 6.9 45°	262 326 900	262 327 900	262 328 990
SZ Notch depth mm Notch width mm Tooth width mm Notch angle	6.0 5.0 5.0 45°	262 326 400	262 327 400	262 328 400
PA Notch depth mm Notch width mm Tooth width mm Notch angle	5.0 6.0 5.0 60°	262 326 500	262 327 500	262 328 500
S1 Notch depth mm Notch width mm Tooth width mm Notch angle	2.55 1.8 0.1 30°	262 326 200	262 327 200	262 328 200
S2 Notch depth mm Notch width mm Tooth width mm Notch angle	3.35 4.2 0.1 60°	262 326 300	262 327 300	262 328 300
S4 Notch depth mm Notch width mm Tooth width mm Notch angle	5.05 10.3 0.1 90°	262 326 100	262 327 100	262 328 100
			28cm (11")	56cm (22") 10 pieces
R1 Notch depth mm Notch width mm Tooth width mm	3.0 4.0 1.5		262 345 000	262 345 800
R2 Notch depth mm Notch width mm Tooth width mm	5.0 4.0 2.0		262 345 700	262 345 900
R3 Notch depth mm Notch width mm Tooth width mm	5.0 6.0 2.4		262 346 500	262 346 600



Trowel Red Handle 682-TH



This plastic moulded handle has a 3.8cm (1 1/2") round red cushion grip with large ribs around the length of the grip.

Red Handle

682-TH

Comfortable solid rubber grip handle is made of easy to clean solvent resistant plastic. The handle securely fastens to the blade by simply aligning the slotted openings of the handle with the steel button projections of the blade and tapping trowel edges on the floor until tight and the front button is covered. To remove blade, simply tap trowel on opposite end.

Handles and Blades sold separately.

Trowel Open Handle 682-TH

Made of moulded aluminium and plastic, this sturdy open-end handle has the same feel of a fixed handle trowel

Open Handle

684-TH

Trowel Blue Handle 682-TH



This plastic moulded handle is 3cm (1 1/4") wide with a flattened top and sides, has a smooth blue cushion grip and is excellent for use in toe space areas.

Blue Handle

683-TH

VERSABLADE® Trowel Blades

7,694,380 B 8.151.404 B



notch 1.5mm x 0.8mm

Fine notch blade FFA-1

Produced from premium quality full tempered bright polished spring steel for a long lasting edge. Blades are flexible and measure 11.5 x 29cm (4 1/2 x 11 1/2")

- Blades notched on all four sides
- Other notched profiles available.



Flat trowel for screeds

notch 2.5mm x 2.5mm

Deep notch blade

RCA-1

SPECIAL TROWELS

Swimming Pool Trowel

Two rounded edges for core finishing work and mark free trowelling. Short shank for flexibility.



36cm (14")

SP14 B5

Mini Trowel - Soft Grip



20cm (8")

Economy Trowel - Soft Grip



28cm (11")

373 507

INDUSTRIAL ELECTRIC FAN HEATER

This great new tough, steel heater is ideal for heating up rooms to a fitting temperature, drying out screed, warming up sheet materials and carpet.

- Fan only, plus high and low heat settings with adjustable thermostatic control
- Thermal cut-out overheat protection
- Insulated handles for safe handles

TECHNICAL SPECIFICATIONS

Power supply 230V 16A 3kW Max Output

302 x 334 x 390mm Dimensions 5.6kg

3 Phase Models with greater output (up to 30kW) also available



3kW Devil

HYGROMETERS & MOISTURE MEASURES

PROTIMETER - Mini Indicator

- General purpose moisture meter for building surveying, timber inspection and a range of other applications.
- · Moisture probe 'cal check' and wood calibration table
- · LED display and carry case.
- Range 6 90% WME.
- Simple button operation.
- Colour coded scale shows moisture level at a glance Green/Dry – Yellow/Risk – Red/Wet.

Mini Protimeter DIGITAL

BLD 5702



PROTIMETER - Aquant Indicator

- Radio frequency measures relative moisture to nominal depth of 10-20mm.
- · Non-destructive no pins, no drilling.
- · Ideal for checking concrete, plaster, masonry and fibreglass.
- Digital display that is synchronised with a colour coded LED scale Green/Dry - Yellow/Risk - Red/Wet.
- · Simple to use, by holding against surface to be measured
- Scale 0-1000 Depth 10-20mm Weight 150g.

Aquant 2 BLD 5765

PROTIMETER - Surveymaster

 Dual-function combining two pin inspection method (measure mode) for surface dampness with a non-destructive radio frequency technique (search mode) for below surface dampness.

Range 70-999 relative (non invasive)

DRY (GREEN) - 70-169 AT RISK (YELLOW) - 170-199 WET (RED) - 200-999

Non Invasive reading to 19mm, with Pins to 12mm

Surveymaster

BLD 5365

PROTIMETER - HYGROMASTER 2

- Large LCD display at touch of button.
- · RH, ambient & dewpoint temperature.
- Hygrosticks can be used to measure the equilibrium RH value in floors & walls.
- · May be used as optional surface temperature probe.
- · Supplied in case with one HYGROSTICK.

Hygromaster with Hygrostick Hygromaster with Quickstick

BLD 7750 BLD 7751



Optional Accessories

Humidity Sleeves with caps

For use with MMS or Hygromaster - Measures equilibrium RH value (20 Per Packet).

> Pack of Sleeves BLD 4902

Humidity Box

Use with MMS or Hygromaster to measure surface %RH in solid floors. Insert hygrostick into side hole plug.

Humidity Box

BLD 4711

Hygrostick



- Replacement hygrostick for MMS/Hygromaster
- Range 30-100% RH

1 Stick BLD 8750

Quickstick



- Replacement quickstick for MMS/Hygromaster
- Range 1-100% RH for air quality application

1 JULK

POL 8750

Certified Hygrostick



For MMS/Hygromaster with 3 point calibration certificate.

1 Certified Stick

BLD 4750B

HYGROMETERS & MOISTURE MEASURES

PROTIMETER - MMS2

The complete moisture measurement and diagnosis system for building environments. The very latest Protimeter technology in one 4 in 1 system - search, measure, humidity, surface temperature.

- · Instant readings at push of button
- · Continuously logs if left on site
- Diagnose the extent of moisture intrusion
- · Monitor drying out
- Use deep-wall pin type probes to measure wall moisture, subfloor & surfaces
- Non-destructive and pinless radio frequency measures 19mm below surface
- · Measure RH and temperature dewpoint and surface temperature
- Detects mould or fungus growth.



MMS2 Basic - to include:

- · Quickstick Short POL 8751
- BLD 5060 · Heavy duty moisture probe
- Calcheck device BLD 5086
- Operator's instructions
- 9v battery & pouch

Basic Survey Kit

BLD 8800



MMS2 Survey Kit - to include:

- Quickstick Short POL 8751
- Hygrostick POL 4750
- · Hygrostick extension lead BLD 5802
- · Heavy duty moisture probe **BLD 5060**
- Deep wall probes 5" (127mm) BLD 5020
- Calcheck device
- BLD 5086

BLD 7758

Operator's instructions

Software & download cable

9v battery & pouch

Complete Survey Kit **BLD 8800-S**

Optional Accessories

Hygrostick Extension Lead



Extension Lead 800mm **BLD 5802**

Hammer Electrode

- Measures sub-surface moisture levels in wood
- Use with Mini MMS & Surveymaster



Hammer Electrode **BLD 5000**

Deep Wall Probes

- · Measure moisture at depth in walls
- · Use with Mini MMS & Surveymaster



HYGROMETERS & MOISTURE METERS

Moisture Indicator - CAISSON V1-D1 (Aucon)



The installer's favourite instant readout meter Features:

- Designed particularly for concrete, but can also be used on wood
- Non-destructive (no damage to surface or material) with measuring sensor located under the meter
- Immediate digital reading up to 3cm depth
- Complete with carrying case
- Battery operated simply place on surface to measure

CAISSON V1-D1 with case

110 410 000

ClimaPilot

Digital hygrometer for measurement of relative humidity and ambient temperature with dewpoint indicator.

- Practical device for monitoring room climate
- Digital display with max/min values
- Switch between ambient temperature/dewpoint



CP-1

SPECIFICATIONS

Ambient temperature measuring range: 0°C...50°C Accuracy: 20%rH...90%rH

Relative air humidity: Accuracy: ±5%rH (25%rh...85%rH) Dewpoint temperature: -28.6°C...47.9°C Accuracy: ±2°(

HYGROMETERS & MOISTURE MEASURES

Moisture Indicator VI-D4

Non-destructive method of accurately determining moisture content in concrete and cement without using pins.

Sensor type: spring pins, screen memory

7 available scales: Concrete (0-6% H2O) Cement screed (0-6% H2O) Cement screed (0-4% CM) Anhydrite screed (0-3.5% H2O) Anhydrite screed (0-1.9% CM) Caisson scale (0.3-15.3m) Relative scale (0-100%)

The measured value can be called up by pressing the tester lightly

The test device works on the principle of capacitive stray field measurement and allows testing of the moisture conditions in the near-surface region.

Vi-D4

Complete with carrying case





With DIN-7 connection for the use of sensors

This method of moisture determination is both quick and easy without any need to drill holes or leave damage. Using a pinless moisture meter is becoming the industry standard due to the ease of use over the older style moisture meters using pins.

With the VI-D4 pinless moisture meter, the sensor are positioned on the back of the moisture meter, allowing the user to use the device to measure moisture in very tight spaces and also being able to view the LCD display at all times.

Accessories

For connection to V1-D4 with DIN-7 plug compatible with GANN (UNI 2, HB 30, RTU 600

Air Sensor RFT-38C

For the determination of temperature and humidity

Air sensor

110 411 500



Bullet Probe B-60

For the non-destructive detection of building moisture

Bullet probe

110 411 600



Hydromette Compact -BL-

110 411 000

Electronic moisture meter used for different kinds of wood as well as for soft building materials and insulating materials.

The pins are pressed into the respective material and enable a precise measurement of the moisture content in sawn timber, chipboard, veneer and fibreboard materials up to a maximum thickness of 25 mm as well as normal gypsum or mixed plasters. After measurement the minimum and maximum values can be accessed in the memory storage depending on the building material.

Measuring range

Wood: 6 - 25 % moisture content Building materials: 0.4 - 6.0 % of dry weight

Fully equipped with battery, extra pins, protective cap and plastic box

Hydromette -BL-

110 223 000

Hydromette Compact B2 -BL

Electronic building moisture indicator using the high-frequency (dielectric constant) measuring principle.

Features 3-line LCD and versatile ball sensor for the non-destructive detection of moisture in all types of building materials. Also suitable for checking the dispersion of moisture in walls, ceilings and floors. An ideal pre-tester for use with all CM devices.

Measuring range 0 to 199,9 digits (scanning range) 0,3 to 6,0% by weight 0,3 to 4,0 CM%

fully equipped with battery

Hygrometer B2-BL 110 270 600

700

TRAMEX Flooring Inspection EZ Kit

A compact kit for instant and precise moisture testing of concrete and wood flooring. The Tramex CMEX II digital moisture meter allows the user to non-invasively test concrete per ASTM F2659, and the Hygro-i Relative Humidity probe for testing relative humidity, temperature and dew point in the environment, or performing BS 5201, 8203, 5325 & ASTM F2170. The Tramex heavy-duty wood pin-probe measures the moisture content of wood. The Flooring Inspection EZ Kit comes in a Tramex Easy-travel case.

FEATURES:

- Instant concrete moisture content test from 0 6.9% with CMEX II to ASTM F2659.
- Fastest, most reliable, Hygro-i2 ® RH probe for testing to BS 8201, 8203, 5325 & ASTM F2170.
- · Perform multiple tests simultaneously.
- Re-usable Hygro-i2 ® Relative Humidity probes prove to be the lowest cost per BS 8201 & ASTM F2170.
- . Test ambient site conditions of Temperature, RH, Dew Point & Mixing Ratio.
- . Backlit display for ease of reading in low level lighting.

All Tramex products are built with highest quality components, calibrated by hand, to exceed best industry standard and to give the user many years of service.

We supply a full one year guarantee against defects in parts & workmanship.

WATER Kit Includes -. CMEX II Concrete Meter · Hole Liners x 6 · Pin Probe for wood

- · Hygro-i2 Relative Humidity Probe

Tramex Flooring Inspection Kit

FZK 5.2

GREEN BOX

The ultimate in blades

Original Green Box blades - ice hardened 0.65mm (0.025") thick, grade 1 A quality in plastic dispenser for environmental protection.

Cutting edge quality exclusive to



Pack of 5 dispenser, each contains 20 blades = 100 blades









Straight HD blades 50mm (2")

Straight HD blades 60mm (23/8")



Deep Hooked Blades 262 036 500 262 037 500

Straight / hooked 262 034 500





100 blades in 10s in a strong plastic box. Sheffield made quality.









STANLEY Blades - original Sheffield made

100 blades in 10s in a strong plastic box



MOZART Premium Blades

HD x100 262 001 500 262 003 500



262 005 500 Deep Hook x100 262 004 500

TITAN-COATED GREEN BOX BLADES

The Titan coating ensures a considerably longer life of the blade. You will also have to change the blade less often, which saves time.

- · The Green-Box System is considered the quickest blade-change-system.
- Ice-hardened steel from Sweden, titan-coated, 3-angular-sharpened, in reliable environmental-friendly dispenser.

Pack of 5 dispensers

Dispensers contain 20 blades = 100 blades.

Titan Blades, straight 262 035 300

Titan Blades, hooked

262 036 300 Titan Blades, deep hooked 262 037 300

Titan Blades, concave 262 039 300



SPECIAL BLADES

Araseur



Slotted USA Style



100 Box 262 048 500 Hi-Tech



100 Box

Economy Deep Hook



100 Box

TRIMMING / SAFETY KNIVES

Flipper 3000

262 033 000



Complete with case (Box 12)

SHK-1

KNIVES



EWK-B

262 025 000

CUTTING DEVICES

MULTI-PURPOSE CUTTERS

PERFECT CUTTER

Speciality installation tool that enables perfect edge-cutting of floor coverings

Perfect cutter including 10 hooked and straight snap-off blades

Perfect cutter

H.D. blades 10 pieces 262 020 100 Hook blades 10 pieces 262 023 100

- Cuts perfectly around curves, posts and irregular walls
- · Works great on carpet, vinyl and sisal
- Special installation tool that ensures the perfect edge cutting of floor covering
- •Trims flush along walls •Unique design allows for a comfortable firm grip, added pressure and better control, which makes the cutter safer to use
- Easily adjusts for various pile heights Cuts with less effort because it cuts on a radius • Material being trimmed does not need to be creased • Smooth plastic base easily glides along wall . Durable steel construction . Uses snap-off blades
- •Ten straight blades and ten hook blades included.

Base Edge Trimmer - ARASEUR

Trims most floor coverings.

Base edge trimmer

262 259 000

Spare hooked blades 100 pieces

BB5

HiTech Trimmer

Adjustable cutting depth and angle.

HiTech trimmer

262 259 100

Spare hooked blades 10 pieces



Multi-purpose Wall Trimmer

Suitable for vinyl or carpet. Cuts material flush to skirtings.

Wall trimmer

247

Slotted Blade 100 pieces

262 048 500

Trim-Master Trimmer

- · Adjustable and reversible.
- Uses standard blades.
- · Adjusts both angle and depth of cut.

This trimmer has an adjustable throat to

accommodate varying pile height and density. Non-slip handle grip and an all stainless steel construction eliminate

discomfort and minimize rust.

. Use to trim carpet & vinyls

Trim-Master trimmer

262 259 200

JUTE & WOVEN BACK CUTTERS

Carpet Cutter

For Jute back.

Carpet cutter Spare blades 100 pieces 262 250 000 262 110 000

Jute Cutter - Metal

Nickel-plated steel with strong plastic handle.

Jute cutter - metal Spare blades 100 pieces 262 110 000



Loop Pile Carpet Cutter

Efficiently cuts most loop pile carpet regardless of thickness. Unique two-blade design accommodates both left and right positions for cutting closer to the yarn edge.

Complete with 15 blades Spare blades 100 pieces

262 048 500





Carpet edge cutter 262 281 000 Spare blades - 10 pieces 262 281 001

Loop Pile Cutter

Carpet Edge Cutter - Conventional "Deluxe"

For textile backed carpet. With 2 blade design to cut as close to the yarn edge as possible by using either the left or the right blade. Cutter can be adjusted to the thickness of the carpet. Comes with guiding rail and 2 spare blades.

Loop pile cutter

Spare blades - 100 pieces

262 048 500





CUTTING DEVICES



TAPICUT CUTTER - Nickel-plated

For absolutely clean cuts on all sorts of soft floor covering – especially foam back Full instructions for use

Tapicut

262 251 000

Blades - 12 pieces 261 252 000



Foam Back Cutter

Nickel-plated steel with strong plastic handle.

Cutter

768

Spare blades - 100 per box

768E



For foam back, blade angled, including 10 spare blades.

Carpet cutter

262 254 000

Two-hole blades - 100 pieces

262 255 100

Cushion Back Cutter

Nickel-plated steel with plastic handle. Slender guide keeps cutter in the rows.

CBC-1

Spare blades - 100 per box

262 048 000



The installers favourite!

Cushion Back Cutter 301

Cuts dense foam back. Bevelled guide keeps cutter in the rows. Nickel-plated.

Cutter

CRC-1

Spare blades - 100 per box

262 048 000

Cushion Lock Cutter 302

- 30° angle cut
- Close cuts for great seams

Cutter

CRC-2

Spare blades - 100 per box

262 048 000

POWERED CUTTERS

Electric Circular Cutter FORMAT 2

Light and powerful all purpose floor covering cutter for textile floor coverings up to a thickness of 15 mm ($\frac{1}{2}$ ").

Note:

shown here with optional strip cutter attachment.

856 100 003

230V FORMAT - Complete with case

856 100 000

HSS 10-sided blade

856 100 004

Cordless Rotary Shear (Battery)



Cuts most materials such as carpeting, linoleum, padding and heavy textiles.

Complete with battery and charger

Rotary Shear

856 140 000

HSS 10-sided blade

856 100 004

SHEARS Finest Solingen Steel



SHEARS Finest Sheffield Steel From the manufacturers of the famous Wilkinson brand (Est. 1760)





REPAIR TOOLS & SEWING

Utilise remnants or carpet from a hidden area to repair burns, rips, tears and other small damage.





















GROOVING MACHINES

Grooving Machine KFU 830



Very handy grooving machine for all synthetic materials, linoleum and vinyl. Copes perfectly with uneven floors and professional results are guaranteed. With adjustable lateral edge for non-slip safety pads.

120V 223 920 800

230V 223 920 000

TECHNICAL SPECIFICATIONS

230V or 110V Power Supply Input Circuit 830 Watt (1 HP) 5,000 rpm Revolutions Cutting Depth 0-5mm (0-3 1/6") Weight approx 4.5kg (10 lbs)

Complete with metal carrying case & dust bag, HM-elliptical grooving blade Z12Ø130 x 3.8mm (51/8" x 3/16"), Xtool kit.

Diamond blade recommended for safety flooring.

It is recommended to connect a vacuum cleaner to the adaptor that is part of the machine.

Spare Grooving Blades for KFU 830

HM Blade Ø 130mm (5 1/8") 223 920 001

Diamond blade Ø 130mm (5 1/8") 223 920 002

Spare Grooving Blades for KFU 800

HM Blade Ø 130mm (5 1/8") Elliptical Z12

223 900 002

Grooving Machine KFU 1000 E

The ultimate in grooving machines



- Reverse removal of chips.
- Infinitely variable revolutions (8,000 15,000 rpm).
- Large dust bag, easily removable for emptying.
- Infinitely variable cutting depth from 0-4.5mm (0-3/16")

230V 223 951 000

120V 223 951 800

TECHNICAL SPECIFICATIONS

230V or 110V Power Supply Input Circuit 900 Watt (1.21 HP)

Revolutions 8,000-15,000 rpm Cutting Depth 4.5mm

Weight approx 4.9kg (10.9 lbs)

HM Grooving Blade

12 teeth, elliptical Ø 120 x 3.3 x 20mm (4 $^{1}/_{16}$ x $^{1}/_{8}$ x 1 $^{3}/_{16}$ ")

223 950 200

Ø 120 x 4.3 x 20mm (4 1/16 x 3/16 x 1 3/16")

Complete with one elliptical grooving blade Ø120 x 3.3mm $(4^{1}/_{16}" \times {}^{1}/_{8}")$ in carrying case. Dust bag.

Extension Handle for KFU 1000 E

With this handle, the KFU 1000 E can be guided along the seam. It enables operation in a comfortable, upright working position. Solid aluminium finish, with built-in cutting depth control on the upper handle.

223 951 200

Diamond Grooving Blade

For safety floorings Ø 120 2.4 20mm (4 ½ 1/16 x 1/16 x 13/16")

223 950 300

LEISTER Groover

- Leister Groover Grooving Machine
- Perfect turbine technology dust extraction
- 3-point-support
- · Adjustable roll for non-slip pads
- 2-level-speed control: 14.000 + 18000rpm

HM Grooving blades Ø 110mm (4")

Trapezoid	3.5mm	(¾ ₁₆ ")	223 800 001
Semicircular	2.8mm	(½")	223 800 005
Semicircular	3.5mm	(¾16")	223 800 030
Semicircular	4.0mm	(3/16")	223 800 002

Diamond blade Ø 110mm (4")

Semicircular 3.5mm (¾10")

223 800 020



GROOVING TOOLS





SWIFT Groover

The ergonomic grooving tool for fast, consistent and clean seam-cuts for PVC and linoleum.

Easy operation by perfect cutting angle. Blade can be adjusted in depth.

Complete with leather pouch.

262 611 400

(Spare Blade - Order No. 262 611 410)





The two guides pins in combination with the guide plate allow a stable and secure operation following the seam.

Groover tool "GROOVY" by LEISTER



- Ideal for surfaces that are small and difficult to access
- Executing clean grooves up to connecting walls
- Precise and simple guidance thanks to integrated guide rollers

SWISS PRECISION!

"Groovy"

Order No. 262-611-800

Spare Blades 3.5mm Order No. 262-611-810







Standard Grooving Tool



GROOVING TOOLS





Triangular Scraper - for safety flooring

Triangular Scraper with carbide blade. Sharpened on 6 sides.

Triangular scraper 262 613 000 Spare blade - 1 piece 262 613 001

Triangular Scraper

With 3mm hardened blade. Special Steel, bevelled on all sides.

Triangular scraper Spare blade - 1 piece

262 607 000

Wall Groover - with unique adjustable blade depth

For U-shaped wall grooving. Especially good for use on thin wall coverings (e.g. showers)

Spare blade - 1 piece

262 629 000 262 629 100

High Grade Steel Ruler - 800mm

Use with Wall Groover as guide.

Suitable for all grooving tool use.

800mm Steel ruler 262 612 200

LEISTER

HOT AIR WELD GUNS

HOT JET-S - the world's smallest hand tool



HOT JET WELD GUN

Lightweight gun for repair work or welded joints and for welding in corners and confined areas. Great for walls and cap-cove welding.

224 815 000 **Gun 230V** 224 815 800 **Gun 120V**

· Lightweight

- · Low Noise
- · Ideal on walls too
- · Great for corners and curves in confined
- · Integrated gun stand and Standard Nozzle supplied

224 815 001 Element 230V Element 120V 224 815 801

HOT JET - S WELD KIT

Kit complete with:

- Regular Nozzle
- Speed Nozzle
- Grooving Tool
- Feed Rolle
- Spatula
- Cleaning Brush
- Carry Case

DIGITAL!

TECHNICAL SPECIFICATIONS

Power Supply 230V or 110V Heating Element 435 W (0.6HP Temperature 20-600°C (68-112°F)

0.56kg (1.23lbs) Weight

230V Kit 224 825 000 120V Kit 224 825 800

Element 230V 224 815 001 Element 120V 224 815 801

LEISTER HOT AIR WELDING GUN TRIAC AT

Air volume can be adjusted independently from temperature. Intuitive handling with "e-drive" display. Temperature measurement probe guarantees a precise temperature.

Complete with carrying case With regular nozzle

230V 224 823 000 224 823 800 120V

Set temperature reaches its level automatically

Voltage fluctuations are compensated

Precise temperature

Independent air volume

Heating Elements

Element 230V 224 828 001 Element 120V



TECHNICAL SPECIFICATIONS

110V/240V **Power Supply** Power 1600 W (2.14hp) Air flow 120-240L/min 40-700°C (104-1292°F) Temperature Weight 1.0kg (2.2lbs)

HOT AIR WELD GUNS - LEISTER

TRIAC ST - The new S

- 100% Swiss made quality
- 60 years of experience in making hot-air tools brought together in the new TRIAC ST
- The sturdy, professional hot-air tool that weighs less than 1kg/2.18lbs
- Functional design: two-component handle grip and optimum centre of gravity ensure ergonomic working
- · Quick clean air filters
- Automatic carbon stop (collector protection) and heating element protection















HOT AIR WELD GUNS

WELD- PRO BLUE

VINYL WELDER FOR FLOORLAYERS

WELD-PRO Gun

Includes:

- Standard and Speed Nozzle
- Carry case



TECHNICAL SPECIFICATIONS

42 100 120 200 230 for 50/60 Hz Voltage Power consumption W 960 1400 1600 1400 1600

°C 20 - 700, infinitely controlled Temperature

Air flow I/min max 230

Air pressure Pa 3000 (30 mbar) after about 24hr operation

Weight Kg 1.3 with 3m cord mm Ø 100 x 330 (Handle Ø56) Size

WELD-PRO Guns

230V Gun

224 838 000

120V Gun

224 838 900

Elements

230V Element

224 838 001

120V Element

224 838 901



- Traditional design
- Solid Construction
- Economically priced

Includes:

- Case
- Standard & speed nozzles
- P-Groover
- Feed roller
- Spatula & spatula guide
- Cleaning brush

WELD-PRO Kits

230V Kit

224 838 050

120V

224 838 950

Elements

230V Element

224 838 001

120V Element

224 838 901



HOT AIR WELD GUNS - LEISTER





For pressing cord into edges

and internal corner joints.



For sports floors,

repair work etc.

224 700 100

4mm (1/4") welding rod.





224 800 013

Speed Nozzle CA 7mm

7mm nozzle for

triangular weld rod.



224 800 007

Special Speed Nozzle

For wall coverings.



Cove cap nozzle

Bent Welding Nozzle Tip

150mm (5 1/4") Angled.







ROLLERS



ROLLERS / PRESSING TOOLS
















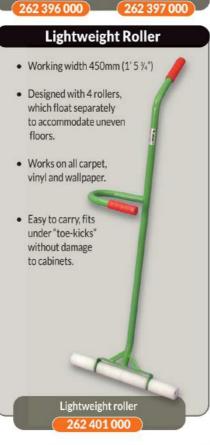





Total width

PRESSURE ROLLER

30Kg (66lbs)

TECHNICAL SPECIFICATIONS

3 Parts
Weight 30kg (662lbs)
Roll Ø 120mm (4 ¾")
Total width 310cm (12 ¾")

262 390 000

50Kg (110lbs)

TECHNICAL SPECIFICATIONS

4 Parts
Weight 50kg (110lbs)
Roll Ø 120mm (4 ¾ ")
Total width 510cm (20")

262 391 000

510cm (20")

262 400 000

TRIMMING TOOLS





horizontal position.

Trimming tool slim





perfectly flush with material, preventing damage to sheet. Finest Solingen Steel riveted handle.

262 623 000

Spatula Guide (Sledge) Use to trim weld, combined with spatula.

Leather Spatula Pouch

262 609 310

Essential for safety



Seam Plane

With adjustable blade

Trim excess weld rod with ease and accuracy in one operation with this double cutting tool.

Two slightly offset blades -The first trims the seam. the second trims perfectly flush!

Complete with 2 HSS-Blades Spare blades - 2 (pair)

262 626 000 262 627 000



262 625 000 Trimming Tool RDP



For trimming welding cord in roundings, outside corners as well as for cove-base jobs.

The special blade ensures that the floor covering won't be damaged.

With 2 spare blades Spare blades - 5 pieces

262 635 000 262 635 100



Exacto Tool - Metal 262 610 000 With metal handle and E1 blade. For trimming welded seams on internal & external corners. see spare blades below, 2 per pack 6mm Blade 262 610 001 12mm Blade E2 262 610 002 Diamond Blade E3 262 610 003 Stirrup Blade E4 262 610 004 Mixed Blades E8 (8 pieces) 262 610 008

TRIMMING TOOLS

Hot-Tip Equipment

Splice, Trim, Smooth & Repair





Great when installing cove base in corners

Trim inside corner welds
Cut coving weld grooves
Trim coving weld rod flush









Locking nuts complete with blades

WDD 984D





WDD 984

WDD 984E

Hot metal tool 120V

WDD 715

Bevelling Master

- Precise edges in no time 45° bevel on all types of material.
- · Bevelling and cutting without interim assembly.
- · Easy blade and adjustment change.

complete with 10 blades

262 244 700

Spare blades - 100 pieces 262 110 000



Edge Strip Master

Cut material in situ.

Especially designed for length cuts of large design sheets and tiles in order to fit them nearly flush to the wall.

Fast adjustment 1.8cm-34cm

Can be transformed quickly into a strip cutter for cutting skirting strips accurately.

complete with 20 blades

262 244 500

Spare blades - 100 pieces



PVC Edge Trimmer

For achieving a 25 degree mitre at PVC tile edges and design coverings after cutting.

complete with 6 spare blades

659 100 000



Spare blades - 6 pieces

262 262 00

Lino Edge Trimmer

For pre-cutting factory edges of linoleum

Standard - 12mm cut 262 415 000 Special - 25mm cut 262 415 500 Spare blades - 5 pieces 262 415 001



SEAM CUTTER - Vinyl / LVT

Precise cutting of plastic floor coverings LVT, needle felt etc, providing seamless join. Cutting depth up to 10mm. Possible to cut two layers at once with 2 mounted blades to form a perfect match.



Seam cutter + 10 blades

262 101 000

Spare blades x 100 pieces

262 110 000

LINOCUTTER

- · Cutting depth and cutting width are infinitely adjustable
- · Straight blades fro scribing and hook blades for cutting of thin coverings
- · Works with standard blade which saves a lot of cost and pays for the tool over time

Linocutter

262 412 500



LINOCUT

Seam-Cutter for PVC, linoleum and needle punch

- Blade adjustment
- For use in both directions
- Cuts from wall to wall
- Cuts the top sheet

Spare blades 57 E - 10 pieces



Lino and PVC Strip Cutters



For strip widths 0-11cm 262 246 500



For strip widths 3-20cm (13/16 - 8") 262 246 000



For strip widths 6-30cm (21/8-12") 262 247 300

Spares

Spare blades, large and small 5 pairs 262 247 100

Spare Web

262 246 002

Reversion set for blades 262 247 300

LAYING AIDS for VINYL, PVC & LVT materials

INSTALLATION KIT - for LVT design flooring

All you need for the

installation of design

flooring in one great kit

STARTER KIT

- 26" Stanley tool box
- 8m Tape
- PVC Edge Trimmer
- Chalkline
- 8oz Blue chalk
- 21cm Thriftline trowel c/w A2 blade
- Combi-Scriber Short
- Mitre Shear
- 18" Janser Handscraper
- Multi-roller
- Green knife
- HD Green Box blades (100)
- Concave Green Box blades (100)

LVT Installation kit

HS-VK-3



Wall Corner Template

For precise cutting of inside and outside corners of PVC or linoleum installations. Ensures a perfect result on corners and edges of cove base.

Comes with left & right side template.

For 100mm (4") cove base height

For 60mm (2 1/4") cove base height 262 147 000

262 148 000





Wall Profile & Mitre Templates



Templates for wall profiles



25mm (1") Radius 262 144 000 50mm (2") Radius 262 145 000

Mitre-Template 45°/90°



For 60mm (2 1/11") cove base height 262 146 000

VINYL SLITTER

Cuts strips fast, precisely and safely! Perfect for LVT strips!

LVT planks and tiles can be cut quickly, effortlessly and precisely for use as skirting strips or border work up to 20cm wide.

The movable second fence offers increased precision when cutting planks.


The circular blade can be adjusted in height and fully retracted for protection.



LVT HOLE CUTTER

Ideal hand tool to cut lyt for fitting around pipes etc. (4mm to 20mm depth range) lvt hole cutter

• Waterproof - long lasting • No shrinking or peaking at seam joints • Virtually invisible • 2 year shelf life

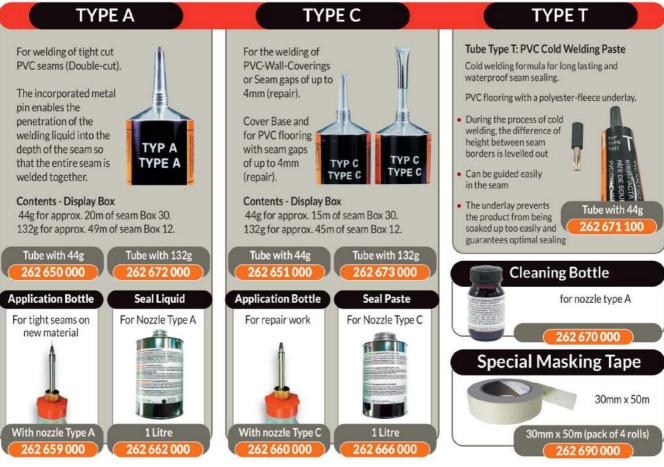

Cut





Apply

SCRIBERS



Scribing tools for hard flooring



Brass. For scribing when covering steps with nosing, maximum working range 56mm, for material thicknesses up to 8mm, overall length 100mm.

Spare needles - 25 pieces

262 132 002

Scriber with wooden handle Brass

Handle can be attached in three positions for horizontal and vertical scribing.



Same version as No. 401, but with three-way attaching 105mm long wooden handle, screws on both horizontally and vertically. Overall length, including horizontally screwed-on wooden handle 225mm.

262 156 000 Spare pins - 25 pieces 262 132 002

Short Recess Sciber Brass

Reverse scribers for hard flooring



Same version as No. 401, but with curved guide, overall length 110mm.

Reverse scriber Spare needles - 25 pieces 262 127 000 262 132 002

Seam Scriber with Handle



Seam scriber with handle Spare pins - 20 pieces 262 126 000

Double Scriber

Especially for laying PVC stair edges.



Double scriber 262 128 000 262 126 000 Spare pins - 20 pieces

Seam Scriber - Standard

Pins or blades can be used with this scriber.



Seam scriber - standard Pins & Blades - 5 of each

262 139 900 262 139 901

Short Seam Scriber (Armstrong)



Armstrong seam scriber 262 135 000 262 126 002 Spare pins - 5 pieces

Stair Scriber

For marking the rear edge.



Stair scriber 262 129 000 262 132 002 Spare pins - 20 pieces

Wall Scriber

With the use of a pencil, it enables you to trace along the wall Ideal to lay PVC or linolium skirtings or finishing strips. Length: 21cm

Max height: 20cm

222 430 000

COMBINATION & BAR SCRIBERS

Combination Bar Scriber - Cutting Scriber

Long version with adjustable cutter blades holder.

Combination bar scriber 262 132 000 pare blades - 6 pieces 262 132 001 262 132 002 Spare needles - 25 pieces

Combi Scriber - Short

Turning lower guide rail allows use as standard or recess scriber. Range of 385mm. Wheel passed over wall contour transfers to floor covering to depth of 410mm.

Combi scriber - short 262 130 000 Spare blades - 5 pieces 262 415 001 262 126 000 Spare needles - 20 pieces

Seam & Threshold Scriber

Handy seam scriber for seam and threshold work.

Seam & Threshold Scriber

Spare Pins (20) 262 124 000 262 126 000

PICA Green Pen

With replaceable speciality leads, marks and writes on all surfaces. Also suitable for dusty, raw, oily, wet and dark surfaces

Spare refills kit with

262 485 000 262 485 100

Spare refills kit with 8 special leads

4 x graphite leads

10 graphite leads

2 x coloured leads, red

2 x coloured leads, yellow

Spare refills kit

262 485 200

Wall Line Scriber

For transfering the wall line onto the flooring. Distance from the wall can be set from 2 - 35cm.

Wall line scriber Spare pins- 20 pieces

262 139 000 262 137 000

AIRWAY Scribers

These tools feature the original famous Airway quality design and construction - a heavy die cast housing, with a sturdy precision fitting plated steel bar.

The No. 11A Scriber has an extra needle hole in the housing to circle scribing and inlaying feature strips in a solid field. (Takes 21-N scriber needles)



Airway bar scribe 11-A

PERFECT BUTT™



The World's fastest professional worktop scriber tool. It completes traditional scribing chores with precision, speed and ease.

- Quick and easy to use by remaining stable whilst scribing directly onto work-surfaces, flooring, shelves etc
- It works by running a wheeled scribe unit along an irregular feature
- The sprung pencil in its centre will accurately copy the profile directly onto the work-piece to be installed
- It can then be cut and fitted to the surface resulting
- Four sizes of quick fit track wheels to cope with a variety of situations

Design Reg. 3014605



Perfect Butt"

PB1

MULTISCRIBE

The Multiscribe is a profile matching tool used to transfer contours from one shape to another and mark on to various materials.

- 15 functions including parallel scribe, convex scribe, contour profile scribing and line block
- Multi-function tool for a variety of marking out applications
- For use by all trades, carpenters, joiners, builders etc
- Built in spirit level and pencil sharpener
- Steel blade with 5mm & 1/4" graduations for profiling



COMPASS The drawing of circles with various diameters



PROFILE SCRIBE The drawing of an equidistant line parallel to a chosen edge



45° MITRE Makes a 45° to a given straight or flat surface



Multiscribe Professional

262 131 000

EASI-SCRIBE

Scribe flooring easily with flat base.



Easy one hand adjustment 1 - 40mm

- 0.5 guide plate with up to 50mm projection

Scribes architraves, skirtings, doors, panels etc

- Runs parallel line along material
- Flat base ensures consistent scribe

DIVIDERS



262 152 000 Pin Vice



Dividers - Bent Leg Section

150mm. Forged polished steel with one point slightly curved.



150mm with bent leg section 262 150 000

Pin Vice - Metal

Excellent for freehand scoring.



Pin vice - metal 262 136 000

Dividers - 4"

Fits in palm of user's hand, fixed bent leg and removable straight leg for pencil scribing.



Rickett Knife

Carbide tipped blade scores through surface ensuring clean break of material.

Rickett knife 262 026 000

Spare blade 262 026 001




STRAIGHT EDGES / RULERS



















STRAIGHT EDGES / RULERS

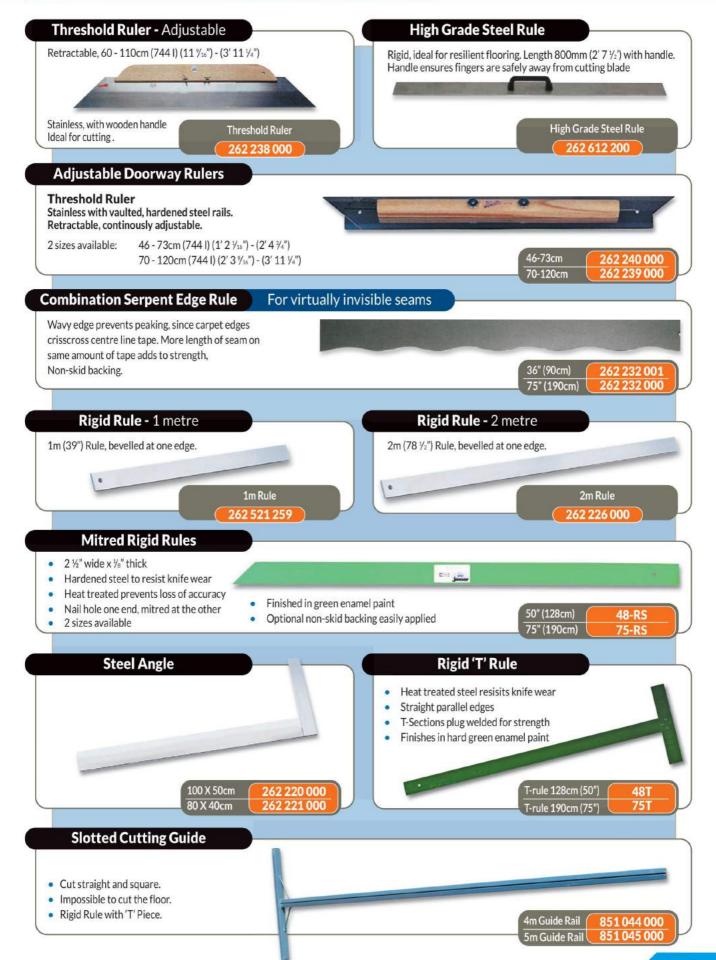

FLOOR TILE CUTTERS

H76 ALL PURPOSE TILE CUTTERS - 12"

Cuts clean edges on all types of resilient floor tile - even solid vinyl tile, a material too tough for the other cutters. Also cuts asphalt (without preheating), vinyl composition, rubber, cork, linoleum, felt-backed vinyl, marble translucent vinyl and marble chip epoxy tiles. Expertly designed to give the trade the fastest, most convenient and the most durable cutter available.



H76



Capacity 1/4" thick, 12 1/4" wide Weight 20lbs with castors & gauge

Overall size 18"w x 18 1/2" | x 8"h Construction

Steel & Aluminium alloy castings

REPLACEMENT PARTS

Upper blade	H-76-3
Lower blade	H-76-4
Castors (x3) + screws	H-76-5
Adjustable gauge	H-76-6

Lock nuts hold the thumb screws in position thereby preventing annoying and time consuming changes in the shear

angle adjustment.

- Tough tool steel blades, precision ground, specially heat treated and razor sharp - hand honed for best available cutting performance. Easily replaceable after years of service.
- Opper blade holding bar adjusts quickly to the proper shear angle and depth of cut for the various types of tiles. Easy to follow instructions packed with each cutter.
- Only a minimum amount of motion required to operate this spring returned handle. Cutting line stays in full view.

10

- 6 Hand carrying hole is shaped and positioned for better balance and more comfort than other brands
- Precision diecast gauge for accurate 45 degree and 90 degree cuts. Can be adjusted in only seconds to the desired setting. Notch at rear acts as a wrench for the shear angle thumb screw lock nuts - another convenient exclusive Gundlach feature.
- Donger table features both an inch and a metric scale. Gauge can be set for all sizes of lateral cuts - from maximum to absolute minimum.
- 1 Located within each upright housing are graphite treated steel (not soft die cast metal) slide bearings. They provide for minimum wear and positive retention of blade alignment for easier and cleaner cutting of tough to cut solid vinyl tiles.
- 3 1" ball type castors are optionally available for smooth and easy moving on the job. Castors leave no marks and move instantly in any direction. Without castors the tile cutter rests on 3 raised and beveled spots that eliminate bumping and chipping of uneven tiles

comes

with

1 guage

6

Exclusive offset table design permits holding the tile throughout the entire cutting operation. Eliminates time loss and aggravation from picking up cut tile from a flat table with worn fingernails.

H24 TILE CUTTER - 24"

Makes precise cuts on large tiles with ease.

- · Eliminates time consuming utility knife cuts and gives a perfectly straight and square edge.
- Use on rubber, vinyl composition or solid vinyl tile for straight cuts on 18", 50cm or 24" tile, or up to full diagonal cuts
- · Equipped with two adjustable gauges, one for 45° and 90° cuts and the other for 90° cuts only.
- · Dual measuring scale graduated every 1/8" and 1cm.
- · Equipped with 4 ball type castors for ease of movement.
- · Long wearing alloy steel blades precision ground for accuracy.

REPLACEMENT PARTS

Upper blade	262 249 501
Lower blade	262 249 502
Castors (x4) + screws	H-24-5
Adjustable combination straight/45"gauge (for 12" diagonal half cuts)	H-2445
Adjustable straight gauge 9 1/4"	H-2490

comes with 2 guages

H24 Tile cutter

262 249 500

TECHNICAL SPECIFICATIONS

Capacity 1/4" thick, 12 1/16" wide Weight 57 1/2 lbs with castors & gauge Overall size 29"wx27 1/4"lx8 1/2"h Construction Steel & Aluminium alloy castings

PVC Edge Trimmer

For the production of a 25 degree mitre at PVC edges.

With 6 blades 659 100 000 10 Spare blades 262 262 001

Lino Edge Trimmer

To precut factory edge of linoleum. Twin blades cut sheet


from both sides. 12mm cutting depth

Edge trimmer 5 spare blades

262 415 000 262 415 00°

FLOOR TILE CUTTERS







prefinished wood flooring, vinyl material, wood mouldings, laminate, etc.

- Fast and precise
- · Quiet and dust-free
- · Lightweight and portable
- · Long-lasting and economical
- · With built-in laser and mitre-guide

Parquet Cutter LX-340 476 000 900 476 000 910

TECHNICAL **SPECIFICATIONS**

Blade length: 375 mm (14 ¾")

Cutting capacity max. 9.5 x 340 mm (% x 13 %") 20 x 200 mm (% x 7 %")

Dimensions: 1066 x 524 x 463 mm (42 x 20 % x 18 ¼")

Weight: 13.3 kg (29.32 lbs)

Design Cutter MR 630

Suitable to cut:

- · carpet tiles
- laminate

Spare blade

- · engineered wood
- vinyl tiles

TECHNICAL SPECIFICATIONS


630mm (24 17/18") Length of blade: 16mm (¾") Max. material thickness: Max. object width: 620mm (24 7/16") Weight: 18.8kg (41.45lbs)

Design cutter MR 630

222 445 000

Spare blade

222 445 001



- · cutting width 24 inch
- · aluminium base
- · 4mm thick tungsten blade

Assembled size:

510 x 740 x 520mm (20" x 29 1/8" x 20 1/2")



MEASURING TOOLS

LEICA DISTO™ **D110** (

750 701

Typical measuring accuracy

± 1.5mm

Range

0.5 - 60m (197')

Dimensions

120 x 37 x 23mm

Weight

Protected against spray

water and dust IP54



Press a button to measure distances, calculate square areas and volumes fast - easy and precise.

- Small & handy
- Bluetooth smart
- Free app for smart phone or tablet
- Time delay release
- Stake out function.
- · Metric & feet and inches

LEICA DISTO™ D2 DISTO-D2

The laser distance meter with many talents Precise even over obstacles!





Staking out equal or different distances - Measuring inclinations

Measure exact distances and determine every angle fast and accurately.

- Addition/subtraction
- Area/volume
- Pythagoras function
- Bluetooth smart
- Automatic end piece
- Case and batteries

TECHNICAL SPECIFICATIONS

Typical measuring accuracy ± 1.5mm

Range


0.05 - 100m (328')

Memory

Illuminated Display

Protected against spray water and dust

LEICA DISTO™ X310 DISTO-X310



The laser meter with robust muti-functionality. Measure exact distances & angles fast!


- Indirect height measurement
- Smart area, volume giving ceiling, wall & floor areas
- Min / Max measurements
- Timer function 1-60 sec for delayed measurements
- Multifunctional end piece
- 4-line Illuminated display
- Recall of last 20 measurements

TECHNICAL SPECIFICATIONS

± 1mm Accuracy Range 0.05 - 120m Measuring range tilt sensor 360° Dimensions 122 x 55 x 31mm Weight 155g Protected against spray IP54

Super Square - Laser

- Simple 90° alignment with built in levelling feet
- Two highly visible laser lines 20m range
- · Perfect alignment for floor tiles
- Robust 90° metal lay edge for first tile alignment



Laser Line

water and dust

LLSS-90

Cloth Fibron Tape



10m/33ft 262 418 200 262 418 300 50m/164ft 262 474 005

8m & 10m HD Tapes



HD tapes in ABS case 20% thicker blade for a longer blade extension before 'break' is reached. Double rivetted for extra strength. (Metric & imperial)

10m

5m/16ft 262 483 000

Powerlock



The state of the s	202 -770 000
5m	262 471 000
8m	262 472 000
10m	262 472 001

Powerblade Tape

Powerblade - Komelon, 8m

J-PB/8

- · Extra wide and high-viz blade Double sided printing Push-button return Magnetic, dual-end hook
- Metal chalk line 262 420 000

Metal Chalk Line Plastic Chalk Line 30m (98' 5") metal



Plastic chalk line 262 420 100

Chalk Line Refill



White	8oz	262 421 000
Red	8oz	262 421 004
Blue	8oz	262 422 000

KICKERS & STRETCHERS

412 Deluxe Extendable Kicker

The installers favourite - easily adjustable.



JANSER - now with extra thick buffer as standard!

ş	Janser 412 Deluxe	23/412000
	Buffer pad standard	237 412 001
	Buffer pad extra wide	237 412 008
	Pin plate assembly	237 412 002
	Nap grip set of 3	237 412 003

214 - Chrome Finish

Classic Roberts design - easily adjustable.



214 Deluxe - Chrome	237 405 000
Buffer pad standard	41209
Buffer pad extra wide	41204
Nap grip set of 3	41203

CRAIN 605 Extendable Kicker

Finger contours on handle. Extra thick buffer.



CRIAN 605	CR-DK		
Buffer pad	237 412 009		
Pin plate assembly	237 412 106		
Nap grip insert	237 412 107		

GOLDEN TOUCH G.T.

High contoured neck, extra wide head, extendable. Pin plate non-slip.



Gorden Toden G.I.	01-301
Buffer pad	GT-501-B
Pin plate	GT-501-P
Nap grip inserts	GT-501-N

GT-2000

Extra row of pins for more grip, trigger adjustment,



GT-2000 Chrome	GT-2000
Buffer pad	GT-2000-B
Pin plate	GT-2000-P
Nap grip inserts	GT-2000-N

422 Extendable Knee Kicker

Extra wide buffer for knee protection.



422 Deluxe Knee Kicker	422
Buffer pad extra wide	237 412 008
Pin plate assembly	237 412 002
Nap grip insert	237 412 003

PRO-GEL KNEE KICKER 400

- · Soft gel-infused buffer pad
- · thick "bullneck" shaft
- Innovative pin-adjustment lever
- Extends 43 53cm
- · Five locking positions



	Pro-Gel Kicker 400	10400
	Nap grip inserts	10 505 13
	Base plate with teeth	10 505 14
	Extension stick assembly	10 505 16
u	Bumper, boot & gel pad	10 505 200

POWER STRETCHERS

POWER STRETCHER

Adjustable pin depth. Wide tail block has non-marking rubber pad and glides in any direction.

Operating length:

- Min. 87.6cm (34 ½ ") max. 6.7m (22') Extra tubes can be added. Metal case supplied.
- Weight 27.6kg (62lbs)
- Lifetime guarantee on tubes

Power Stretcher Extra Steel Tube 3'





Double Headed Stretcher

Handy tool with clean lines. serves both as a tubeless stretcher and a seam closing tool especially useful for matching up patterns. Complete in case.

Angle converts for tubeless power stretching.

Double headed stretcher



237 440 000

Power-Lok Stretcher (Swivel Head)



- · Lightweight aluminium tubes
- Low profile swivel head
- Locking handle avoids tube adjustment
- Variable pin penetration for different carpet thicknesses
- Complete with four tubes and one anti-lock tube
- Stretch up to 7m (23ft)
- Additional tubes available 1.5m (5ft)

Power-Lok Stretcher

237 410 000

OPTIONAL EXTRA

Carpet Stretcher Hook

Stretch from wood subfloors. Prong pierces through carpet underlay into wood subfloor.

Carpet stretcher hook

STAIR TOOLS



HAMMERS - MALLETS - DRIVE BARS



KNEE PROTECTORS



Softie knee pads

161 123 000

SOFTIE RANGE

The ultimate for comfort

Dual stitched re-inforced polyurethane coating for long life and comfort. These knee pads are made of 100% washable neoprene and have an extra large super-soft contoured 3/4" thick foam rubber insert pad for greater comfort. The front of this knee pad and will not mark or scratch floors. Quick and easy on/off. The single 3" wide front fastening velcro® strap. Non binding straps fit below the knee and prevent chafing, allowing these knee pads to be worn with shorts.



Original Softie - Large size



Softie knee pads - large 161 123 900

Leather Softie

Extra large - heavy duty. Brown leather.



Leather knee pads

161 124 000

'Camo' Softie - Large



Camouflage large Softie 161 125 900

Original Softie - GOLD & BLACK



Softie knee pads 161 124 500

Original Softie - HI-VIS GREEN



Softie knee pads - large 161 125 500

Super Soft,

Super

Comfortable!

KICKER Kneepad

- Cushioned top panel which impacts with carpet kicker buffer
- Super comfortable neoprene straps
- Lightweight yet robust to cope with carpet fitters prolonged use

Kicker kneepad

161 126 000

PROLINE GEL™ PLASTIC CAP

Air-injected GEL core for longer life. Ballistic nylon face resists abrasion and puncture. Superthick memory foam for extreme comfort Hard

smooth plastic cap for easy swivelling. Altalok™ strapping system designed for job site conditions.

Proline Gel

161 120 000

GEL RANGE

NOMAR GEL™ RUBBER CAP

Air-injected GEL core for longer life. Ballistic nylon face resists abrasion and puncture.

Superthick memory foam for extreme comfort. Rubberised cap resists marring. Altalok™ strapping system designed for job site conditions

Nomar Gel

161 122 000

FLEXLINE GEL™ FABRIC

Fabric. Air-injected GEL core for longer life. Ballistic nylon face resists abrasion and puncture. Superthick memory foam for extrem

comfort. Webstrip™ Surface will not

mark or scratch floors. Altalok™ strapping system designed for job site conditions.

Flexline Gel

161 121 000

With Rubber Caps

The rubber cap prevents slipping and leaves no marks on vinyl or wood floors.

With velcro closure straps



161 106 000

161 106 100

With Hard Plastic Caps

With hard plastic caps. The hard plastic Cap is durable on tough surfaces



161 105 000 161 105 500

SAFE-TEK™ - Washable

Kevlar - best on wood and carpet



SafeTek

161 106 200

KNEE PROTECTORS

MEDICALS

Medical Knee Pads

Developed with health & safety in mind. These knee pads give total support to the whole knee area, prevent tendon and cartilage damage.

Fast becoming the floorlayers favourite

CE DIN EN 14404 certified




Medical knee pads

161 109 000

161 109 001 Spare straps

WITHOUT knee protector: There is pressure on the unprotected knee cap.

WITH knee protector: The knee is cushioned and given total support.



100% Comfort. Over 100,000 pairs sold

FENTO Knee Protectors

- Support knees and lower legs
- Perfect fit
- Elastic straps
- Prevent back and knee problems
- Comfortable and secure
- flexible
- 100% waterproof
- Non-marking surface

Fento knee pad Spare Strap (2 pieces)



161 112 000 161 112 100

FENTO 200 PRO Knee Protectors

- Support knees and lower legs
- Perfect fit
- Elastic straps
- Prevent back and knee problems
- Comfortable and secure
- Flexible
- 100% waterproof
- Non-marking surface
- With washable inlays

Fento knee pad Spair Strap (2 pieces) Spare Inlays



161 112 100 161 116 010



FENTO 400 Knee Protectors

Long length complete protection



Fento 400 Spare Straps

161 113 000 161 112 200

Leather Knee Pads + velcro



With felt filling. Leather with velcro fasteners 161 107 001

Leather Knee Pads + clips



With felt filling & clips 161 107 002

Leather Knee Pads + buckles



With felt filling & buckles 161 107 000

KNEE - BLADES

Knee-Blades are perfect for installing wood or elastic floors, carpet, ceramic, concrete, skirting boards or other construction work.

- · Hook and loop, One Strap secure Knee-Blades comfortable with less tension on the knee
- Gel Pad, evenly displaces weight and lessons pressure on the knee
- · Goes from blade to Kneepad in the push of a button
- 360° Turning Radius for maximum mobility
- · Lightweight plastic for durability

Knee - blades

161 160 000



JANSER inserts - Flexipad

H.D. Foam cut to adapt to knee shape



FENTO 100

With excellent padding and breathable recovery characteristics.



Fento 100

161 117 000

SNICKERS HD beads

Brock beads circulate air in 3 dimensions. Sweat evaporates.



MATRIX (Redbacks)



Matrix 161 110 000

HEAT BOND IRONS



SEAM WEIGHT

The Seam Weight has a perforated white plastic base with an air space between the base and steel weight to allow heat and moisture to quickly dissipate. It performs better that a tool box tray because it exerts uniform pressure without discolouration caused by heat retention or by a rusty tool box tray. The white plastic base glides smoothly over the carpet and won't snag like a plywood tool box tray can.

Measures: 6" wide x 12" long x 3 1/4" high. Weighs 16 lbs. 612 SW

Seam weight

612 SW

HEAT SEAM TAPE



SEAMING TOOLS



















PROFESSIONAL GLUE GUNS





PROFESSIONAL GLUE GUNS



All-electric & extremely robust. Power-on light with removable integral stand with built in nozzle spanne

Melt rate

2.0kg (4 1/2 lbs)/hr

Glue Size

12mm (1/2") glue stick

Voltage

120V and 230V

Wattage

250W

Heater

Cartridge

Temp Control Hotmelt gun

Interchangeable thermostat 195°C (380°F)

Lowmelt gun

130°C (265°F)

Power cable Weight

3M (10ft)

Packaging

500g (18oz)

Plain Box (10 per ctn

Tec3150 Glue gun

Tec3400

High output all-electric 43mm (1 34") glue gun for industrial use. Extremely robust with electronic temperature control, automatic standby, plug-in temperature modules & power-on light.

Melt rate

3.5kg (8lbs)/hr

Glue Size

43mm (1 1/4") glue cartridge

Voltage

120V and 230V

Wattage

400W Cartridge Heater

Temp Control

Electronic plug-in temperature modules

Hotmelt gun

195°C (380°F) fitted, 130°C (265°F)

and 215°C (420°F) modules included

Lowmelt gun

Covered above 3M (10ft)

Power cable Weight

1.15kg (2 1/2 lbs)

Packaging

Plain Box (5 per ctn)

Tec3400 Glue Gun 237 089 000


12mm Glue Sticks

5kg (160 sticks) box

237 098 000

2kg (64 sticks) Polybag

237 098 200



5kg (160 sticks) box

237 098 000

2kg (64 sticks) Polybag

237 098 200



Carpet Edge Sealing Tips

These special glue gun tips allow carpet edges to be sealed with any hot melt glue compatible with carpet backings. Edges are sealed better and faster. Also, unlike other sealing methods, no time is lost waiting for the sealer to dry. The unique design of these tips assures excess glue is directed onto the backing of the

Carpet edges can even be sealed from a standing position without looking directly at the cut edge. All three tips function the same as the Plenum Area fills with pressurised glue, which is then forced onto the carpet edge. The Relief Area allows excess glue to vent to the carpet backing.



Tip orientation for proper edge sealing excess glue is directed onto the back



Use adapter valve with glue guns to give perfect adhesive application



No.4RS

Carpet Edge Sealing Tip

For right hand use with standard carnets



TIP-4RS

Carpet Edge Sealing Tip

For left hand use with standard carnets

No.4LS

TIP-4LS



No.4RE TIP-4RE



Hot Glue 2[®] Seaming Kit - 110V

For edge sealing and seaming commercial direct glue and double glue carpet installations.

The Hot Glue 2 Seaming Kit applies hot melt glue simultaneously to both edges of a commercial carpet seam to both seal and cut edges and seam the carpet in a single pass over a 2" wide fibreglass mesh tape. The specially modified glue gun applies hot melt through the patented, die cast zinc applicator tip which prevents glue from rising above the base of the

carpet pile. The applicator tip also applies glue to the carpet backing of both sides by directing glue to the underside to complete the seam.

Not designed for use in residential (stretch-in) carpet installations or on commercial carpet with attached cushion or pile height exceeding 1/4".



Meshtape Blocker

Meshtape Blocker tape prevents glue contamination on carpet edges.

Blocker tape



Glue Tape & **Glue Sticks**



MT-100

Glue tape and sticks

STAPLING SYSTEMS







Powerful tacker. Suitable for stapling plastic trim, insulation material, carpets etc. to wood.

Adjustable driving force.

riajustable arriving force.	7750	至.
Staples		- 1
8mm, x 5000	SH-	52
10mm, x 5000	RSH-	53
12mm, x 5000	RSH-	54
14mm v 5000	SH.	55

ROCAMA 3G-71 hd Tacker



Powerful die-cast aluminium. Fix upholstery, skirtings, panelling, wooden profiles etc

Staples	
8mm	ROC 168
10mm	ROC 1610
12mm	ROC 1612
14mm	ROC 1614
16mm	ROC 1616

SPOTNAILERS

MET 567 Electronic Stapler

For underlayment work.

Ideal for fast fixing hardboard and plywood, complete with quick clear nose and carry case.

MET 567 - 230V **MET 567**

MET 567 - 110V **MET 567 110**



- Effortless alternative to traditional Mallet Drive Stapler
- Fix 4 or 6mm ply securely and permanently.
- Vibration free fixing of gripper to treads and risers.
- Fixes deep pile carpets and natural floor coverings.
- Uses standard spot staples as below.

SPOTNAILER 5

Mallet Drive Stapler. Pre-set countersink for floor underlaying work. Applications - plywood,

Spotnailer tool

hardboard, underlaying.

Mallet

Mallet for Spotnailer Tool.



Mallet for spotnailer tool 8002

Spot Staples



Spot Staples (boxes off 5000)

16mm (%") 55DC 513 19mm (¾") 66DC 518 22mm (%") 77DC 523

Pneumatic Spotnailer - GUN



Pneumatic spotnailer gun only

· Uses spot staples as above

- 2 HP 10 bar oil-free compressor with pressure regulator, water trap & lubricator
- Kit with 10 metre airline
- Compressor in wheeled case

Pneumatic Spotnailer - KIT



Kit 230V Kit 110V

FS-KIT-110

STAPLING SYSTEMS

ME 4000

Professional Electronic Stapler

MSR-1



- Ideal for cap and band bull noses and open tread stairs.
- · Vibration free fixing of gripper to treads and stair risers. around bathroom fittings and architraves.

Available in 230V or 110V

- are hidden in the pile of carpets, foambacks and natural floor coverings.
- · Replaces the hammer-driven nail and strike tacker for fixing ply and hardboard.
- · Automatic countersink into hardboard and ply.

ME 606

Professional Electronic Stapler

ME-606



- Effortless alternative to the strike tacker or hammer for fixing hardboard and 4 or 6mm ply.
- Gives a secure and permanent fixing.

anser®

Available in 230V or 110V

- Vibration free fixing of gripper to treads and stair risers, around bathroom fittings and architraves.
- Will fix deep-pile carpets and natural floor coverings.
- · Brad facility not recommended for fixing scotia, quadrant, hardboard or ply.

ME 4000 STAPLES

Our Maestri 4000 series divergent staples comply with the Contract Flooring Association's recommendations for sub floor preparation. Divergent pointed staples 40/16mm for hardboard, 40/20mm for ply, gripper

16 20

All staplers supplied

in a robust carry case

16mm, 10,000 Pieces MSR-16 20mm, 10,000 Pieces MSR-20

ME 606 STAPLES

Our Maestri 606 series divergent staples comply with the Contract Flooring Association's recommendations for sub floor preparation. The same staples will fit our 606 pneumatic stapler. Divergent pointed staples 18mm for hardboard, 22mm for ply.

18mm, 4800 Pieces 606/18

22mm, 4800 Pieces 606/22

18 22

ME 30

Professional Panel Pinner



BRAD TOOL

- Suitable for secret nailing up to 12mm.
- Great for profiles and thresholds.
- Fix 6 meters per minute
- Pencil thin nose allows for accurate pin placement at any angle

BRADS

15mm, 7000 Pieces 606-B15

19mm, 7000 Pieces 606-B19

25mm, 5000 Pieces 606-B25

30mm, 4000 Pieces 606-B30

SE 30/08

Professional Veneer Pinner



VENEER PINNER

- Excellent on scotia or wooden trims.
- Leaves no visible pin head.

15mm, 6100 Pieces

20mm, 6100 Pieces

VP-20 VP-25

25mm, 6100 Pieces 30mm, 6100 Pieces

STAPLING SYSTEMS - Pneumatic

606 Pneumatic Stapler

The Ideal tool for medium to large flooring contracts.

- Uses standard Maestri 606 staples.
- 18mm and 22mm + 32mm fish hook plaster board nails.
- Maximum 4 shots per second.
- Fast bottom-loading for easy maintenance no allen key is required.
- Air consumption at 5 bar 0.6 litres per shot = 230 shots per min when run off ZH2004K 2hp compressor.

STAPLES - for 606

18mm Staples (hardboard) - 4800 per box

606/18

23mm Staples (ply) - 4800 per box

606/22

PNEUMATIC KIT



- compressor with couplings and 10m airline.
- 18mm Staples (hardboard)
- 23mm Staples (ply)
- Includes plastic wheeled transport box

606 Pneumatic Kit - 230V

MAX-KIT

606 Pneumatic Kit - 110V MAX-KIT-110

ME 606 PN

MK-2002 Compressor



2 HP, Oil free kit

With couplings and 10m of air hose.

10 Bar - 2 HP Constant - 8 bar 120psi

MK-2002 240V

MK-2002 120V MK-2002-110

Plastic Wheeled Box

For compressor and tool.



Plastic wheeled box 20MJ2058

Pneumatic Pinner

Great on scotia beadings & wooden trims Leaves no visible pin head

Brads type JA from 16-45mm Applications

- Safety device
- Adjustable depth control
- Lock-out safety device
- No-mark tip
- No recoil
- Exhaust silencer
- Beltclip
- Plastic carry case

- Decorative mouldings
- Glazing bead
- Hardwood trim
- Joinery manufacturing
- · Furniture manufacturing
- and more



TECHNICAL SPECIFICATIONS

1.2kg Weight 4-7bar approx. Operating pressure Air requirement 0.52 I/brad approx. 280(L) x 55(W) x 216(H)mm

Pinner 2FJA45

Pins - 16mm JA16-2000

Pins - 19mm JA19-2000

STAPLING SYSTEMS & TRANSFORMERS

Pneumatic Coil Nailer Kit MAX-238 KIT

MAX-MK238 (Collated Coil Nails)

Kit Comprises:

- · Model CN238 Mini Coil Nailer complete with carry case.
- · ZH2004K 2hp 10bar oil free compressor, fitted with pressure regulator, water tap and lubricator.
- · Compressor supplied in a strong wheeled box as above (20MJ2058).
- . 10 metre rubber airline quick release couplings.
- Compressor available in 230V and 110V for on-site use.

Nail gun only - 230V (MAX-CN238

Compressor only MK-2002

Ring Shank Nails Collated Sheet

Collated Coil Nails packs of 10,000

MAX-NAILS 2 2 x 19mm (ply)

2 x 22mm (hardboard) MAX-NAILS

2 x 25mm **MAX-NAILS**:

2 x 28mm MAX-NAILS 4

SFN-19 COIL NAILER



Pneumatic Nailer for driving collated ring shank galvanised nails fitted with adjustable nail depth control. Trigger lock eliminates accidental firing.

Complete with case.

SFN-19 Coil Nailer

SFN-19

Ring Shank Nails Collated Sheet

2 x 19mm (ply)

MAX-NAILS 1

2 x 22mm (hardboard)

MAX-NAILS:

Collated Coil Nails 2x25mm packs of 10,000

MAX-NAILS

2 x 28mm

MAX-NAILS

SFN-19 NAILER KIT

The SFN-19 Coil Nailer & ZH2004K Compressor **Underlayment Nailing Kits**

This is the complete Underlayment nailing system.

Just plug in and away you go!



The kit comprises of:

- Model SFN-19 Coil Nailer complete with carry case
- ZH2004K 2hp 10bar oil free compressor, fitted with pressure regulator, water tap and lubricator
- Compressor supplied in a strong wheeled box
- 10 metre rubber airline quick release couplings
- Compressor available in 240V and 110V for on-site use

Nailing kit - 230V

Nailing kit - 110V

SFN-19 110

M-K MASONARY NAILER

Fix gripper to concrete on floors and stairs. Fix skirtings and profiles to brick or breeze block walls 10 times faster than other methods

8 bar



M-K Nails

Other sizes available 15 - 50mm

20mm nails - 3000 box

20MK

Masonary nailor

MK-LT50 LA

TRANSFORMERS







STAPLING SYSTEMS - Pneumatic

COMPACT AIR STAPLER KITS

Perfect kits for smaller commercial jobs and all domestic jobs

230V Kit

110V Kit

German Technology

- 10 Bar, 240V compressor
- 142 PSi
- 4 Litre tank capacity
- Accepts 606 or ES range staples and Brads

KIT COMPRISES:

- Gun
- Compressor
- Hose

• 8 Bar, 110V compressor (0.5hp motor)

- Power 1/2 hp (0.3kw)
- 145 PSi
- Tank capacity 3.8 litre
- Accepts 606 or ES range staples & Brads
- Air displacement 34 litres/min.

KIT COMPRISES:

- Gun
- Compressor
- Hose

Kit 230V

ES40 VT SET

Kit 230V

ES40 SS SET

Pneumatic Gun only



TECHNICAL SPECIFICATIONS

280 x 55.5 x 216.5mm

Weight

Working pressure

8 - 101.5 psi

Max. Operating presure 101.5 psi

Air consumption 0.52 driving procedure at 87 psi

Pneumatic gun

ES40 2XR

Compressor - Mini

3.8 litre PC1010 Compressor h quiet, portable design with a 0.5HP motor and a 3.8 litre aluminium tank. Offering portable pneumatic power for a wide-range of applications, including 2nd-fix joinery, upholstery, sheathing, pipe-testing beading and trim. With its low-noise oil-less motor its even ideal in domestic situations. Comes with a comfort grip handle and is designed not to roll about in the back of the van Max. operating pressure - 154PSI, 8 Bar. Air displacement - 34 Litres/min

- 0.5HP 3.8litre. Oil free
- Draws only 4 amps
- · Quick disconnect coupler · 8 Bar



240V

110V

QUICK-DRIVE Collated Screw System



The perfect answer for fixing ply to metal raised access floor panels (uses 25mm zinc screws).

- Collated Zinc Screws
- Auto-feed attachment
- Attachment for nails
- Screwdriver motor
- Extension for stand up driving
- Screw Quiver

NEW VERSION

For all other "Quick Drive" applications please enquire.



Quick Drive Kit in case QD-76-FS-4300

Zinc Screws 25mm - (2500 per box)

DOOR TRIMMERS

Door BOSS by **JANSER UK**

The Door Boss enables doors to be trimmed in situ, in a precise and efficient manner.

The machine features simple thumbscrew adjustments for both height and depth of cut. Changing of the blades is also easy, with the use of the allen key provided. The well proven design of the unit offers the user a comfortable working position, giving maximum control during operation.

The motor is double insulated and a sliding guard ensures user safety. The unit is suitable for AC supply only 220 - 240V.

The machine is supplied with:

A tungsten carbide blade and comes complete with a robust, lockable, metal carrying case.

BOSS - 230V

228 840 000

BOSS - 120V

228 840 800

TECHNICAL SPECIFICATIONS

Power supply Motor power Speed 230V or 120V 1000W (5.5A) 5300 rpm

Spare Blades Ø184 x 1.6 x Ø20-40K

Tungsten blade

228 852 001

NEW & IMPROVED FOR 2019!

Height & Depth of cut can be adjusted 10-60mm Height Adjustment 0-60mm Depth Adjustment

11:11

11711



DOOR TRIMMERS, JAMB SAWS

Door Trimmer 'TWIST'



Machine turns 180° and cuts into almost any corner!

Adjustable up to max. 28mm from the base with splinter protection for clean edges without tearing

TECHNICAL SPECIFICATIONS

Power supply Motor nower 660W (0.9HP) Saw Blade-Ø 115mm (4 ½*) Swivel range 180 0-28mm (0-1 1/64") Cutting edge Weight 3.5kg (7.72lbs)

TWIST - 110V

TWIST - 240V

228 856 800

228 856 000

Spares & Accessories

Carbide Blade for wood -228 856 010 nailproof!

Carbide Blade for solid wood 228 856 030 228 856 020 Diamond cutting wheel

Sliding Cover to work on delicate surfaces (wooden floors, varnished/coated surfaces) 228 856 110

Guide Rail Length 700mm 228 856 200 Guide Rail Length 1400mm 228 856 250


228 856 210 **Guide Shoe**

Suction Pads for guide rail 228 856 220

Screw Clamps for guide rail

228 856 270







Fitting door frames



Cutting grooves

JAMB SAW - for wooden door jambs & base boards

Long Neck Undercut/Jamb Saw 240V only

Features:

- Dust port
- 1100W
- Adjustable depth guide
- Blade height adjustment 0-30mm
- Cuts up to 43mm thickness
- External "tail" gives max. leverage
- Easy access trigger for more control
- Strong moulded carry case
- Supplied with carbide-tipped blade



Spare blade-long neck

Long neck PLUS - now with masonry blade

> Ideal for trimming door frames

Spare Blade **Original Saw**

Original Standard Jamb Saw blade

Spare blade- Standard



Jamb saw inc. carry case

SUPER SIX 6" Jamb Saw

- · Adjustable cutting depth guide prevents cutting into plaster or wall board when trimming base boards
- · Powerful, 900 Watt industrial grade power unit has all ball and needle bearings
- Patented design enables saw to cut full inside corners in moulding up to 1/2" thick

(110V only)

- · Spiral ground gears for smooth, quiet operation
- · Precision height adjustment from 'flush' to 1 1/16'
- Doors as thick as 1 ¾" can be undercut without removal
- Includes 6 ¾16" 36 tooth carbide tip blade
- · custom moulded carrying case



HAND SAWS, MITRING & SHARPENING









Profile Master Templates

Spare blade 228 860 001

in pocket form.

Carborundum-File For sharpening trimming tools

(Quarter Moon Knife, Xacto-Tool etc)

262 891 000

262 609 101

Dia clip

File

Reversible 228 864 000




The Leader in Diamond Sharpening! Sharpens blades, quarter moon knives and other tools.



With wooden case.

Diamond block 262 890 000






F70 Diamond Whetstone that travels with you. It has a flip open lid/handle and a swivel ring for a key chain. 140mm when open, this is the perfect pocket. knife accessory. Effective on the hardest stainless steel blades, tools and sporting goods. Handle folds easily for protected storage

Standard Mitre Box

HDHB

Spare blades x 5





Steel Mitre Box



245 000 000

Steel Mitre

Case containing 2 adjustable templates which can be joined together enabling precise intricate pattern work to be done. Floorboards can be precisely marked in a time saving manner. Case of 2 templates, 20cm (7 %") each &

1 setting angle 40mm (1 1/2")

Profile Master

464 066 000

FEIN MULTIMASTER - New Model













E-Cut-Saw Blade



Precision E-Cut-Saw Blade

Highest cutting speed and precision thanks to double-row JAPAN toothing. For wood up to 50mm, drywall and soft plastics.



TOOLS FOR WOOD & LAMINATE FLOORS



Floor Wedges

Floor wedges make it easy to ensure the correct distance between the wall and floorboards.

Advantages of the iTOOLS floor wedges are:

- Easily adjusts from 8-15mm
- Keeps its setting
- Greatly facilitates the laying of the initial boards
- Can be used for all types of floorboards
- Easy to detach the floor wedge using the uniquely designed strap
- Can easily be taken apart and then quickly be deployed again

20 pieces in blister pack 464 055 840 100 pieces in blister pack 464 055 830



Installation Set for Wooden Floors

- 20 fitting edges 4x5.5cm (1½" x 2¾6")
- 1 plastic fitting block
- 1 chisel, felt-protected 29x3cm (1"x 1 ½")

Parquet Shunting Tool

440 005 000

444 006 000

464 052 300







For setting the tension of parquet and laminate flooring.

Clamping capacity: 4m (13")

Extension strap available: Length 4m (13') with clamp

Extension Strap

Wall Spacer



The handy wall alignment brace for setting the distance to the wall and adjusting the tension of the floorboards

464 055 000

Short, 43cm (17")

Long, 55cm (22")



SHUNTING DEVICES

- Combines shunting and hammering
- No damage to tongue and groove
- Easy access under radiators

LUKAS Junior

Without extension



With extension Necessary for shunting underneath radiators

464 090 000



TOOLS FOR PARQUET & REPAIR KITS







Hard wax kit

475 150 000

Soft Wax Kit

Laminate repair kit for scratches, small holes, pressure marks and gaps, 20 colours.

An invaluable aid to avoiding expensive repairs and calls back costs.

Supplied in wooden case.

Knot filler kit also available.



475 000 120

NOVORYT Special Set 40 for trend surfaces

Special colour composition for design, laminate, linoleum and real wood floors

Melting Kit Set 40 SPECIAL included in plastic case:

40 pcs. NOVORYT melting putty

includes colour mixing aid

- 5 pcs. retouch pens, valve system
- 1 hot knife, gas operated incl. spare gas bottle
- 1 plastic spatula
- 1 stripping blade
- 1 cleaning cloth for hot knife
- 2 sanding fleece

Replacement colours can be ordered separately



40 Set	475 020 400
20 Set	475 020 000
60 Set	475 020 060

Retouch Pens valve system

Pens which don't dry out

10 pcs. retouch pens, valve system wood colour varnish in PET-Box and 10 pcs. replacement tips

Includes:

mahogany beech natural cherry light teak larch oak light alder oak dark walnut spruce



Retouch Pens 475 020 450

NOVORYT Forte Sticks

475 400 000

Optimal reproduction of knots on wooden surface 12mm sticks. Use with standard hot-melt glue guns.

SPECIAL FEATURES:

- fast drying
- does not contain any toxins
- can be painted over with all conventional lacquer systems(solvent-based / water-based / UV-based as well as wax and oil systems)
- no sticking or sacking
- can be melted again after drying
- light and elastic in, adapts to normal movement of the parquet floor
- functionality equal to a 2 component product (filler & hardener)
- melting point 140-150 degrees
- processing with standard melting guns (temperature must be adjustable)
- any colour tone possible



- rubber tree light

transparent

- spruce light

- - ebony

 - wenge
 - oak rustic
- moor oak natural oak - larch douglas fir

- dark walnut tree

GAP-FILL

Polycrylate-based sealant free of solvents and silicone. It has high bonding power and is water resistant.

Seals floor joints and cracks in wooden floors, baseboards, and laminates with fast drying, paintable fill that comes in various colours.

Ask for our sample colour chart

Advantages:

- elastic
- solvent free
- quick drying
- can be sanded & varnished





LAMINATE GUILLOTINES







LAMINATE GUILLOTINES

ECONOMY Laminate Guillotine

Features:

- Low cost
- Safe and easy
- Fast and accurate
- · Silent and virtually dust free
- Solid construction

TECHNICAL SPECIFICATIONS

Cutting width
Cutting thickness
Cutting angle

200cm (8") 11mm (75") 90° facility

Roughneck guillotine

RNG ECON



COVER STRIP GUILLOTINE







ABRASIVES FOR SANDING

SANDING BELTS • SANDING ROLLS • SANDING SHEETS • DISCS



TIGER / LEOPARD / Hummel / Viper

Standard Quality 750 x 200 mm (29½ x 8")

TOP Quality

750 x 200 mm (29½ x 8")

Per piece	Order Code
Grit 16	441 770 000
Grit 24	441 771 000
Grit 36	441 773 000
Grit 40	441 774 000
Grit 50	441 775 000
Grit 60	441 776 000
Grit 80	441 777 000
Grit 100	441 778 000
Grit 120	441 779 000

JANSER Sanding Belts



JAGUAR/PANTHER/HARLEQUIN

Standard Quality

480 x 200 mm (19x8")

Per piece	Order Code
Grit 16	441 921 000
Grit 24	441 922 000
Grit 36	441 923 000
Grit 40	441 924 000
Grit 50	441 925 000
Grit 60	441 926 000
Grit 80	441 927 000
Grit 100	441 928 000
Grit 120	441 929 000



for sanding drum **PROFIT**

Standard Quality

550 x 200 mm (21½ x 8")

Per piece	Order Code
Grit 16	441 908 000
Grit 24	441 901 000
Grit 36	441 902 000
Grit 40	441 903 000
Grit 50	441 904 000
Grit 60	441 905 000
Grit 80	441 906 000
Grit 100	441 907 000
Grit 120	441 910 000

Premium Quality Sanding Belts

With zirconium corundum and extremely wear-resistant Y-cloth backing.



TIGER/LEOPARD/Hummel/Viper

Premium-Quality ZIRKON

750 x 200 mm (29½ x 8")

Per piece	piece Order Cod	
Grit 24	441 710 000	
Grit 36	441 711 000	
Grit 40	441 712 000	
Grit 60	441713000	
Grit 80	441 714 000	
Grit 100	441 715 000	
Grit 120	441 716 000	

Sanding Paper Rolls



Roll 50m (164")	Order Code
Grit 16	441 539 000
Grit 24	441 540 000
Grit 36	441 541 000
Grit 40	441 543 000
Grit 60	441 545 000
Grit 80	441 546 000
Grit 100	441 547 000
Grit 120	441 548 000

VELCRO SANDING DISCS 6" & 7"

Ø150mm

PANDA



		The second secon
Per piece	Pack of	Order Code
Grit 16	(25)	444 101 100
Grit 24	(25)	444 101 200
Grit 36	(25)	444 101 400
Grit 40	(50)	444 101 500
Grit 60	(50)	444 101 600
Grit 80	(50)	444 101 700
Grit 100	(50)	444 101 800
Grit 120	(50)	444 101 900

Ø150mm

PANDA



TOP Quality

Pack of Order Code Per piece Grit 16 (25)444 802 016 Grit 24 (25)444 802 024 Grit 36 (25)444 802 036 444 802 040 Grit 40 (50)Grit 60 (50)444 802 060 Grit 80 (50)444 802 080 Grit 100 (50)444 802 100 Grit 120 444 802 120

Ø178mm

PUMA/FOX HF180 Caddy



r er piece	rack of	Order code
Grit 24	(25)	444 035 200
Grit 36	(25)	444 035 800
Grit 40	(50)	444 035 300
Grit 60	(50)	444 035 400
Grit 80	(50)	444 035 500
Grit 100	(50	444 035 600

Ø178mm

PUMA/FOX HF180 Caddy



TOP Quality

Per piece	Pack of	Order Code
Grit 16	(25)	444 710 016
Grit 24	(25)	444 710 024
Grit 36	(25)	444 710 036
Grit 40	(50)	444 710 040
Grit 60	(50)	444 710 060
Grit 80	(50)	444 710 080
Grit 100	(50)	444 710 100
Grit 120	(50)	444 710 120

PRE-COATING ROLLERS & APPLICATORS





TAPES











Black

Green Blue

White

50m x 50mm roll



Masking - Low Tack

50m x 50mm

Very easy to remove

Single roll



38m x 50mm

Single roll

Silver

White







50mm x 18.3m

Self adhesive - black

Single roll 390 857 000

NAILS, CORK PINS, GIMPS, TAP ITS, BLUED TACKS

















999 999 000







SPRAY ADHESIVE RANGE



A SPRAY ADHESIVE

500ml for carpet, carpet tiles, feltunderlay etc. Variable spray valve.

334 051 200

B CONTACT SPRAY ADHESIVE
An aggressive bonding ideal for

An aggressive bonding ideal for carpet, carpet tilles, vinyls and PVC.

334032000

O VINYL SPRAY ADHESIVE

Anti-plas formulation prevents plasticizer migration. Suitable for all types of vinyl flooring.

90 12

334 051 000

O SOLVENT CLEANER

Removes spillages of oil, grease and adhesive oversprays from skirtings.

334 053 000

E SILICON LUBRICANT

Excellent for lubricatingh blades, threads, needles etc. Non-Greasy.

SLC-1

(ASTRO BOND

Bonds astro-turf material to any solid surface

ASB-1

MULTI-GRIP® Anti-Slip for Rugs!



To efficiently prevent rugs slipping on carpet and hard surfaces, you need two different products, one for carpets and a separate product for hard floors:

Multigrip for Hard Floors is a beige rubberised polyester mesh, which prevents rugs slipping on tiles, slate, wood and laminate floors. It will leave no residue or staining. It can be washed and re-used time after time.

Multigrip for Carpets prevents rugs slipping on carpets and is a beige polyester felt coated both sides in a light resin. It will leave no residue, can be washed but its effectiveness will reduce over time. Vacuum carpet well prior to laying.



Multigrip for CARPETS

0cm x 120cm	Non-Slip for carpets	MH2
0cm x 150cm	Non-Slip for carpets	MH3
20cm x 180cm	Non-Slip for carpets	MH4
60cm x 240cm	Non-Slip for carpets	MH5



Multigrip for HARDFLOORS

60cm x 120cm	Non-Slip for hardfloors	MT2
90cm x 150cm	Non-Slip for hardfloors	MT3
120cm x 180cm	Non-Slip for hardfloors	MT4
150cm x 240cm	Non-Slip for hardfloors	MT5

Multigrip Spray

Can be used for Carpets and on Hardfloors

Anti-Slip Spray to be used on Carpets and H/Floors -Permanent coating for back of Rugs and Mats etc.

Multigrip spray - 400ml

MVC101







TRANSPORT & HANDLING





Carpet Trolley - Large



TECHNICAL SPECIFICATIONS

Load capacity 300kg (660lbs) Tyres Pneumatic Ø400mm (15 ¾") Width 510mm (20") Length 1600mm (63")

with pneumatic wheels

859 003 000

Transport & Unroll Barrow



TECHNICAL SPECIFICATIONS

Load capacity 250kg (550lbs) Tyres Solid rubber Ø160mm (6 1/4") Overall width 560mm (22") Handle distance 650mm (25 1/2")

Transport & Unroll

859 031 000

Transport Barrow 250kg **TECHNICAL SPECIFICATIONS** 25.0kg (550lbs) Load capacity Tyres Pneumatic Ø260mm (10 1/4") Overall width 560mm (22") 859 022 000 Transport & Unroll



Complete with rope, ideal for pulling rolls to the back of a truck tray.



Pulling device

859 061 000

· Ideal for taking along in the delivery van.

Foldup Cart

- · Folds up for stowing in small places.
- · Can handle the heaviest of carpet rolls.
- · Pneumatic tyres make it ideal for use on uneven ground.

TECHNICAL SPECIFICATIONS

Load capacity Tyres

400kg (880lbs) Pneumatic Ø400mm (15 %")

with pneumatic wheels (

859 006 000



Sack Truck



tyres. Includes tyre guards and hand guards. Toe plate 360 x 190mm. Overall height 1180mm

Sack truck

868 581

TRANSPORT & HANDLING

High Back Trolley



COMPLETE WITH
PUNCTURE PROOF
WHEELS "WILL NOT LET
YOU DOWN"

- Made in the UK
- Concave cross-members
- Strong knuckle guard
- High quality powder coated steel



TECHNICAL SPECIFICATIONS

Load capacity 230kg (507lbs)

 Weight
 14kg

 Dimensions
 1410 x 580 x 500mm

 Tvres
 Puncture proof


Guarantee 3 years

Wheels sit within the frame to aid manoeuvrability through doorways and corridors

High back trolley

859 023 000

'P Handle' Sack Truck

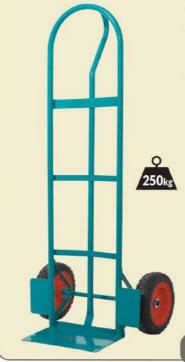

- · Puncture proof wheels
- High quality steel with aqua-blue powder coated finish
- P Handle allows trolley to be laid horizontally for ease of loading especially useful for pulling off lengths of material

TECHNICAL SPECIFICATIONS

Load capacity 250kg (550lbs)

> Weight 10kg

Dimensions 1310x520x460mm

> Tyres Puncture proof

P Handle Trolley 859 005 000

The ROLLI Rolli is a great labour–saving handling device on site or in the warehouse.



Heavy vinyl/lino rolls can be unrolled easily!

Compact unit is ideal for van use, without taking up valuable space. Ideal for bowls and cricket mats.

WORK SMART -SAVE YOUR BACK!!

For a 4m roll 3pcs "Rolli" recommended

For a 2m roll 2pcs "Rolli" recommended

TECHNICAL SPECIFICATIONS

Weight 4.2kg
Dimensions LxWxH 30 x 23 x 10.5cm
Roller on bearings 3pcs
Local capacity max. 350kg



ROLLI - 1 piece

859 016 000

Linoleum Dollies

These popular dollies help solve sheet vinyl handling problems.

They are sturdily constructed to give many years of maintenance free service. They feature non-marking rubber wheels with a 480lb load capacity, and the end frame members are made from sturdy aluminium alloy castings. Both ends have a hand hole for carrying. The rollers are supported on both ends by bar bearings, and are made from heavy gauge steel tubing to resist denting. Both models will accommodate rolls up to 16" in diameter. Rollers have a black powder coat finish. Fixed wheels – non swivel. Suitable for moving/storing roll up mats and carpets in sports halls, ballrooms, schools community centres, etc.



18" Long dolly

No. 15

36" Long dolly

Wheel Lock Dolly

Load approx. 120kg Swivel wheels 2 x 60mm Ø rollers 670mm long x 280mm wide



Wheel lock dolly

859018000

TRANSPORT & HANDLING

Tile Layer's Dolly

For faster, easier tile laying work.



This dolly is made from solid %" hardwood and has a lacquered finish. Has four ball bearing swivel casters with 2" diameter polypropylene wheels. Can also hold miscellaneous equipment and adhesive buckets. Measures 12" wide x 20" long x 4" high. Dolly has a 600lb capacity. Weighs about 9½ lbs.

Tile layers dolly

Bucket Dolly

- 136kg (300lbs) capacity.
- Virtually impossible to tip due to low centre of gravity.
- Castors for easy turning.
- Max bucket diameter 280mm (11")

Bucket dolly

102-BD

3-Wheel Dolly

For moving heavy furniture/equipment. 200kg (440lbs) max load capacity. Height 60mm.

4 per set.



3-wheel dolly x 4 pieces



YANKEE - Super Duty

- Lift, move and wind rolls of carpet/vinyl with ease
- 20cm locking castors & safety lock



852 146 002

852 146 004 4m complete

852 146 005 5m complete

LIFTING & MOVING AIDS

Claw Lifter - Square Panels

Square panels, square spiked for lifting tiled carpet flooring covering.

Claw lifter - square panels

PLCS-1



Claw lifter - round panels

262 428 200

Vacuum Lifter

For lifting up tiled floor coverings with smooth surfaces, e.g. synthetic materials, rubber coverings with studs, linoleum and ceramic tiles.

Vacuum lifter

262 428 100



Suction Lifters



For transporting panels and for making adjustments when laying floor coverings



Double headed 262 428 000

EZ Moves - PRO SLIDES

Available in 4 inch and 6 inch versions

Great to easily move heavy appliances/furniture.

Long enough for good access to large items.

Can be used with large pull handles PH-1 (not illustrated)

4" - 2 per set

4" - 2 per set

Pull handles - set of 2

PH-

product dimensions:

4' EZ Moves

(6 %" wide x 42 %" long foam)

6' EZ Moves

gouge anything that comes in contact with these



WORK CLOTHING

CLASSIC-LINE TROUSERS

janser

ACTIVE-LINE TROUSERS

Colours available:

Black, Red, Grey, Blue, Beige

High quality Beaver-Nylon. Breathable, robust, dirt resistant, airy.

- · Plenty of useful pockets
- The front pouches are angled for easy access - for both right and left hands Sealable back pocket
- · Cordura (the material developed for bullet-proof vests) is used on the knee pockets and is virtually impossible to wear out.



Colours available: Anthracite grey

- · A modern cut floorlayer's trouser - breathable and dirt repellent
- · Knee pockets Cordura with Kevlar coating
- · Hip pocket which can be located on front or to side.
- · Pockets for tape measure/knife/pens
- Mobile pocket and key loop also featured



Clasic-line trouser

When ordering please specify - COLOUR, WAIST, INSIDE LEG

Active-line trouser



WE ALSO STOCK Snickers & Blaklader



General Purpose Dust Mask

Disposable and lightweight for non-toxic dusts and easy breathing.



50 per pack

119 000 000

Dust Mask Mod 3505

PROTECTION LEVEL FFP3 SD

Active foam with climate valve. Protects and reduces risk from disease inducing wood dust. Large filter area and new folded filter means long life and reduced costs.

Back Support Belt

5 per pack

For carrying heavy

ensures normal easy

velcro fastening

loads or when

bending. The

elastic

material

Medium Large

Extra Large

Extra Extra Large

119 300 000

161 100 980

161 100 984

161 100 983 161 100 986

Dust Mask Mod 2495

PROTECTION LEVEL FFP2

With SoloBand® Climate Valve® EN 149:2001. PVC Free FFP Mask with Dura Mesh outer lining. Comfortable nose seal. Easy to put on & take off, even with gloves.

1 piece

119 250 000

Shoe Covers Blue

For floor layer's shoes

Made of durable fabric, fused with a rubber sole. Can easily be pulled over any floor layer shoe.



size 40 - 42 119 602 002 size 43 - 45 119 602 003 size 46 - 49 119 602 004

Pro. Flooring Booties

VINYL BOOTIES - For carpet & other textile flooring as well as for wet hard surface flooring. WATER RESISTANT & SLIP RESISTANT.



CLOTH - For parquet floors & other hard surface flooring. ABSORBANT TO LIQUID & SLIP RESISTANT.

Vinyl - x10

119 601 000

Cloth - x10

119 600 000

Fingerless Gloves

With Techno Grip® strengthed surface for better grip and protection.



Large - 1 pair 119 800 100

XLarge - 1 pair 119800 200

Cut Resistant Gloves

Grey Polyurethane Coated Cut 5 Gloves which are highly cut resistant, with excellent grip and flexibility.

The palm and fingers are coated with polyurethane and have a knitted seamless liner.

Large

CRG XI

ECONOMY GLOVES & OVERSHOES

Latex Gloves

Single use, non-sterile and lightly powdered



Large 100 pkt

DIG

Medium 100 pkt DLG-M

Vinyl Gloves

Vinyl disposable Pre-powdered



Large 100 pkt 675052

PVC Gloves

Red comfortable knitted wristband



447137

1 pair

Overshoes



10 pairs

119 601 000

100 pairs

119 601 200

2000 pairs

119 601 200

TOOL BOXES

JANSER FLOORLAYERS TOOL BAG The only tool bag specifically designed for floorlayers.

This specially designed tool bag is ideal for storage of all tools used for floor laying and carpentry.

It has 15 exterior pockets, a tape and a tape measure holder as well as a name tag. There are 22 practical pockets and holders inside the tool bag. Long enough to accommodate a Knee Kicker.

The two sturdy Velcro strips enables you to carry telescopic handles, spirit levels and other tools too long to fit in the bag. The solid handles are made of metal with a comfortable, ergonomic grip.

TECHNICAL SPECIFICATIONS

Material 600D Polyester Dimensions LxWxH 60 x 30 x 30cm (23 1/2"x 11 7/8"x 11 7/8")

Weight 3kg (6.6 lbs)

Comes without tools

Floorlayers tool bag 262 443 700



STRONG WHEELED Canvas Trolley



STANLEY Tool Box - 26"

- 26" HD Tool Box
- Soft rubber bumper corners
- 24" tray
- Tools not included

All other Stanley Tool Bags available

STANLEY Tool box

097 94 24

Canvas Tool Box - 30"

- 30" HD canvas tool box
- Zip fastener
- Studded fibre board base
- 2 end pockets

Canvas tool box

CVPT-30



Zipped 24" Tool Bag

Zip up 24" tool bag, features internal and external tool pouches.

Zipped 24"



FAICT-B34

Traditional Boat Bag - 33'

- Durable hessian
- Rope reinforced handles
- Easy access tools
- Brass eyelets
- 33" Long

Boat bag

FAICT-B33



CANVAS TOOL BAGS

- 30" (760mm) Canvas
- Very strong canvas bag double stitched seams

Webbing handles

262 491 000

Rope handles 262 492 000



Webbing handles

Starter Carpet Fitting Tool Kit

Contains:

- Carry case
- · Janser conventional Knee Kicker
- All staple hammer
- Dolphin knife
- Tack and moulding lifter
- Chalk line
- Gripper shears
- Wide stair tool
- 8M tape
- Box staples 8mm

Starter carpet fitting tool kit

BCFK-1



PACKAGING & LABELLING



FLOOR PROTECTION



WHIPPING & CUTTING

Miniket®2000



Maxiket Economy



Training available

A universal machine suitable for carpets, mats and carpet skirtings. This handy whipping machine utilising the latest technology offers every specialist carpet business and every carpet seller new possibilities to create more desirable products, set up more attractive displays and give a faster whipping service.

The Miniket® 2000's capability of whipping very deep-pile carpets with latexed jute backing is unrivalled. Surplus off-cuts of carpet can be quickly and effectively turned into bathroom mat sets, door mats, runners or carpet skirtings.

Miniket 2000

658 000 000

Bench mounted, quiet in operation, high speed whipping.

TECHNICAL SPECIFICATIONS

Power supply 230V

Capacity max 450 m/h (1500/h)

Stitching spacing adjustor

Compressed air system for pressure pedal

Maxiket machines are designed for high volume work or industrial whipping (serging). 380V version not available.

Complete with work table and drive motor 658 900 000

WHIPPING MACHINES YARN / EDGING TAPE / THREAD / BINDING TAPE

Twisted Polyamide Yarn



Industrial grade nylon filament yarn, in spools of 1kg" - please specify colours required - colour chart available.

6586*

Whipping Tape



Material is cotton indanthrene bias binding 11 colours

Thread for machines



Sewing thread made of polyester/cotton mixture, approx. 2500m (2735 yds) per spool.

Available in 9 colours

658 80°

Line Thread



Single strand, nylon transparent, grade 850 Den Large Reel 250g (8.8oz) for Miniket 2000

658 808 100

Jumbo Reel 695g (25oz)



For Maxiket and industrial whipping

658 808 000

See www.janser-uk.co.uk for yarn colours available.

MY ORDERS

page	product	order code	quantity
TO BE		(A)	1/10-11
		786	
		fills.	
		White Land	
- CONT. 100			
7356			
1166			
7			

CONDITIONS OF SALE

Quotations by the Company are invitations to treat. A contract only arises on the Company's written acceptance of an order. No subsequent variation shall bind the Company unless confirmed in writing.

The Company may without notice make such adjustments of contract price as it shall consider appropriate having regard to changes in cost of production, overheads, transportation and insurance. Goods will be charged at prices ruling at date of despatch.

Goods invoiced at £200.00 or over will be despatched carriage paid within the United Kingdom. Carriage on orders less than £200.00 will be payable by the buyer at cost.

The Company will not accept responsibility for any damage to goods or shortage in quantity of goods unless reported to the Company and to the Carriers in writing within 3 days of delivery, nor for non-delivery unless reported in writing to the Company within 10 days of date of invoice. If these conditions are not fulfilled the carriers may repudiate liability and the Company cannot enquire into the complaint and will look to the Purchaser for payment in full.

Until the Buyer has paid the price in full, the property in the goods shall not pass to the Buyer and the Buyer shall be obliged to store the goods in such a way as to enable them to be identified as the property of the Company. So long as the property in the goods remains in use and if payment of the price or any part thereof shall be overdue, without prejudice to any other remedies we shall be entitled to at any time to recover and resell the same and for these purposes to enter upon any premises of the Buyer and to retake possession of the goods.

Where the property in the goods has not passed to the Buyer, the Buyer shall be entitled to sell the same, but any such sale shall be deemed to be for our account and any proceeds thereof shall be held by the Buyer as Trustee for the Company until the price is paid in full. Upon notice from the Company, the Buyer shall be obliged to assign all rights that he has against his customers.

No responsibility is accepted for goods returned without the Company's prior written authority. Return freight and a handling charge of 10% of net billing price will be charged unless the Company is at fault. The Buyer shall insure the goods for the period covering the return to the Company's works.

TERMS OF SETTLEMENT

Payment by Account Holders strictly 30 days from date of Invoice

Interest is payable on any account becoming overdue in accordance with the stated settlement terms, and will be calculated at the rate of 2% per calendar month.

Value Added Tax will be charged on the total invoice value at the standard rate.

All JANSER products are of the finest quality and workmanship and are warranted to be free from manufacturing defects, and faulty material of which the Company receives written notice within six month from delivery will be replaced. No other guarantee is given and any other express or implied warranty or condition, statutory or otherwise, is hereby excluded.

All contracts shall be governed by and construed in accordance with English Law.



Germany

Hungary

Czech Republic

Switzerland

Poland

Janser Group

Great Britain

Italy

France

Croatia

Austria

Janser

Janser UK Limited

Coombs Wood Business Park

Coombs Wood Way

Halesowen

West Midlands

B628BH

t: 0121 561 5888

f: 0121 561 3330

e: sales@janser-uk.com

order line: 0121 561 5888

www.janser-uk.co.uk